



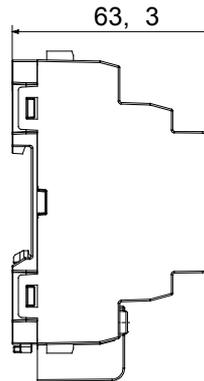

The 10 A 4-channel KNX actuator enables independent control of up to 4 electrical loads via built-in relays with normally open (NO) output contact. The device receives switching commands via the KNX bus, from control devices or sensors, or locally via front buttons. It is powered directly from the bus line and is equipped with 4 green LEDs on the front that indicate the status of the outputs. The actuator communicates the status of the relays on the bus when it is turned on, when a command is received, or when a local action is taken. Each channel can be independently configured to execute ON/OFF, timed, scenario, or forced status commands via priority commands. The different operating modes can coexist through separate communication objects. Installation is on DIN rails, inside electrical panels or junction boxes.

קטגוריה	תקשורת	KNX
ספק כוח	ממשקים	KNX TP1
זרם שנספג על ידי KNX bus (mA)	מהדקי חיווט	עם בורג
יכולת הידוק מהדקים כבלים תקועים (ממ"ר)	Max. 4	KNX bus מהדק
פועל טמפרטורה	טמפרטורת אחסון	-25 +70 °C
דרגה IP	IP20	93% מקס
סטנדרט	Low Voltage Directive 2014/35/EU - Electromagnetic Compatibility Directive 2014/30/ EU - EN50428, EN50090-2-2	Corrente max di commutazione 4 W
מס' יציאה ערוצים	4	יציאה מגעים 4NO, 10A (AC1230 (V AC
Max switching current (A)	10A (cos= 1)	230V מנורות ליבון-הלוגן 1500 W
Non-phasor-corrected fluorescent loads	400 VA	Loads driven by electronic transformers 600 VA
Low-consumption lamps (compact fluorescent)	8x23W	

DIMENSIONAL

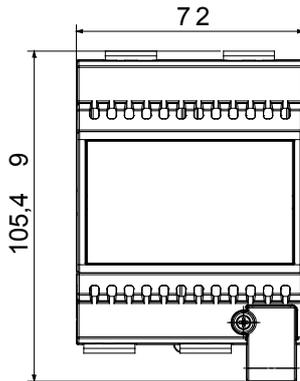

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

