
Product Data Sheet
DX10020R
FK Range



Light pliable conduits FK9 range, made of PVC, classification 22212, available in six diameters, from 16 to 50 mm, with or without cable puller, colour grey RAL 7035. Suitable for electrical and/or data transmission systems. Recommended for concealed installation in vertical walls or ceilings. The FK9 conduits comply with the standards EN 61386-1 and EN 61386-22.

Colour	Grey RAL 7035	Material	PVC
Type	without cable puller	Conduits Ø (mm)	20
Glow Wire Test	960 °C	Resistance to compression	2 (Light - 320 N)
Resistance to impact	2 (Light - 320 N)	Resistance to bending	2 (Pliable)
Electrical characteristics	2 (With electrical insulating characteristics)	Protection against ingress of solid objects without accessories	0
Protection against ingress of water	0	Resistance against corrosion	Not applicable to plastic conduit systems
Fire resistance	1 (Non-flame propagating)	Protection against ingress of solid objects with GF coupling	4
Standard	EN 61386-1 EN 61386-22	Classification	22212

DIMENSIONAL

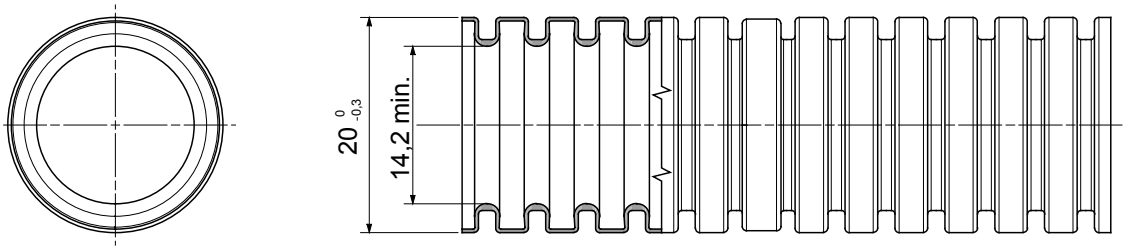

TECHNICAL SYMBOLOGY

GWT 320N

960 °C

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 15/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice