Product Data Sheet

GWA9151


Home&Building Pro



KNX Secure 4-channel 16 AX actuator that allows to independently activate/deactivate up to 4 different electrical loads via 4 relays, each 16 AX and equipped with 1 NO output contact. The relay switching command can arrive from command devices or sensors of the Building Automation system, via the KNX BUS, or be locally generated by the front push-buttons. The actuator is powered from the BUS line and is equipped with 4 front green LEDs for a NO the output status. Each output channel of the actuator can be independently configured, and used for the ON/OFF commands of the commanded loads, the execution of timed commands, the management of scenes, and the execution of priority commands for forcing the output status.

Kategorie	Řada ChoruSmart	Typ	Command devices
Skupina	Aktuátory KNX na lištu DIN	Kategorie	Zapnuto/vypnuto
Komunikace	KNX Secure	Počet modulů DIN	4
Zdroj napájení	Via KNX BUS, 29 V DC SELV	Rozhraní	KNX TP1
Proud absorbovaný sběrnicí KNX (mA)	Max. 10 mA při 29 V	Rozptýlený výkon (W)	4
Počet výstupních kanálů	4	Výstupní kontakty	4 NA 16 AX 230 V ac
Zapojovací svorky	Se šroubem	Kapacita utahování svorek pletené kabely (mm²)	Max. 4 mm²
Připojení na sběrnici KNX	Sběrnicová svorka KNX	Klasické halogenové žárovky 240 V AC	3000 W
Zatížení řízená toroidními transformátory	3000 W	Zatížení řízená elektronickými transformátory	2000 W
LED kontrolky 230 V	400 W	Pracovní teplota	-5 ÷ +45 °C
Teplota skladování	-25 - +55 °C	Krytí IP	IP20
Norma	RoHS Directive 2011/65/EU+2015/863 - EN IEC 63000 Low Voltage Directive 2014/35/EU_x000D_; Electromagnetic Compatibility Directive 2014/30/EU EN 60669-2-1		

DIMENSIONAL

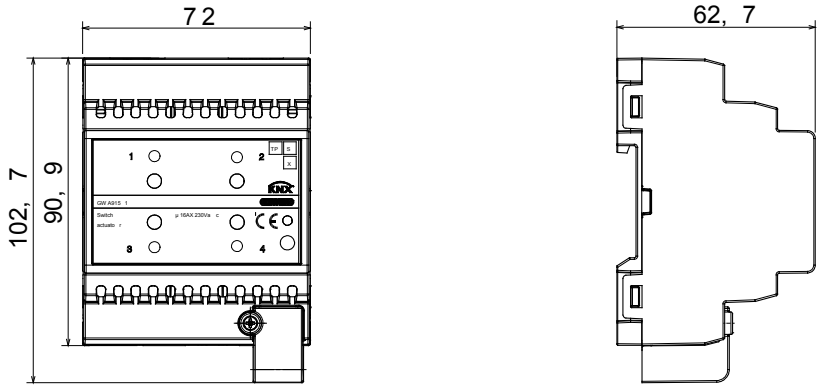

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 10/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice