
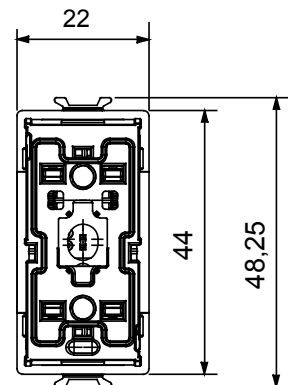


Flush-mounting axial auxiliary module with one command. An axial push-buttons on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The module with 1 auxiliary axial command can also be used to directly command small resistive or weakly inductive loads such as ringers and buzzers (max. 10VA);. The device must be completed with one of the front buttons key available.

| | | | |
|--|--|---|-----------------------------|
| Descriere | Comandă axială auxiliară cu 1 canal | Alimentare electrică | 100 ÷ 240 V c.a. - 50/60 Hz |
| Nr. module | 1 | Nr. canale de intrare | - |
| Comandă locală | Prin intermediul butonului frontal (pentru a finaliza cu tasta buton) | Tensiune canal intrare auxiliară | - |
| Temperatura de stocare | -25 ÷ +70 °C | N. of LED input channels | 1 |
| Temperatura de lucru | -5 ÷ +45 °C | LED input channels voltage | 100 ÷ 240 V c.a. - 50/60 Hz |
| Umiditate relativă (necondensată) | Max. 93% | Nr. canale de ieșire | 1 |
| Semnalizare cu lumină frontală | LED albastru | Contacte ieșire | 1A (AC1) |
| Borne de cablare | Conținut | Lămpi cu halogen incandescent de 240 V c.a. | - |
| Capacitate de strângere borne cabluri torsadate (mm ²) | Max 1,5 | Lămpi LED de 240 V c.a. | - |
| Capacitate de strângere a bornelor cabluri solide (mm ²) | Max 1,5 | Sarcini pilotate de la transformatoare electronice 240 V c.a. | - |
| Context | Dry indoor places | Lămpi fluorescente de 240 V | - |
| Grad IP | IP20 (cu buton) | Controlul sarcinii | - |
| Standard | 2014/35/EU (LVD), 2011/65/EU + 2015/863 (RoHS), EN 60669-1, EN IEC 63000 | | |

DIMENSIONAL

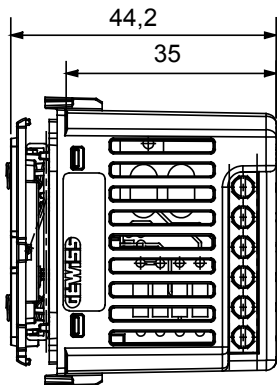

TECHNICAL SYMBOLOGY

IP

IP20 (cu buton)

STANDARDS/APPROVALS

