




Wi-Fi communication interface module (GWD0953) must be coupled on the right side of ReStart RD PRO 2P and RM PRO 2P. Thanks to Wi-Fi ReStart APP, you can monitor the system status in real time and everywhere. You can see the values of the energy produced and consumed, the active and reactive power, the current and the voltage of the system.

Opis	Moduł interfejsu WiFi	Kod	90 ReStart range
Liczba modułów EN 50022	1	Odpowiedni dla	ReStart Rd PRO 2P / ReStart Rm PRO 2P
Prąd częstotliwość (Hz)	50	Prąd wyjściowe	230/240 V a.c.
Maksymalna moc zużycie	1,6 W	Temperatura robocza	-25 +60 °C
Znamionowe wytrzymałwane napięcie impulsowe	4 kV	Znamionowy moment dokręcania	0,4 Nm
Temperatura przechowywania	-40 +70 °C	Znamionowe napięcie izolacji (Ui)	500 V
Norma	EN 61326-1; EN 301489-1; EN 301489-17	System dystrybucyjny	TT - TN-S
Obszar zacisków	2.5 mm ²	Minimum requirements of the operating system	Android 4.4 / iOS 9
Wi-Fi communication	2.4	Maximum Wi-Fi range	100m free space trasmission (towards router) - 80m free space trasmission (other directions)
Maximum measurable current	80 A	CT maximum cable section	25 Quadratmillimeter
Measure of electrical parameters	Tak		

DIMENSIONAL

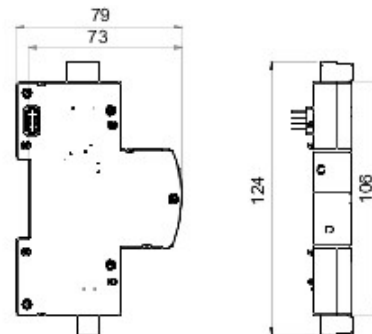

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 12/05/2021

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice