
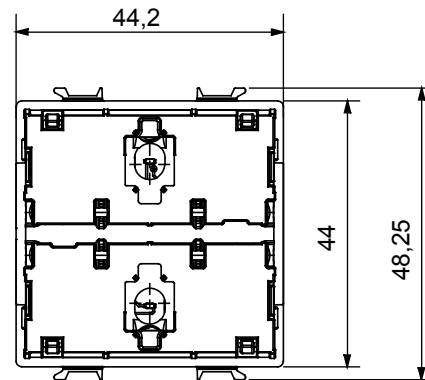


Flush-mounting axial dimmer module. Two axial push-buttons on the front for switching the connected load ON and OFF (short press) or for regulating the brightness (long press). The device must be completed with one of the front buttons key available. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

Description	Axial dimmer module	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	2	No. input channels	2
Local control	Via 2 front push buttons (to complete with button key)	Auxiliary input channel voltage	100 ÷ 240 V ac - 50/60 Hz
Stocking temperature	-25 ÷ +70 °C	N. of LED input channels	-
Working temperature	-5 ÷ +45 °C	LED input channels voltage	-
Relative humidity (non-condensative)	Max 93%	No. output channels	1
Front light signaling	Blue led	Output contacts	-
Wiring terminals	With screw	240 V ac Incandescent-halogen lamps	4-150 W
Terminal tightening capacity stranded cables (mm <sup>2</sup> )	Max. 1,5	240 V ac LED lamps	4-150 W (max 10 lamps)
Terminal tightening capacity solid cables (mm <sup>2</sup> )	Max. 1,5	Loads piloted from electronic transf. 240 V ac	4 ÷ 150 VA (240 V ac)
Context	Dry indoor places	240 V Fluorescent lamps	-
IP degree	IP20 (with button key)	Load control	Trailing edge
Standard	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000		

### DIMENSIONAL

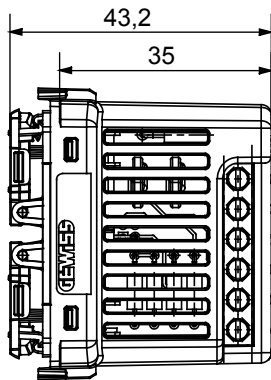

### TECHNICAL SYMBOLOGY

## IP

IP20 (with button key)

### STANDARDS/APPROVALS

