




A range of tabletop panels, wall boxes and self-supporting wall enclosures suitable for housing ChorusSmart modular devices. Wall boxes and panels, available in black and white, must be completed with ChorusSmart support and One plates. The self-supporting enclosures, available in grey RAL 7035, are characterised in IP40 and IP55 versions: both have pre-cut knockouts, and the watertight version is also provided with a door with a transparent UV membrane. Self-supporting boxes and enclosures are designed to be fitted with an earth terminal.

|                          |                              |                           |                     |
|--------------------------|------------------------------|---------------------------|---------------------|
| Description              | 4 modules                    | Colour                    | Grey RAL 7035       |
| No. knockout holes Ø23   | 8 on sides / 1 on the bottom | Type of knockout holes    | Removable with tool |
| IP degree                | IP55                         | Insulation class          | II                  |
| Mechanical resistance    | IK07                         | Lid screws                | Stainless steel     |
| Torque screws tightening | 0.8 NM                       | Outer dim. LxHxD (mm)     | 132x82x69           |
| Glow wire test           | 650 °C                       | Thermo-pressure with ball | 70 °C               |
| Standard                 | EN 60670-1                   | Installation temperature  | -25 +60 °C          |
| Electrocod               | 0212                         |                           |                     |

### DIMENSIONAL

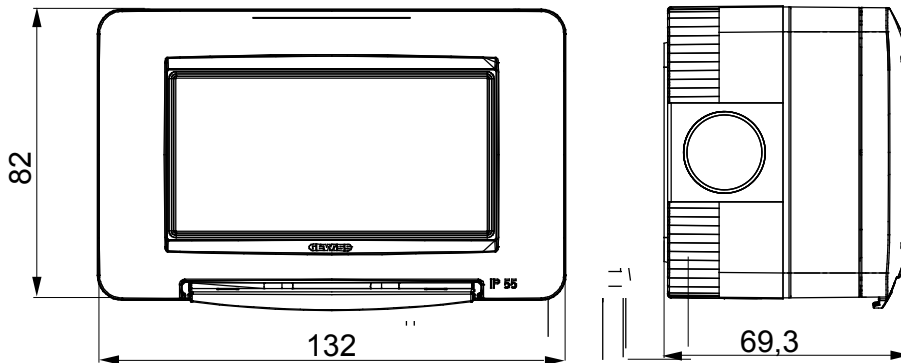

### TECHNICAL SYMBOLOGY



**IK**

IK07

**GWT**

650 °C

70 °C

IP55

### STANDARDS/APPROVALS

