Product Data Sheet
GW40336
40 CDE




Spanish standard flush mounting enclosure IP40 with transparent door to house ICP power limiting circuit breaker.
Sealable.


Insulation class	II	Rated current (A)	40
Outer dim. LxHxD (mm)	329x225x75	IP degree	IP40
Installation	Flush mounting enclosures	Mechanical resistance	IK07
Rated voltage (V)	400	R.U. 1407-D Classifications	CCE-ICP32
Door colour	Smoked Transparent	No. EN 50022 mod. ICP sect.	4
N. EN 50022 mod. CB section	8	Glow Wire Test	650 °C
Standard	IEC EN 60670-1; IEC EN 60670-24	Operating temperature	-15 ÷ +60°C
Insulation voltage (Ui)	750 V	Thermo-pressure with ball	70 °C
Type of knockout holes	Removable with tool	Type of enclosure	GP
Dispersible power (W)	9+14		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluited	Concentrated	Diluited	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Resistant

DIMENSIONAL

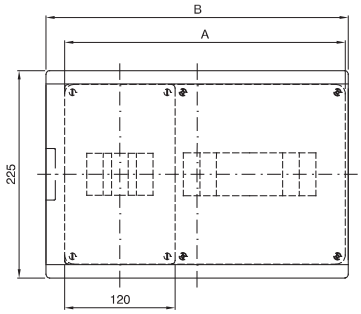



		A	B
4+8M	GW 40 336 GW 40 338	305	328,5
4+12M	GW 40 337 GW 40 339	372	400


TECHNICAL SYMBOLOGY


II

IP
IP40

IK
IK07

GWT
650 °C



-15 ÷ +60°C


70 °C


Removable with tool

STANDARDS/APPROVALS

CE Reach Declaration

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 07/11/2026

Data, measures, designs and pictures are shown only as informative purposes,
and could be changed without previous notice