





The range of IP40 protected flush mounting enclosures offers sizes from 2 to 72 modules, available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application). They can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

|                                  |                                              |                           |                                            |
|----------------------------------|----------------------------------------------|---------------------------|--------------------------------------------|
| Insulation class                 | II (according to IEC 61140 standards)        | Colour                    | White RAL 9016                             |
| Outer dim. LxHxD (mm)            | 465x880x95                                   | IP degree                 | IP40                                       |
| Installation                     | For brick wall                               | Dispersible power (W)     | 95                                         |
| Mechanical resistance            | IK08                                         | Rated voltage             | 400 V                                      |
| Door colour                      | Blank                                        | No. of modules EN 50022   | 72 (18x4)                                  |
| Rated current                    | 125 A                                        | Glow Wire Test            | 650 °C                                     |
| Operating temperature            | -15 ÷ +60°C                                  | Type of material          | Halogen-free in compliance with EN 60754-2 |
| Electrocod                       | 0311                                         | Thermo-pressure with ball | 70 °C                                      |
| Standard                         | EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49 | Insulation voltage        | 750 V                                      |
| Max. installable terminal blocks | 4 x 18 modules                               |                           |                                            |

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids         |                    | Bases         |                    | Solvents  |               |               |                    | Mineral oil        | UV rays            |
|-----------------|---------------|--------------------|---------------|--------------------|-----------|---------------|---------------|--------------------|--------------------|--------------------|
|                 | Concentrated  | Diluted            | Concentrated  | Diluted            | Hexane    | Benzol        | Acetone       | Ethyl alcohol      |                    |                    |
| Resistant       | Not resistant | Limited resistance | Not resistant | Limited resistance | Resistant | Not resistant | Not resistant | Limited resistance | Limited resistance | Limited resistance |

#### DIMENSIONAL

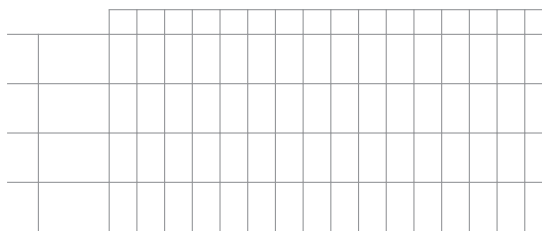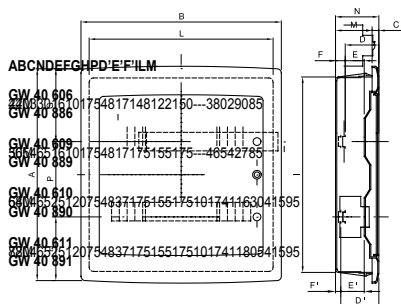

#### TECHNICAL SYMBOLOGY



II (according to IEC 61140 standards)

IP

IP40


IK

IK08

GWT

650 °C

INSTALLATION



-15 ÷ +60°C



Halogen-free in compliance with EN 60754-2



70 °C

#### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09  
Company subject to the management and coordination of Polfin S.p.A.

www.gewiss.com  
sat@gewiss.com  
Last update 02/09/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice