



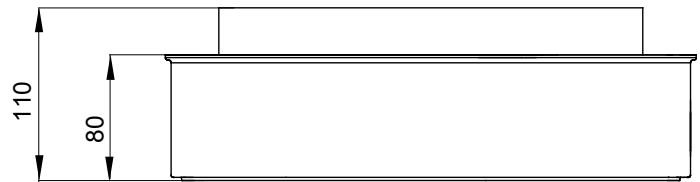

IP degree	IP67	Mechanical resistance	IK08
Houseable interloc. socket	1	Houseable IB socket-outlets	63 A
Top entries	2xØ 29/37	Bottom entries	1xØ 37/47
Glow Wire Test	650 °C	For socket-outlets	Vertical fixed 63 A CBF
Electrocod	2222		

### DIMENSIONAL

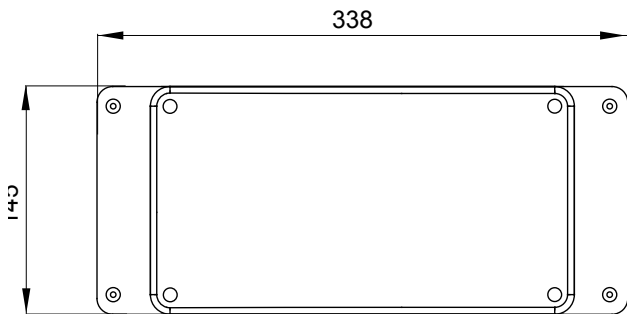

### TECHNICAL SYMBOLOGY

**IP**      **IK**      **GWT**

IP67

IK08

650 °C

### STANDARDS/APPROVALS

