
Product Data Sheet

GW66681


IB Range



-

For walls	Brickwall	Glow Wire Test	650 °C
Houseable interloc. socket	1	IP degree	IP44
Mechanical resistance	IK08	Houseable IB socket-outlets	16/32 A
For socket-outlets	SBF horizontal	Electrocod	2220
Drilling bottom	Through multidiameter cutter	Minimum installation temperature	-15°C

DIMENSIONAL

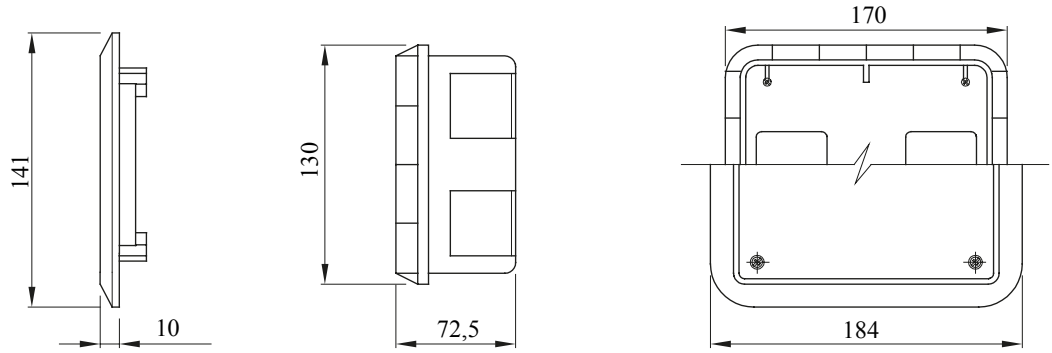

TECHNICAL SYMBOLOGY

GWT	IP	IK
650 °C	IP44	IK08

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 07/11/2026

Data, measures, designs and pictures are shown only as informative purposes,
and could be changed without previous notice