
# Product Data Sheet

# GW66681PM


Green Wall range



-

| | | | |
|---|---|---|---|
| For walls | Plasterboard | For 44 IB socket-outlets | 16/32 A SBF |
| Houseable interloc. socket | 1 | IP degree | IP44 |
| Mechanical resistance | IK08 | Houseable IB socket-outlets | 16/32 A |
| For socket-outlets | SBF horizontal | Electrocod | 2220 |
| Glow wire test | 850 °C (bottom) - 650 °C (frame) | Drilling bottom | Through multidiameter cutter |
| Minimum installation temperature | -15°C | | |

## DIMENSIONAL

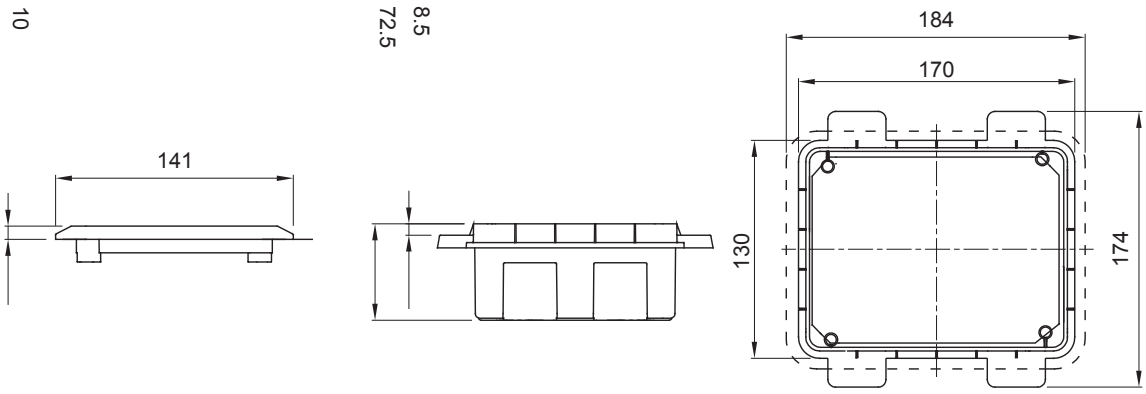


## TECHNICAL SYMBOLOGY

| IP | IK | GWT |
|---|---|---|
| IP44 | IK08 | 850 °C (bottom) - 650 °C (frame) |

## STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 01/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice