


Product Data Sheet


GW66681PM

Green Wall range



For walls	Plasterboard	For 44 IB socket-outlets	16/32 A SBF
Houseable interloc. socket	1	IP degree	IP44
Mechanical resistance	IK08	Houseable IB socket-outlets	16/32 A
For socket-outlets	SBF horizontal	Electrocod	2220
Glow wire test	850 °C (bottom) - 650 °C (frame)	Drilling bottom	Through multidiameter cutter
Minimum installation temperature	-15°C		

DIMENSIONAL

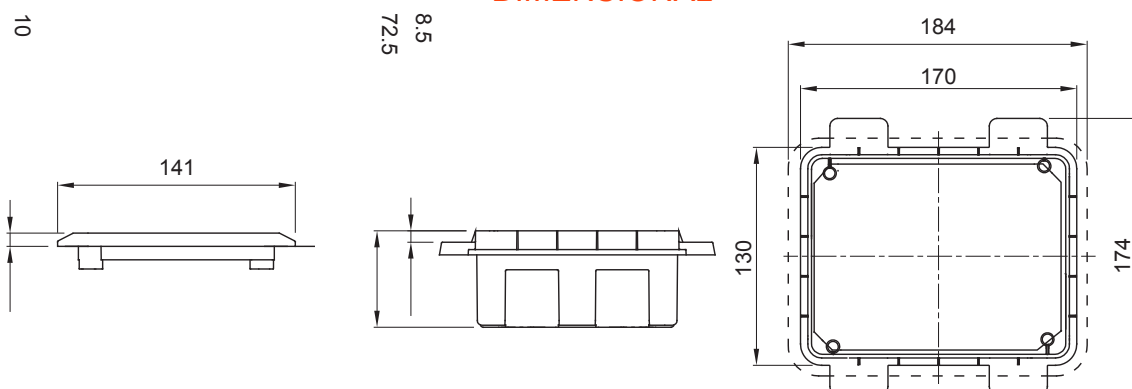

TECHNICAL SYMBOLOGY

IP

IP44

IK

IK08

GWT

850 °C (bottom) -
650 °C (frame)

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and
coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 02/09/2026

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice