Product Data Sheet

GW66683PM

IB Range




-

For walls	Plasterboard	Houseable interloc. socket	1
IP degree	IP55	Mechanical resistance	IK08
Houseable IB socket-outlets	16/32 A SBF / CBF / Automatika	Electrocod	2220
Glow wire test	850 °C (bottom) - 650 °C (frame)	For 67IB socket-outlets	-
Drilling bottom	Through multidiameter cutter	Minimum installation temperature	-15°C

DIMENSIONAL

49

5

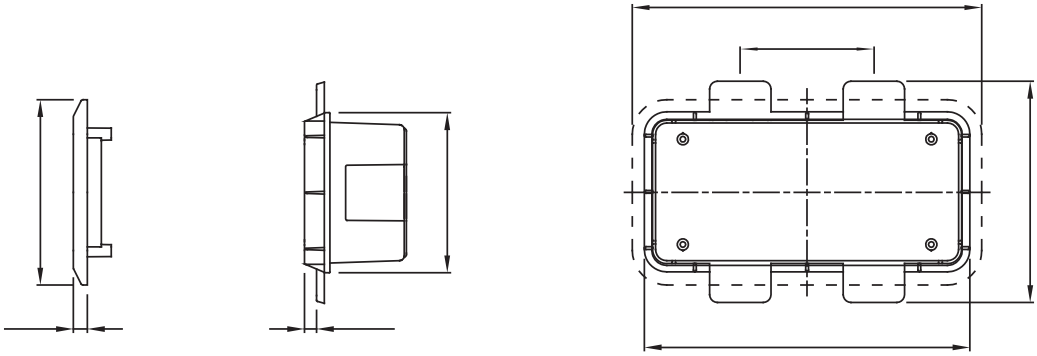

TECHNICAL SYMBOLOGY

IP	IK	GWT
IP55	IK08	850 °C (bottom) - 650 °C (frame)

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 07/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice