

Product Data Sheet

GW66683PM

IB Range




For walls	Plasterboard	Houseable interloc. socket	1
IP degree	IP55	Mechanical resistance	IK08
Houseable IB socket-outlets	16/32 A SBF / CBF / Automatika	Electrocod	2220
Glow wire test	850 °C (bottom) - 650 °C (frame)	For 67IB socket-outlets	-
Drilling bottom	Through multidiameter cutter	Minimum installation temperature	-15°C

DIMENSIONAL

49
5

32

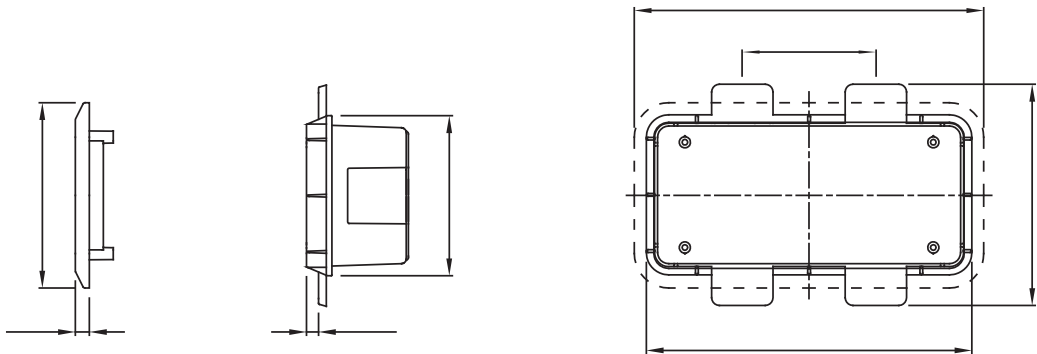

TECHNICAL SYMBOLOGY

IP

IP55

IK

IK08

GWT

850 °C (bottom) -
650 °C (frame)

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and
coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 02/09/2026

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice