Product Data Sheet

GW66691


IB Range




-

Top entries	4xØ 23	Glow Wire Test	650 °C
Houseable interloc. socket	2	IP degree	IP55
Mechanical resistance	IK08	Side entries	4xØ 23
Bottom entries	1xØ 29	Houseable IB socket-outlets	16/32 A
Electrocod	2221	Minimum installation temperature	-25°C

DIMENSIONAL

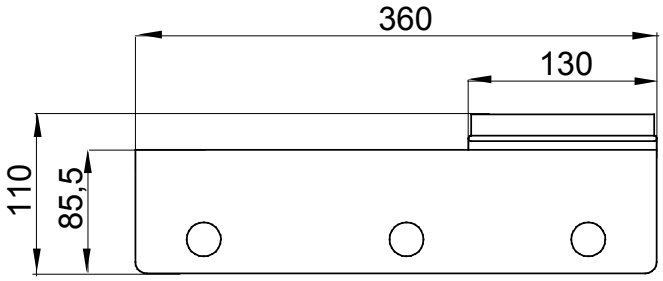

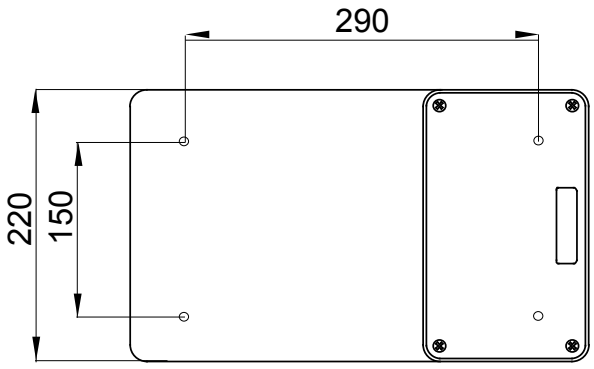

TECHNICAL SYMBOLOGY

GWT	IP	IK
650 °C	IP55	IK08

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 09/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice