# Product Data Sheet

# GW66696


## IB Range



-

| | | | |
|---|---|---|---|
| IP degree | IP66 | Mechanical resistance | > IK10 |
| Houseable interloc. socket | 1 | Houseable IB socket-outlets | 16/32 A SELV |
| Side entries | 2xØ 23 | Top entries | 2xØ 23/29 |
| Bottom entries | - | Glow Wire Test | 850 °C |
| Suitable for | Heavy duty | Electrocod | 2222 |
| Impact resistance at -20 °C | 20 J | | |

## DIMENSIONAL

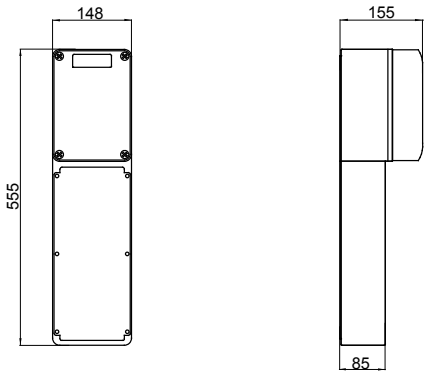


## TECHNICAL SYMBOLOGY

| IP | IK | GWT |
|---|---|---|
| IP66 | > IK10 | 850 °C |

## STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 03/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice