




Top entries	2xØ 23	Glow Wire Test	650 °C
IP degree	IP67	Mechanical resistance	IK08
Bottom entries	1xØ 29/37	Electrocod	2222
Houseable IB socket-outlets	N. 1 IEC 309 16-32 A IP44/67 + N.1 16 A MAX 3P+E or GW27401/GW27403	Minimum installation temperature	-25°C

DIMENSIONAL

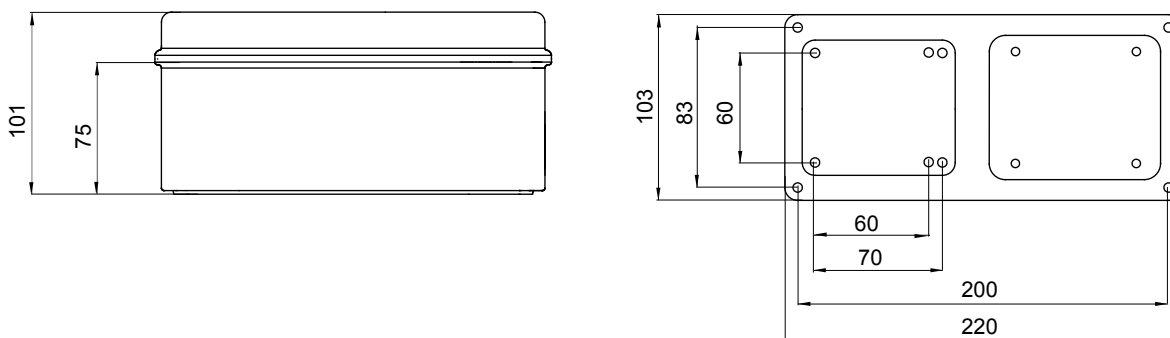

TECHNICAL SYMBOLOGY

GWT

650 °C

IP

IP67

IK

IK08

STANDARDS/APPROVALS

