



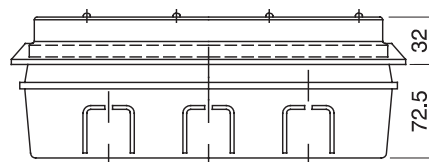

For walls	Plasterboard	Glow Wire Test	650 °C
IP degree	IP55	Mechanical resistance	IK08
Electrocod	2222	Houseable IB socket-outlets	N. 1 IEC 309 16-32 A IP44/67 + N.1 16 A MAX 3P+E or GW27401/GW27403
Drilling bottom	Through multidiameter cutter	Minimum installation temperature	-15°C

DIMENSIONAL

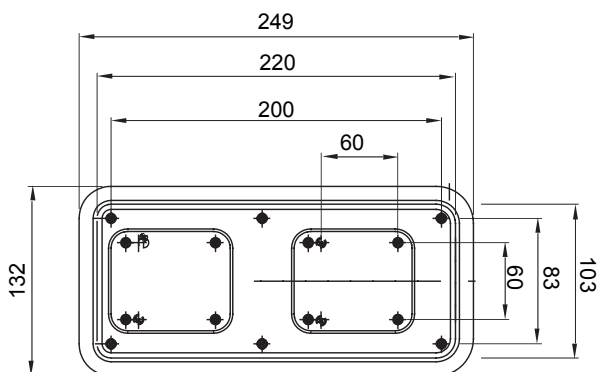

TECHNICAL SYMBOLOGY

GWT

650 °C

IP

IP55

IK08

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and
coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 11/09/2026

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice