
Product Data Sheet
GW66783
IB Range



-

IP degree	IP66	Dispersible power (W)	34
Mechanical resistance	> IK10	Houseable interloc. socket	3
Houseable IB socket-outlets	16/32 A SELV	No. of modules EN 50022	18
Side entries	2xØ 23	Top entries	5xØ 23/29
Bottom entries	1xØ 29/37	Glow Wire Test	850 °C
Suitable for	Heavy duty	Electrocod	2222
Impact resistance at -20 °C	20 J		

DIMENSIONAL

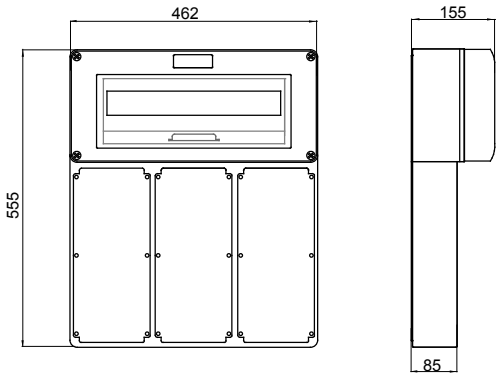

TECHNICAL SYMBOLOGY

IP	IK	GWT
IP66	> IK10	850 °C

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 12/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice