Product Data Sheet

GW68521

68 ACS Range




The main supply boards for the construction site type 68 QP ACS and 68 CDK ACSK: installed immediately downstream from the energy meter, to protect the line from the delivery board to the main site distribution board. They are available in versions with power from 17 kW (32A) to 130 kW (250A), all fitted with an emergency push-button.

Type	QP ACS	board type	Wired
Colour	Grey RAL 7035	Outer dim. LxHxD (mm)	405x500x200
Weight (kg)	16	Accordance with Standards	EN 61439-4 (ACS)
Characteristics	UV resistance (EN 62208)	IP degree	IP66
Mechanical resistance	IK10	Glow wire test	960 °C
Thermo-pressure with ball	200 °C	Insulation class	II
No. of poles	4	Power suppliable (kW)	60
Mains switch	MTHP 125	RCCB protection	Residual current relay with separate toroid
MCB'S MT main RCCB	RCCB 125 A 4P adjustable - A type	Emergency push-button	Yes

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluited	Concentrated	Diluited	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Not resistant	Limited resistance	Resistant	Resistant

DIMENSIONAL

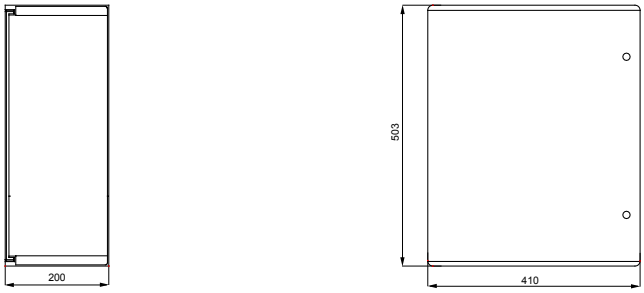

TECHNICAL SYMBOLOGY

EN 61439-4 (ACS)

UV resistance (EN 62208)

IP66

IK10

960 °C

200 °C

II

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 14/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice