



70 RT HP is a complete offer of rotary isolator switches from 16 A to 160 A, available in boxes both in insulating material and aluminium, in control or emergency versions, compatible with the main applications for residential, tertiary and industrial contexts.

DC versions for photovoltaic applications are also available from 16 A to 40 A in insulating box.


The series is completed with versions for board from 16 A to 1000 A and for DIN rail fixing from 16 A to 63 A, which can be equipped with auxiliary contacts.

The devices have been designed to reduce wiring time, facilitate installation and guarantee the maximum safety and robustness even in the most demanding conditions.

#### ELECTRICAL CHARACTERISTICS

ELECTRICAL CHARACTERISTICS		- Caractéristiques fonctionnelles	
Organe de coupure	Interrupteur-sectionneur rotatif	Versions	Depuis le coffret
Courant nominal (A)	63	Nb mod. EN 50022	5
Nombre de pôles	4P	Plage de réglage	114 - 177 mm
Courant en AC21A (415V)	63	Type	Pour coupure d'urgence
Courant en AC22A (415V)	63	Couleur poignée	Rouge
Courant en AC23A (415V)	63	Verrouillable	OUI (3 cadenas maxi. sur OFF)
Puissance dissipée par pôle	2,58 W/pôle	<b>ACCESSOIRES</b>	-
Section des câbles	2,5-25 mm <sup>2</sup>	Type d'accessoire	Max. 2 contacts auxiliaires (1 par côté)

#### DIMENSIONS

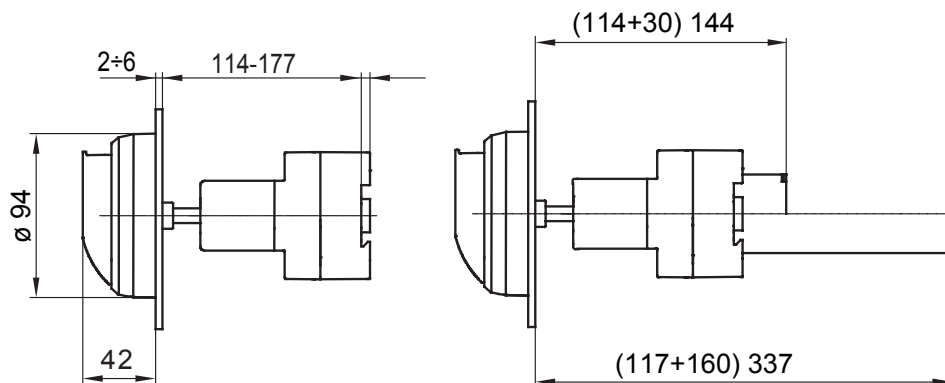

#### NORMES ET HOMOLOGATIONS

