





| | |
|---|----------------------------------|
| Description | RESIDUAL CURRENT CIRCUIT BREAKER |
| Code | SD |
| No. of poles | 4P |
| No. modules | 4 |
| Rated current | 100 A |
| Rated residual operating current | 300 mA |
| Type | A[S] |
| Rated voltage (EN/IEC 61008-1, 61008-2-1) | 400/415 V |

| | | | |
|---------------------------|----------------------------------|--|--------------------------------|
| Standard | IEC/EN 61008-1, IEC/EN 61008-2-1 | Rated frequency (Hz) | 50 Hz |
| Insulation voltage (Ui) | 400 V | Rated impulse withstand voltage (Uimp) | 4 kV |
| Overvoltage category | III | Level of immunity (8/20 μs) | 3000 A |
| Section rigid cable | Max 35 mm ² | Section flexible cable | Max 35 mm ² |
| Rated tightening torque | 2 Nm | Double connection | YES (up stream and down stram) |
| Operating temperature | -25 +40 °C | Stocking temperature | -35 +60 °C |
| Electrical endurance | ≥ 4.000 | Mechanical endurance | ≥ 10.000 |
| Auxiliaries compatibility | No | ReStart compatibility | No |
| Assembly position | Any | | |

DIMENSIONAL

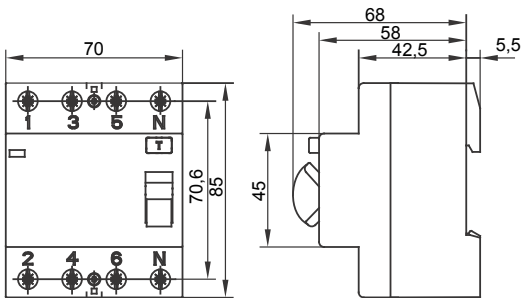

WIRING DIAGRAM

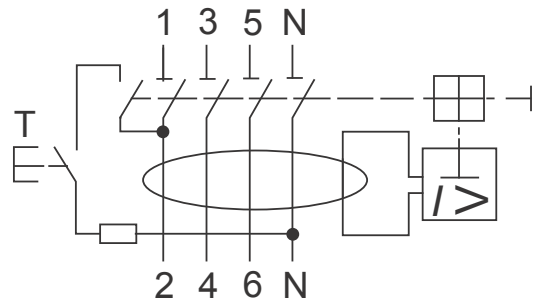

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09
Company subject to the management and
coordination of Polifin S.p.A.

www.gewiss.com
sat@gewiss.com
Last update 12/06/2026

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice