




Description Automatic reclosing device  
 Code ReStart Rm PRO 2P  
 Suitable for RCBO's MDC - 1P+N/2P - 30 mA  
 Rated voltage AC 230 V  
 Rated current 6 - 10 - 13 - 16 - 20 -25 - 32 A  
 No. modules 1  
 Standard IEC EN 63024  
 Rated frequency (Hz) 50 - 60 Hz

|                                                         |                                                      |                                                                   |                    |
|---------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------|--------------------|
| Distribution system                                     | TT - TN-S                                            | Rated non-operating resistance between live parts and earth (Rdo) | 8 kΩ               |
| Insulation voltage (Ui)                                 | 500 V                                                | Rated operating resistance between live parts and earth (Rd)      | 16 kΩ              |
| Rated impulse withstand voltage (Uimp)                  | 4 kV                                                 | Maximum operating frequency                                       | 30 oper./h         |
| Overvoltage category                                    | III                                                  | Mechanical endurance                                              | 4000               |
| Dielectric strength test voltage between pole and earth | 2500 V ac for 1 minute                               | Type of residual current protection                               | AC - A - A[IR] - F |
| Rated residual operating current                        | 30 mA                                                | Operating temperature                                             | -5 +60 °C          |
| Stocking temperature                                    | -40°C ÷ +70°C                                        | Automatic reclosure for untimely tripping                         | Yes                |
| Earth failure test                                      | Yes                                                  | Continuous system monitoring                                      | Yes                |
| Completeable with                                       | GWD0951 Auxiliary contact - GW90992 RS485 BUS Module | Number of poles                                                   | 2P                 |
| Electrocod                                              | 1414                                                 |                                                                   |                    |

## DIMENSIONAL

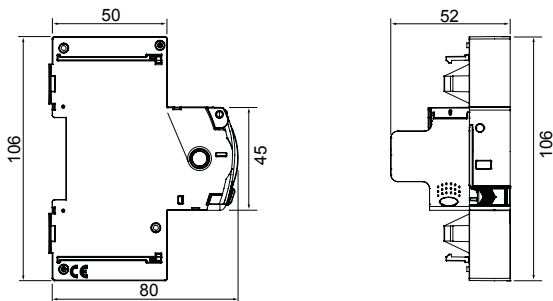

## STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
 24069 Cenate Sotto - Bergamo - Italy  
 tel. +39 035 94 61 11 fax +39 035 94 69 09  
 Company subject to the management and  
 coordination of Polifin S.p.A.

www.gewiss.com  
 sat@gewiss.com  
 Last update 11/09/2026

Data, measures, designs and pictures are shown  
 only as informative purposes,  
 and could be changed without previous notice