




The IP40 protected decorative enclosures are available in sizes from 8 to 72M. They provide superior aesthetic integration. They are available with smoked transparent doors or with blank doors that can be equipped with safety lock, characterized by the "PUSH" opening and closing. They can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

| | | | |
|------------------------------------|--|--------------------------------------|--|
| Isolatie-klasse | II (conform de norm IEC 61140) | Kleur | Wit RAL 9016 |
| Buitenafm. LxHxD (mm) | 280x225x100 | IP-graad | IP40 |
| Vermogen-verspreiding (W) | 22 | Stootbestendigheid | IK08 |
| Nominale spanning | 400 V | Deur kleur | Transparant fumé |
| Aantal modules EN 50022 | 12 | Nominale stroom | 125 A |
| Gloedraadproef | 650 °C | Bedrijfstemperatuur | -25 +60 °C |
| Type materiaal | Halogeenvrij conform EN 60754-2 | Electrocod | 0321 |
| Thermospanning met kogel | 70 °C | Accessoires voor isolatieherstelling | Schroef doppen (GW44623) of bevestigingsbeugels uit hars (GW44621) |
| Standaard | EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49 | Isolatie-spanning | 750 V |
| Max. installeerbare klemmenblokken | 1 x 12 modules | | |



DIMENSIONAL

TECHNICAL SYMBOLOGY

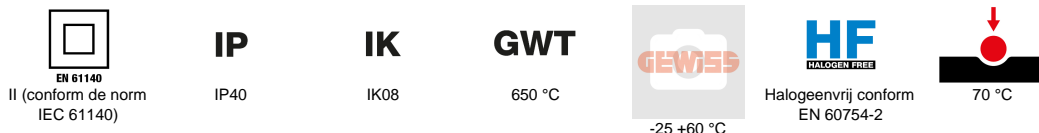

STANDARDS/APPROVALS

