

# Product Data Sheet

## GW40884

40 CDi-serie




The range of IP40 protected flush mounting enclosures offers sizes from 2 to 72 modules, available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application). They can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

Isolatie-klasse	II (conform de norm IEC 61140)	Kleur	Wit RAL 9016
Buitenafm. LxHxD (mm)	240x195x85	IP-graad	IP40
Installatie	Voor bakstenen muur	Vermogen-verspreiding (W)	20
Stootbestendigheid	IK08	Nominale spanning	400 V
Deur kleur	Blind	Aantal modules	8
Nominale stroom	125 A	Gloeidraadproof	650 °C
Bedrijfstemperatuur	-15 ÷ +60°C	Type materiaal	Halogeenvrij conform EN 60754-2
Electrocod	0311	Thermospanning met kogel	70 °C
Standaard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Isolatie-spanning	750 V
Max. installeerbare klemmenblokken	1 x 8 modules		




### DIMENSIONAL

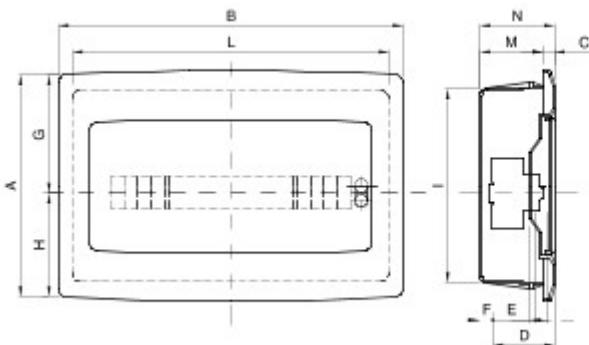

		A	B	C	N	D	E	F	G	H	I	L	M
8M	GW 40 604	193	240	12	97	75	48	16	105	90	162	200	85
	GW 40 884												
12M	GW 40 605	270	330	16	101	75	48	17	118	122	230	290	85
	GW 40 885												
8M	GW 40 608	310	465	16	101	75	48	17	165	145	280	427	85
	GW 40 888												

### TECHNICAL SYMBOLOGY




IP  
IP40

IK  
IK08

GWT  
650 °C



HF  
HALOGEN FREE  
Halogeenvrij conform EN 60754-2



### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 24/04/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice