





Range 44 CE - Surface-mounting watertight junction boxes in compliance with ANSI/UL 50 and made in high-performance technopolymers. The range includes IP56 with smooth walls, plain, screw (GWT 960°C).

Isolatie-klasse	II (conform de norm IEC 61140)		Kleur	Grijs RAL 7035
IP-graad	IP56	Materiaal	Technopolymeer GWPLAST 75	
Stootbestendigheid	IK08	Binnenafm. LxHxD (mm)	150x110x70	
Max. Ø gaten mogelijk	29 mm	Dekselschroeven (aantal en type)	4 - roestvrij staal	
Toepassing	Speciale toepassingen	Gloeidraadproof	960 °C	
Deksel	Laag geschroefd	Bedrijfstemperatuur	-25 +50 °C	
Electrocod	02211	Thermospanning met kogel	75 °C	
Aandraaimoment schroefbevestiging	1.2 Newton/Meter	Wanden	Egale	
Accessoires voor isolatieherstelling	GW44622			

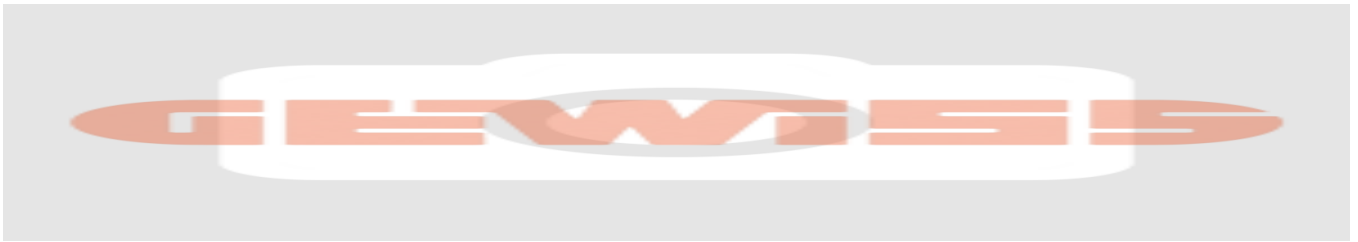

DIMENSIONAL

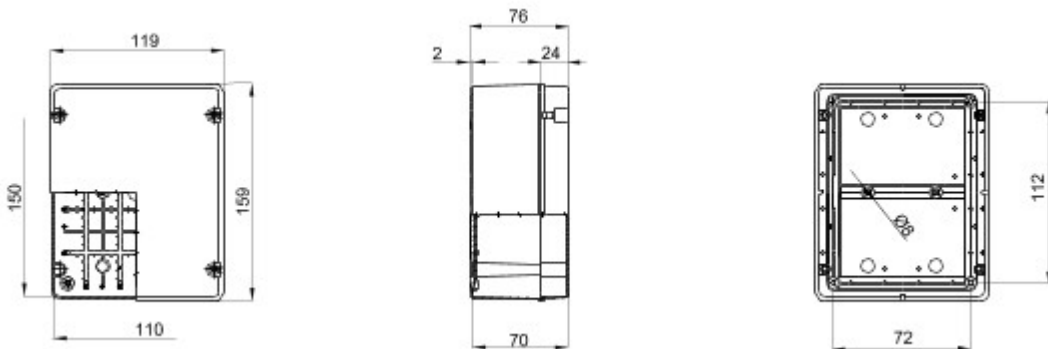

TECHNICAL SYMBOLOGY

	IP	IK	GWT		
II (conform de norm IEC 61140)	IP56	IK08	960 °C	-25 +50 °C	75 °C

STANDARDS/APPROVALS

