


Gloeidraadproef	650 °C	IP- graad	IP67
Stoot- bestendigheid	IK08	Electrocod	2222
Residentiële IB-contactdozen	N. 1 IEC 309 16-32 A IP44/67 + N.1 16 A MAX 3P+E of GW274		

### DIMENSIONAL

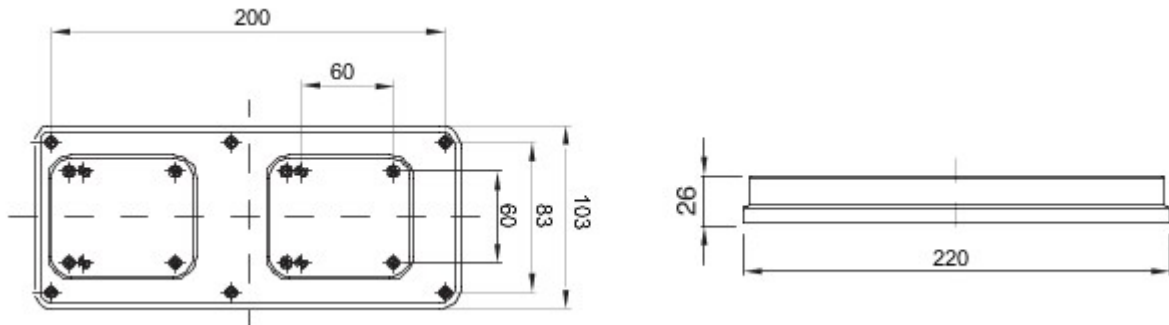

### TECHNICAL SYMBOLOGY

**GWT**    **IP**    **IK**

650 °C

IP67

IK08

### STANDARDS/APPROVALS

