




The system of medium rigid protective conduits made of high quality PVC to offer superior performance. Available in diameters from 16 to 32 mm and in lengths from 2 to 3 m. They can be integrated with flexible conduits and junction boxes. Completing the offer, a wide range of couplings and routing components with IP40 and IP67 degree of protection.

Kleur	Grijs RAL 7035	Materiaal	PVC
Lengte (m)	2	Ø leidingen (mm)	20
Gloedraadproef	960 °C	Bestendigheid tegen druk	3 (gemiddeld - 750 N)
Bestendigheid tegen impacten	3 (gemiddeld - 2 J)	Classificering	3321

### DIMENSIONAL

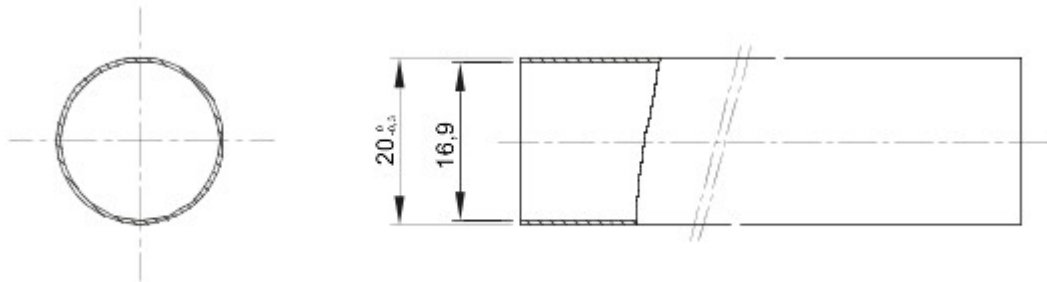

### TECHNICAL SYMBOLOGY

**GWT**

960 °C



### STANDARDS/APPROVALS

