




The system of medium rigid protective conduits made of high quality PVC to offer superior performance. Available in diameters from 16 to 32 mm and in lengths from 2 to 3 m. They can be integrated with flexible conduits and junction boxes. Completing the offer, a wide range of couplings and routing components with IP40 and IP67 degree of protection.

Kleur	Grijs RAL 7035	Materiaal	PVC
Lengte (m)	2	Ø leidingen (mm)	25
Gloedraadproef	960 °C	Bestendigheid tegen druk	3 (gemiddeld - 750 N)
Bestendigheid tegen impacten	3 (gemiddeld - 2 J)	Classificering	3321

DIMENSIONAL

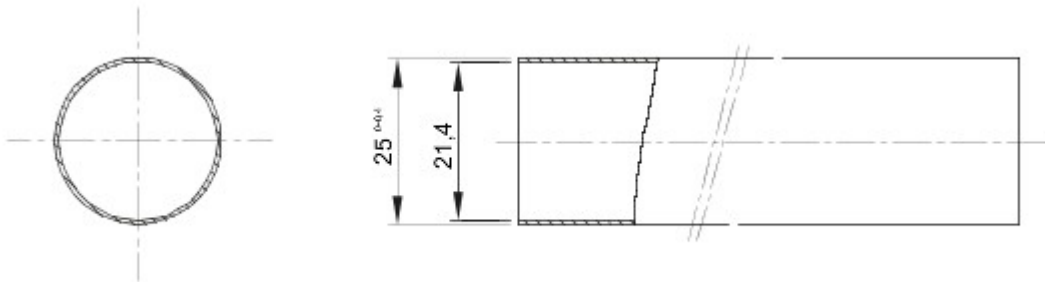

TECHNICAL SYMBOLOGY

GWT

960 °C



STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 23/04/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice