

# Product Data Sheet

## GW40605BS

40 CDi-serie




The IP40 protected flush mounting enclosures are available in sizes from 8 to 72M and are equipped with screw multipolar terminal blocks, 80 A IP 20. They are available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application); the terminal blocks allow to create simple and neat wiring reducing the set-up time of the enclosure.

Isolatie-klasse	II (conform de norm IEC 61140)		Kleur	Wit RAL 9016
Buitenafm. LxHxD (mm)	330x270x85	IP-graad	IP40	
Installatie	Voor bakstenen muur	Vermogen-verspreiding (W)	36	
Stootbestendigheid	IK08	Nominale spanning	400 V	
Deur kleur	Transparant fumé	Klemmenblokken	80 A - IP20 tweepolige gaten met schroeven	
Aantal modules EN 50022	12	Nominale stroom	125 A	
Gloeidraadproef	650 °C	Bedrijfstemperatuur	-15 ÷ +60°C	
Type materiaal	Halogeenvrij conform EN 60754-2	Electrocod	0311	
Thermospanning met kogel	70 °C	Standaard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	
Isolatie-spanning	750 V	Pool 1 (mm <sup>2</sup> )	N/E (3x16) + (11x10)	
Pool 2 (mm <sup>2</sup> )	N/E (3x16) + (11x10)			




### DIMENSIONAL

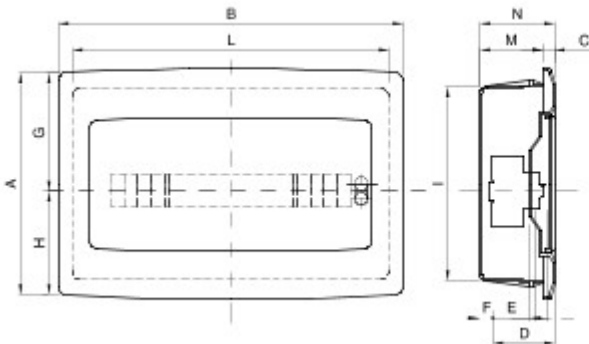

		A	B	C	N	D	E	F	G	H	I	L	M
8M	GW 40 604 GW 40 884	193	240	12	97	75	48	14	105	90	162	200	85
12M	GW 40 605 GW 40 885	270	330	16	101	75	48	17	118	122	230	290	85
18M	GW 40 608 GW 40 888	310	465	16	101	75	48	17	165	145	280	427	85

### TECHNICAL SYMBOLOGY




IP  
IP40

IK  
IK08

GWT  
650 °C



HF  
Halogeenvrij conform EN 60754-2



### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 23/04/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice

