




The range of IP40 protected flush mounting enclosures offers sizes from 2 to 72 modules, available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application). They can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

| | | | | |
|------------------------------------|--|---------------------------|---------------------------------|--------------|
| Isolatie-klasse | II (conform de norm IEC 61140) | | Kleur | Wit RAL 9016 |
| Buitenafm. LxHxD (mm) | 330x270x85 | IP-graad | IP40 | |
| Installatie | Voor bakstenen muur | Vermogen-verspreiding (W) | 36 | |
| Stootbestendigheid | IK08 | Nominale spanning | 400 V | |
| Deur kleur | Blind | Aantal modules | 12 | |
| Nominale stroom | 125 A | Gloeidraadproof | 650 °C | |
| Bedrijfstemperatuur | -15 + +60°C | Type materiaal | Halogeenvrij conform EN 60754-2 | |
| Electrocod | 0311 | Thermospanning met kogel | 70 °C | |
| Standaard | EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49 | Isolatie-spanning | 750 V | |
| Max. installeerbare klemmenblokken | 1 x 12 modules | | | |



DIMENSIONAL

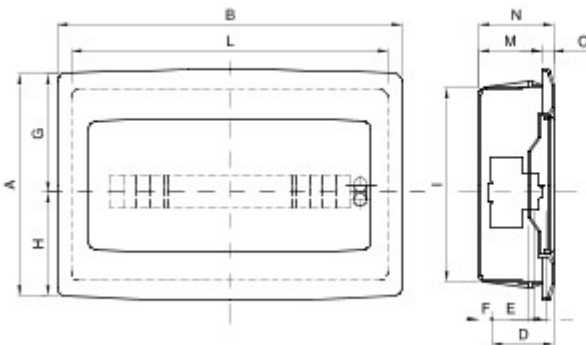

| | | A | B | C | N | D | E | F | G | H | I | L | M |
|-----|-----------|-----|-----|----|-----|----|----|----|-----|-----|-----|-----|----|
| 8M | GW 40 604 | 193 | 240 | 12 | 97 | 75 | 48 | 14 | 15 | 90 | 162 | 200 | 85 |
| | GW 40 884 | | | | | | | | | | | | |
| 12M | GW 40 605 | 270 | 330 | 16 | 101 | 75 | 48 | 17 | 148 | 122 | 230 | 290 | 85 |
| | GW 40 885 | | | | | | | | | | | | |
| 18M | GW 40 608 | 310 | 465 | 16 | 101 | 75 | 48 | 17 | 165 | 145 | 260 | 427 | 85 |
| | GW 40 888 | | | | | | | | | | | | |

TECHNICAL SYMBOLOGY



IP

IP40

IK

IK08


GWT

650 °C



HF

Halogeenvrij conform EN 60754-2



70 °C

STANDARDS/APPROVALS

