




Type 2 mobile connector, compliant with IEC 62196-1 and IEC 62196-2, designed for charging electric vehicles compliant with IEC 61851-1 regulations, equipped with an external textured coating on the lower portion to improve grip and facilitate insertion into the relative inlet. It is supplied pre-wired with a smooth 5/8 m cable or 4 m spiral cable. This product is also equipped with a rubber cable gland and has an IP55 protection rating if inserted in its protective insulating cover. Brand customisation options are available.

Handle colour	Black RAL 9004	IP- graad	IP55 (with sheath or cap)
Stoot- bestendigheid	IK10	Cable gland and plug colour	Black RAL 9004
Gloeidraadproef	850°C (active parts) / 650°C (external)	Aantal polen	L1 - N - PE - CC - CP
Nominale stroom	32 A	Opslagtemperatuur	-30°C ÷ +50 °C
Wiring section	2,5 mm <sup>2</sup>	Nominale frequentie (Hz)	50/60 Hz
Kabel- lengte	5 m	Cable colour	Zwart
Cable type	Smooth		

## DIMENSIONAL

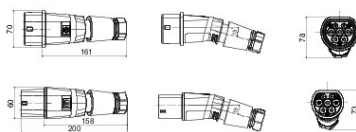

## TECHNICAL SYMBOLOGY

**IP**

**IK**

**GWT**

IP55 (with sheath or  
cap)

IK10

850°C (active parts) /  
650°C (external)

## STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 16/05/2024

Data, measures, designs and pictures are shown  
only as informative purposes,  
and could be changed without previous notice