




Type 2 mobile connector, compliant with IEC 62196-1 and IEC 62196-2, designed for charging electric vehicles compliant with IEC 61851-1 regulations, equipped with an external textured coating on the lower portion to improve grip and facilitate insertion into the relative inlet. It is supplied pre-wired with a smooth 5/8 m cable or 4 m spiral cable. This product is also equipped with a rubber cable gland and has an IP55 protection rating if inserted in its protective insulating cover. Brand customisation options are available.

Handle colour	Black RAL 9004	IP- graad	IP55 (with sheath or cap)
Stoot- bestendigheid	IK10	Cable gland and plug colour	Black RAL 9004
Gloeidraadproof	850°C (active parts) / 650°C (external)	Aantal polen	L1/L2/L3 - N- PE - CC - CP
Nominale stroom	32 A	Opslagtemperatuur	-30°C ÷ +50 °C
Wiring section	6 mm ²	Nominale frequentie (Hz)	50/60 Hz
Kabel- lengte	4 m	Cable colour	Zwart
Cable type	Spiralled		

DIMENSIONAL

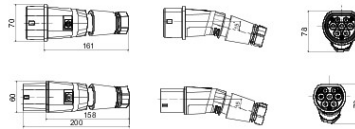

TECHNICAL SYMBOLOGY

IP **IK** **GWT**

IP55 (with sheath or cap)

IK10

850°C (active parts) /
650°C (external)

STANDARDS/APPROVALS

