


ELIA AL




ELIA AL is a flush-mounting LED device for accent lighting in commercial areas and offices, composed of a white powder-coated die-cast aluminium frame and 2 different optics (36° and 60°) that guarantee a UGR of less than 19. The range is available in two sizes, with a colour temperature of 3,000K (warm white) or 4,000K (neutral white), a colour rendering index of more than 80 or more than 90 and the option of an electronic power supply with On/Off or DALI command. This modular flush-mounting solution features a rotosymmetrical optic equipped with a passive heat removal system, in die-cast aluminium. Installation is quick and easy, thanks to the reduced weight of the device, the bayonet coupling and the simple wiring, with the connector located on the device and remote power supply included.

GENERAL INFORMATION		OPTIC AND ILLUMINATING FEATURES	
Context	Interior lighting	Optiek	60°
Luminaire	LED luminaire for accentuation	Unified Glare Rating	UGR<19
Toepassing	Intern	Lumen- vermogen (lm)	1800
Unique digital code (Datamatrix)	Currently not present	Efficacy (lm/W)	100
Kleur	Wit	Kleur temperatuur	3000 K
Type lichtbron	LED	Colour Rendering Index	CRI 90
System vermogen	18 W	Standard Deviation Colour Matching	SDCM = 3
LED Lifetime	L80B50 (Tq25°) = 50.000h	Photobiological Risk Class	RG0
Gewicht (kg)	0.5	Standaard	EN 60598-1; EN 60598-2-2; IEC/TR 62778; EN 62493
Garantie	5 jaar	ELETRICAL AND LIGHTING FEATURES	
Opslagtemperatuur	-20° +65°	Voedings- spanning	220-240 V
Operating temperature	-20° +45°	Nominale frequentie (Hz)	50 / 60
MATERIALS		- Driver	External - Included
Body	Gietaluminium	- Driver failure rate	F025 (Tq=25°C) = 50.000 h
Type plaat	-	- Overvoltage protection	DM 0,5 kV
Optic	High-efficiency reflector	- Control System	ON / OFF
Gasket	-	INSTALLATION AND MAINTENANCE	
Locking Hook	-	- Mounting and installation	Voor inbouw-
External screw	-	- Tilt	-
Colour	Powder coating	- Wiring	With connection terminal on driver
STANDARDS AND APPROVALS		- Bevestiging	Via springs integrated with the luminaire
Classificering	-	- Light souce replaceability	Non-replaceable
Toestel met verlaagde oppervlaktetemperatuur	-	- Controlgear replaceability	By professional
DIN 18032-3-certificering	-	- Driver Box	-
IPEA	-	- Maximum surface exposed to the wind	-
Isolatie- klasse	II	-	-
IP- graad	IP40 - IP54	-	-
Stoot- bestendigheid	IK06	-	-
Glow Wire Test	850 °C	-	-

DIMENSIONAL

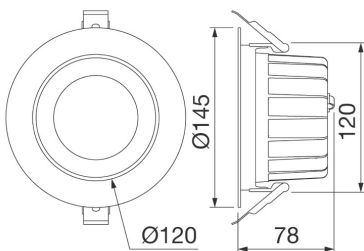

PHOTOMETRIC DISTRIBUTION



ELIA AL

TECHNICAL SYMBOLOGY



IP
IP40 - IP54

IK
IK06

GWT
850 °C

STANDARDS/APPROVALS

**UK
CA**

