


ELIA AL




ELIA AL is a flush-mounting LED device for accent lighting in commercial areas and offices, composed of a white powder-coated die-cast aluminium frame and 2 different optics (36° and 60°) that guarantee a UGR of less than 19. The range is available in two sizes, with a colour temperature of 3,000K (warm white) or 4,000K (neutral white), a colour rendering index of more than 80 or more than 90 and the option of an electronic power supply with On/Off or DALI command. This modular flush-mounting solution features a rotosymmetrical optic equipped with a passive heat removal system, in die-cast aluminium. Installation is quick and easy, thanks to the reduced weight of the device, the bayonet coupling and the simple wiring, with the connector located on the device and remote power supply included.

GENERAL INFORMATION		OPTIC AND ILLUMINATING FEATURES		
Context	Interior lighting	Optiek	60°	
Luminaire	LED luminaire for accentuation	Unified Glare Rating	UGR<19	
Toepassing	Intern	Lumen- vermogen (lm)	2000	
Unique digital code (Datamatrix)	Currently not present	Efficacy (lm/W)	111	
Kleur	Wit	Kleur temperatuur	3000 K	
Type lichtbron	LED	Colour Rendering Index	CRI 80	
System vermogen	18 W	Standard Deviation Colour Matching	SDCM = 3	
LED Lifetime	L80B50 (Tq25°) = 50.000h	Photobiological Risk Class	RG0	
Gewicht (kg)	0.5	Standaard	EN 60598-1; EN 60598-2-2; IEC/TR 62778; EN 62493	
Garantie	5 jaar	ELETRICAL AND LIGHTING FEATURES		
Opslagtemperatuur	-20° +65°	Voedings- spanning	220-240 V	
Operating temperature	-20° +45°	Nominale frequentie (Hz)	50 / 60	
MATERIALS		-	External - Included	
Body	Gietaluminium	Driver	F025 (Tq=25°C) = 50.000 h	
Type plaat	-	Driver failure rate	DM 0,5 kV	
Optic	High-efficiency reflector	Overvoltage protection	DALI	
Gasket	-	Control System	INSTALLATION AND MAINTENANCE	
Locking Hook	-	Control System	-	
External screw	-	Mounting and installation	Voor inbouw-	
Colour	Powder coating	Tilt	-	
STANDARDS AND APPROVALS		Wiring	With connection terminal on driver	
Classificering	-	Bevestiging	Via springs integrated with the luminaire	
Toestel met verlaagde oppervlaktetemperatuur	-	Light souce replaceability	Non-replaceable	
DIN 18032-3-certificering	-	Controlgear replaceability	By professional	
IPEA	-	Driver Box	-	
Isolatie- klasse	II	Maximum surface exposed to the wind	-	
IP- graad	IP40 - IP54	-	-	
Stoot- bestendigheid	IK06	-	-	
Glow Wire Test	850 °C	-	-	

DIMENSIONAL

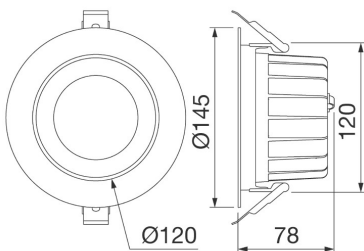

PHOTOMETRIC DISTRIBUTION



ELIA AL

TECHNICAL SYMBOLOGY



IP

IP40 - IP54

IK

IK06

GWT

850 °C

STANDARDS/APPROVALS

**UK
CA**

