



ELIA CL




GENERAL INFORMATION		OPTIC AND ILLUMINATING FEATURES	
Context	Interior lighting	Optiek	Wide opal
Luminaire	LED luminaire for diffuse light with built-in emergency kit	Unified Glare Rating	-
Toepassing	Intern	Lumen-vermogen (lm)	2600
Unique digital code (Datamatrix)	Currently not present	Efficacy (lm/W)	104
Kleur	Wit	Kleur temperatuur	4000 K
Type lichtbron	LED	Colour Rendering Index	CRI 80
System vermogen	25 W	Standard Deviation Colour Matching	SDCM = 3
LED Lifetime	L80B50 (Tq25°) = 50.000h	Photobiological Risk Class	RG0
Gewicht (kg)	0.8	Standaard	EN 60598-1; EN 60598-2-1; IEC/TR 62778; EN 62493
Garantie	3 jaar	ELETRICAL AND LIGHTING FEATURES	
Opslagtemperatuur	-20° +65°	Voedings-spanning	220-240 V
Operating temperature	-0° +45°	Nominale frequentie (Hz)	50 / 60
MATERIALS		Driver	Ingebouwd
Body	Polycarbonate	Driver failure rate	F025 (Tq=25°C) = 50.000 h
Type plaat	Polycarbonate	Overvoltage protection	DM 1 kV
Optic	Opalescent polycarbonate diffuser	Control System	Nood
Gasket	-	INSTALLATION AND MAINTENANCE	
Locking Hook	-	Mounting and installation	Ceiling - Wall
External screw	-	Tilt	-
Colour	Polycarbonate coloured in paste	Wiring	With integrated terminal
STANDARDS AND APPROVALS		Bevestiging	Via integrated rear steel bracket
Classificering	-	Light souce replaceability	Non-replaceable
Toestel met verlaagde oppervlaktetemperatuur	-	Controlgear replaceability	Non-replaceable
DIN 18032-3-certificering	-	Driver Box	Ingebouwd
IPEA	-	Maximum surface exposed to the wind	-
Isolatie-klasse	II	-	-
IP-graad	IP20 - IP54	-	-
Stootbestendigheid	IK08	-	-
Glow Wire Test	750 °C	-	-

DIMENSIONAL

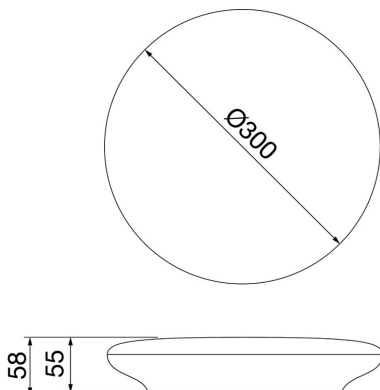

PHOTOMETRIC DISTRIBUTION



ELIA CL

TECHNICAL SYMBOLOGY



IP
IP20 - IP54

IK
IK08

GWT
750 °C

STANDARDS/APPROVALS

