





ELIA CL is an LED device made from white polycarbonate designed for ceiling or surface mounting, ideal for lighting stairways, bathrooms/rest rooms and service areas. It is quick and easy to install, and features clean, minimalist lines. Designed in two different sizes and power versions, it features a polycarbonate opal diffusing shell, a colour temperature of 4,000 K (neutral white) and a colour rendering index of more than 80. ELIA CL is also available in the Sensor version, with movement detection up to 8m, a radius of up to 120° and duration of 30 seconds, and in the Emergency version, the luminous flux is guaranteed for 3 hours of operation at 10%. It has been designed to withstand temperature variations from -20°C to +45°C, and offers protection from water and dust penetration of up to level IP54 and from shocks and impacts of up to level IK08. Light and easy to handle, ELIA CL is easy to install thanks to the steel bracket on the back of the device for wall mounting, the quick-coupling terminal on the rear of the device for the electrical wiring and the bayonet locking mechanism for attaching the body of the light.

GENERAL INFORMATION		OPTIC AND ILLUMINATING FEATURES	
Context	Interior lighting	Optiek	Wide opal
Luminaire	LED luminaire for diffuse light with motion sensor	Unified Glare Rating	-
Toepassing	Intern	Lumen-vermogen (lm)	2600
Unique digital code (Datamatrix)	Currently not present	Efficacy (lm/W)	104
Kleur	Wit	Kleur temperatuur	4000 K
Type lichtbron	LED	Colour Rendering Index	CRI 80
System vermogen	25 W	Standard Deviation Colour Matching	SDCM = 3
LED Lifetime	L80B50 (Tq25°) = 50.000h	Photobiological Risk Class	RG0
Gewicht (kg)	0.8	Standaard	EN 60598-1; EN 60598-2-1; IEC/TR 62778; EN 62493
Garantie	5 jaar	ELETRICAL AND LIGHTING FEATURES	
Opslagtemperatuur	-20° +65°	Voedings-spanning	220-240 V
Operating temperature	-20° +45°	Nominale frequentie (Hz)	50 / 60
MATERIALS		Driver	Ingebouwd
Body	Polycarbonate	Driver failure rate	F025 (Tq=25°C) = 50.000 h
Type plaat	Polycarbonate	Overvoltage protection	DM 1 kV
Optic	Opalescent polycarbonate diffuser	Control System	Sensor
Gasket	-	INSTALLATION AND MAINTENANCE	
Locking Hook	-	Mounting and installation	Ceiling - Wall
External screw	-	Tilt	-
Colour	Polycarbonate coloured in paste	Wiring	With integrated terminal
STANDARDS AND APPROVALS		Bevestiging	Via integrated rear steel bracket
Classificering	-	Light source replaceability	Non-replaceable
Toestel met verlaagde oppervlaktetemperatuur	-	Controlgear replaceability	Non-replaceable
DIN 18032-3-certificering	-	Driver Box	Ingebouwd
IPEA	-	Maximum surface exposed to the wind	-
Isolatie-klasse	II		-
IP-graad	IP20 - IP54		-
Stoot-bestendigheid	IK08		-
Glow Wire Test	750 °C		-

DIMENSIONAL

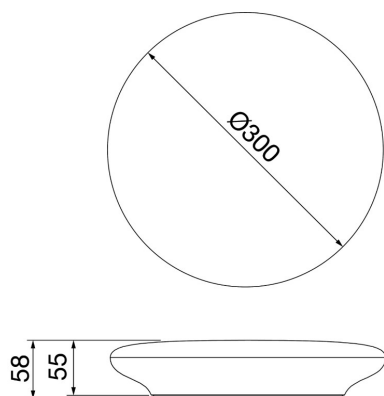

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP

IK

GWT



IP
IP20 - IP54

IK
IK08

GWT
750 °C

STANDARDS/APPROVALS

**UK
CA**



Data, measures, designs and pictures are for information purpose only, last update 13/05/2024. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website www.gewiss.com. Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>.