

ELIA PL Backlit



ELIA PL Backlit is a modular recessed LED luminaire for indoor lighting applications. Thanks to its superior energy efficiency, it is the ideal solution for a fast return on investment in the replacement of traditional lighting systems. Available in 3 different sizes (300 x 1200 mm, 600 x 600 mm and 620 x 620 mm), it is suitable for flush-mounting in modular ceilings and can alternatively be ceiling or suspension-mounted using dedicated accessories (to be ordered separately). The range allows for great flexibility with its multiple possible combinations of colour temperatures and control systems: it can be ordered in 3,000 K (warm white) or 4,000 K (neutral white), both with a colour rendering index (CRI) of 80; and with an On/Off or DALI external power supply (included with the product). The luminaire is equipped with an opal diffuser with UGR lower than 22, and it is easy to install thanks to its reduced weight and its quick coupling connector for fast electrical wiring.

GENERAL INFORMATION

Context	Interior lighting
Luminaire	Modular LED luminaire
Toepassing	Intern
Unique digital code (Datamatrix)	Currently not present
Kleur	Wit
Type lichtbron	LED
System vermogen	25 W
LED Lifetime	L80B50 (Tq25°) = 50.000h
Gewicht (kg)	1.76
Garantie	5 jaar
Opslagtemperatuur	-20° +65°
Operating temperature	-20° +45°

OPTIC AND ILLUMINATING FEATURES

Optiek	Wide opal
Unified Glare Rating	UGR < 22
Lumen-vermogen (lm)	3300
Efficacy (lm/W)	132
Kleur temperatuur	4000 K
Colour Rendering Index	CRI 80
Standard Deviation Colour Matching	SDCM = 3
Photobiological Risk Class	RG0
Standaard	EN 60598-1; EN 60598-2-2; IEC/TR 62778; EN 62493

ELETRICAL AND LIGHTING FEATURES

Voedings-spanning	220-240 V
Nominale frequentie (Hz)	50/60 Hz
Driver	External - Included
Driver failure rate	F025 (Tq=25°C) = 50.000 h
Overvoltage protection	DM 1 kV
Control System	ON / OFF

MATERIALS

Body	Cold rolled steel
Type plaat	Polystyrene
Optic	High-diffusion opalescent diffuser
Gasket	-
Locking Hook	-

INSTALLATION AND MAINTENANCE


Mounting and installation	Recessed (ceiling-mounted and hanging require separately ordered accessories)
Tilt	With suspension adjustment Kit
Wiring	With connection terminal on driver
Bevestiging	Free-standing or via separately ordered accessories

STANDARDS AND APPROVALS

Classificering	-	Light source replaceability	Non-replaceable
Toestel met verlaagde oppervlaktetemperatuur	-	Controlgear replaceability	By professional
DIN 18032-3-certificering	-	Driver Box	-
IPEA	-	Maximum surface exposed to the wind	-
Isolatie-klasse	II		-
IP-graad	IP40		-
Stoot-bestendigheid	IK03		-
Glow Wire Test	650 °C		-

DIMENSIONAL

PHOTOMETRIC DISTRIBUTION

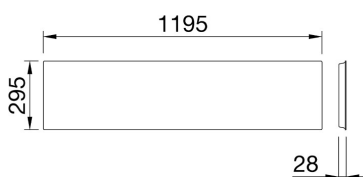



ELIA PL Backlit

TECHNICAL SYMBOLOGY



IP
IP40

IK
IK03

GWT
650 °C

STANDARDS/APPROVALS

