


ESALITE HB Industriële toestellen




Industrial LED lighting fixture made of die-cast EN AB 46100 aluminum with polyester powder coating. Correct lighting is provided by an optical system composed of different versions of lenses. Silicone gaskets, breathing and anti-condensation device in Goretex, waterproof connector for 1.5 mm² cables and stainless steel external screws. Integrated suspension fixing system thanks to a ring made directly in the die-cast aluminum. The die-cast aluminum structure guarantees optimal performance conditions both @ Ta25 ° and @ Ta50 ° thanks to specific thermal sizing tests. The correct heat dispersion inside ESALITE is guaranteed by the special passive heat sink with a very low copper content that offers high qualitative and quantitative performances.

| | | | |
|--|-------------------|--|--|
| Uitvoeringen | 3000 K warm licht | Gewicht (kg) | 11.2 |
| Optiek | Gemiddeld 60° | System vermogen | 210 W |
| Lumen-vermogen (lm) | 22400 | Kleur temperatuur | 3000 K (CRI>80) |
| Nominale stroom (lm) | 27000 | Toepassing | Intern |
| Stootbestendigheid | IK07 | Bedrijfstemperatuur | -30°C + +50 °C |
| Kleur | Grey RAL 9006 | Lamp-LED stroom | Led - niet vervangbaar 0.9 A |
| Type driver | Driver Led Dali | IP-graad | IP65 |
| Serie | Esalite HB - 24K | Spanning | 220-240 V - 50/60 Hz |
| Isolatie-klasse | I | Garantie | 5 jaar |
| Efficiëntieklasse van geïntegreerde leds | A + A++ | Overvoltage resistance | Common mode: 8KV; Differential mode: 6KV |
| Life time L90B10 (Tq 25°) | 100000 h | Type plaat | High transparency PMMA |
| Life time L90B10 (Tq 50°) | 44000 h | Toestel met verlaagde oppervlaktetemperatuur | - |
| Type lichtbron | LED | Electrocod | 2444 |
| DIN 18032-3-certificering | Nee | Controlgear replaceability | By professional |
| Light source replaceability | Non-replaceable | | |

DIMENSIONAL

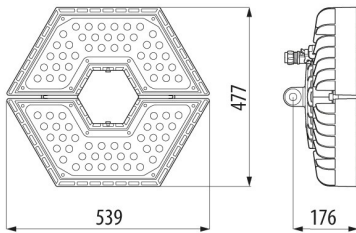

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IK

IP

IK07

IP65



STANDARDS/APPROVALS

