


### ESALITE HB Industriële toestellen




Industrial LED lighting fixture made of die-cast EN AB 46100 aluminum with polyester powder coating. Correct lighting is provided by an optical system composed of different versions of lenses. Silicone gaskets, breathing and anti-condensation device in Goretex, waterproof connector for 1.5 mm<sup>2</sup> cables and stainless steel external screws. Integrated suspension fixing system thanks to a ring made directly in the die-cast aluminum. The die-cast aluminum structure guarantees optimal performance conditions both @ Ta25 ° and @ Ta50 ° thanks to specific thermal sizing tests. The correct heat dispersion inside ESALITE is guaranteed by the special passive heat sink with a very low copper content that offers high qualitative and quantitative performances.

Uitvoeringen	5700 K koud licht	Gewicht (kg)	11.2
Optiek	Wide 90°	System vermogen	210 W
Lumen-vermogen (lm)	25600	Kleur temperatuur	5700 K (CRI>80)
Nominale stroom (lm)	29000	Toepassing	Intern
Stootbestendigheid	IK07	Bedrijfstemperatuur	-30°C + +50 °C
Kleur	Grey RAL 9006	Lamp-Led	Led - niet vervangbaar
Type driver	Driver Led Dali	LED stroom	0.9 A
Serie	Esalite HB - 24K	IP-graad	IP65
Isolatie-klasse	I	Spanning	220-240 V - 50/60 Hz
Efficiëntieklasse van geïntegreerde leds	A + A++	Garantie	5 jaar
Life time L90B10 (Tq 25°)	100000 h	Overvoltage resistance	Common mode: 8KV; Differential mode: 6KV
Life time L90B10 (Tq 50°)	44000 h	Type plaat	High transparency PMMA
Type lichtbron	LED	Toestel met verlaagde oppervlaktetemperatuur	-
DIN 18032-3-certificering	Nee	Electrocod	2444
Light source replaceability	Non-replaceable	Controlgear replaceability	By professional

### DIMENSIONAL

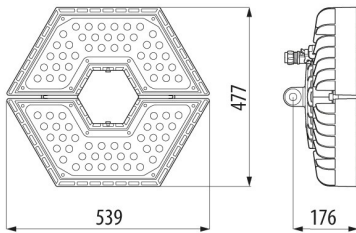

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



IK

IP



IK07

IP65

### STANDARDS/APPROVALS

UK  
CA

