


EXTRO serie




Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Toepassing	Binnenshuis / buitenshuis	Uitvoering	Nood
Spanning	220-240 V - 50/60 Hz	Isolatie-klasse	I
Kleur	Grafietgrijs	IP-graad	IP55
Stootbestendigheid	IK09	Gloeidraadproof	850 °C
Minimale afstand van het verlichte voorwerp	1 m	Bedrijfstemperatuur	-25 +25 °C
Efficiëntieklasse van compatibele lampen	A	Lampvermogen	26-32 W
Type driver	EVG elektronische reactor	Lamphouder	GX24q-3
Lamp-accumulator type	FSM Nikkel-cadmium	Autonomie	1 h
Gewicht (kg)	2.8	Lichtstroom in noodgevallen [lm]	135 / 90
		Electrocod	2415

DIMENSIONAL

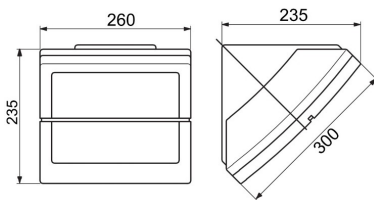

PHOTOMETRIC DISTRIBUTION

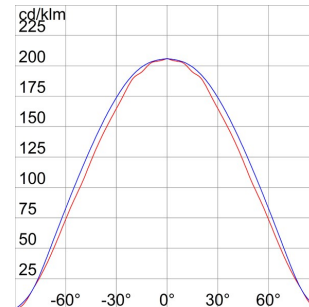

TECHNICAL SYMBOLOGY



IP
IP55

IK
IK09

GWT
850 °C



STANDARDS/APPROVALS

