



### EXTRO serie

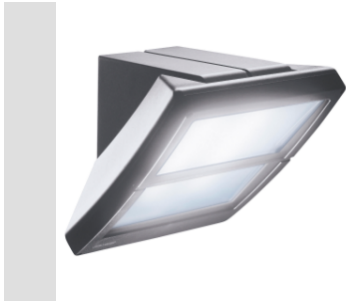


Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Toepassing	Binnenshuis / buitenshuis	Uitvoering	LED
Spanning	220/240 V - 50/60 Hz - Standalone	Isolatie-klasse	I
Kleur	Grafietgrijs	IP-graad	IP55
Stootbestendigheid	IK09	Gloeidraadproof	850 °C
Minimale afstand van het verlichte voorwerp	1 m	Bedrijfstemperatuur	-25 +25 °C
Lamphouder	LED	Nominale stroom (Im)	2400
Lamp-	LED	System vermogen	26 W
Kleurtemperatuur	4000 K (CRI 90)	Lumenvermogen (lm)	1950
Efficiëntieklasse van geïntegreerde leds	A + A++	Type lichtbron	Led - niet vervangbaar
Gewicht (kg)	2.4	Garantie	Kan worden uitgebreid
Electrocod	2424	Ledlevensduur (L70B50)	50000 h

### DIMENSIONAL

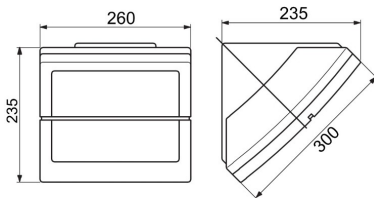

### PHOTOMETRIC DISTRIBUTION

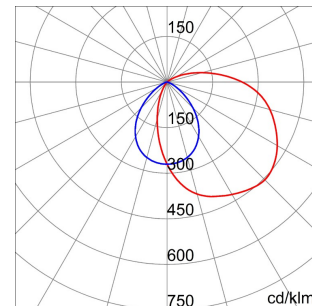

### TECHNICAL SYMBOLOGY



IP  
IP55

IK  
IK09

GWT  
850 °C



### STANDARDS/APPROVALS

