


EXTRO serie




Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Toepassing	Binnenshuis / buitenshuis	Uitvoering	LED
Spanning	220/240 V - 50/60 Hz - Standalone	Isolatie-klasse	I
Kleur	BlueGreen	IP-graad	IP55
Stootbestendigheid	IK09	Gloeidraadproof	850 °C
Minimale afstand van het verlichte voorwerp	1 m	Bedrijfstemperatuur	-25 +25 °C
Nominale stroom (Im)	2200	Lamp-	LED
System vermogen	26 W	Kleur temperatuur	3000 K (CRI>80)
Lumen-vermogen (lm)	1900	Efficiëntieklasse van geïntegreerde leds	A ÷ A++
Type lichtbron	Led - niet vervangbaar	Gewicht (kg)	2.4
Garantie	Kan worden uitgebreid	Electrocod	2424
Ledlevensduur (L70B50)	50000 h		

DIMENSIONAL

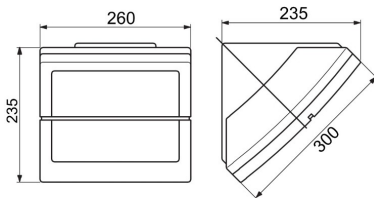

PHOTOMETRIC DISTRIBUTION

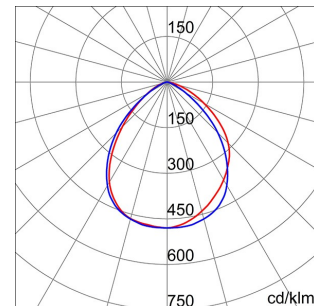

TECHNICAL SYMBOLOGY



IP
IP55

IK
IK09

GWT
850 °C



STANDARDS/APPROVALS

