



Smart [4] is a series of LED indoor appliances suitable for the lighting of industries and sports facilities. It is available in HE (High Efficiency), HLO (High Lumen Output) and integrated DALI Emergency. Three different sizes available: 1M, 2M and 4M. The body is made of "Halogen-free" nylon loaded with grey glass fibre (RAL7035) with vent and anti-condensation device, heat dissipation device in aluminium alloy EN AB 44300. It is equipped with a dual optical system that includes a metallic reflector with ARRAY optics and a metallic reflector with UV stabilized PMMA lenses, with high efficiency, which allow a wide variety of light distributions 30°, 60°, 90°, Asymmetric and Elliptical. The version with through wiring has pre-wired mechanical and electrical connection components. Suspension, wall and projection appliances can be installed. It is available with three types of Colour Temperature (3000K / 4000K / 5700K), Color Rendering Index CRI>80 and two power supply options (ON/OFF or DALI).

GENERAL INFORMATION

Context	Lighting for industries and large sports facilities
Luminaire	LED Industrial Reflector
Toepassing	Intern
Unique digital code (Datamatrix)	Datamatrix
Kleur	Grijs RAL 7035
Type lichtbron	LED
System vermogen	253 W
LED Lifetime	L90B10(Tq25°C)>150.000h; L90B10(Tq50°C)=100.000h
Gewicht (kg)	13.5
Garantie	5 jaar
Opslagtemperatuur	-40 +70 °C
Operating temperature	-30°C ÷ +50 °C

MATERIALS

Body	PA6 "Halogen Free" loaded fibreglass
Type plaat	Tempered glass Thickness 4mm
Optic	Metallic PC reflector and PMMA lenses
Gasket	anti-aging silicone
Locking Hook	-
External screw	Roestvrij staal
Colour	Grijs RAL 7035

STANDARDS AND APPROVALS

Classificering	-
Toestel met verlaagde oppervlaktetemperatuur	Ja
DIN 18032-3-certificering	With Bracket - Rope Kit + terminal (in approval)
IPEA	-
Isolatie-klasse	I
IP-graad	IP66
Stootbestendigheid	IK08
Glow Wire Test	850 °C

OPTIC AND ILLUMINATING FEATURES

Optiek	60°
Unified Glare Rating	UGR ≤ 22
Lumen-vermogen (lm)	39600
Efficacy (lm/W)	157
Kleurtemperatuur	4000 K
Colour Rendering Index	CRI>80
Standard Deviation Colour Matching	SDCM = 3
Photobiological Risk Class	RG0
Standaard	EN 60598-1 ; EN 60598-2-1 ; EN 60598-2-24

ELETRICAL AND LIGHTING FEATURES

Voedings-spanning	220 - 240 V
Nominale frequentie (Hz)	50/60 Hz
Driver	Included
Driver failure rate	F10 = 100.000h Tq25°C/50.000h Tq50°C
Overvoltage protection	DM 6 kV / CM 10 kV
Control System	1 x DALI DT6

INSTALLATION AND MAINTENANCE

Mounting and installation	Ceiling - Wallmounting - Suspension
Tilt	With bracket accessory
Wiring	With GW connect watertight connector
Bevestiging	-
Light source replaceability	By professional
Controlgear replaceability	By professional

Driver Box	Ingebouwd
------------	-----------

Maximum surface exposed to the wind	0,350 m²
-------------------------------------	----------

-	-
---	---

-	-
---	---


-	-
---	---

-	-
---	---


-	-
---	---

-	-
---	---

DIMENSIONAL

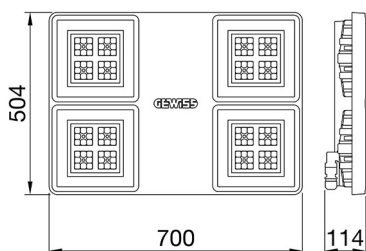

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY





0,350 m²



IP
IP66

IK
IK08

GWT
850 °C

STANDARDS/APPROVALS

**UK
CA**



Data, measures, designs and pictures are for information purpose only, last update 16/05/2024. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website www.gewiss.com. Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>.