



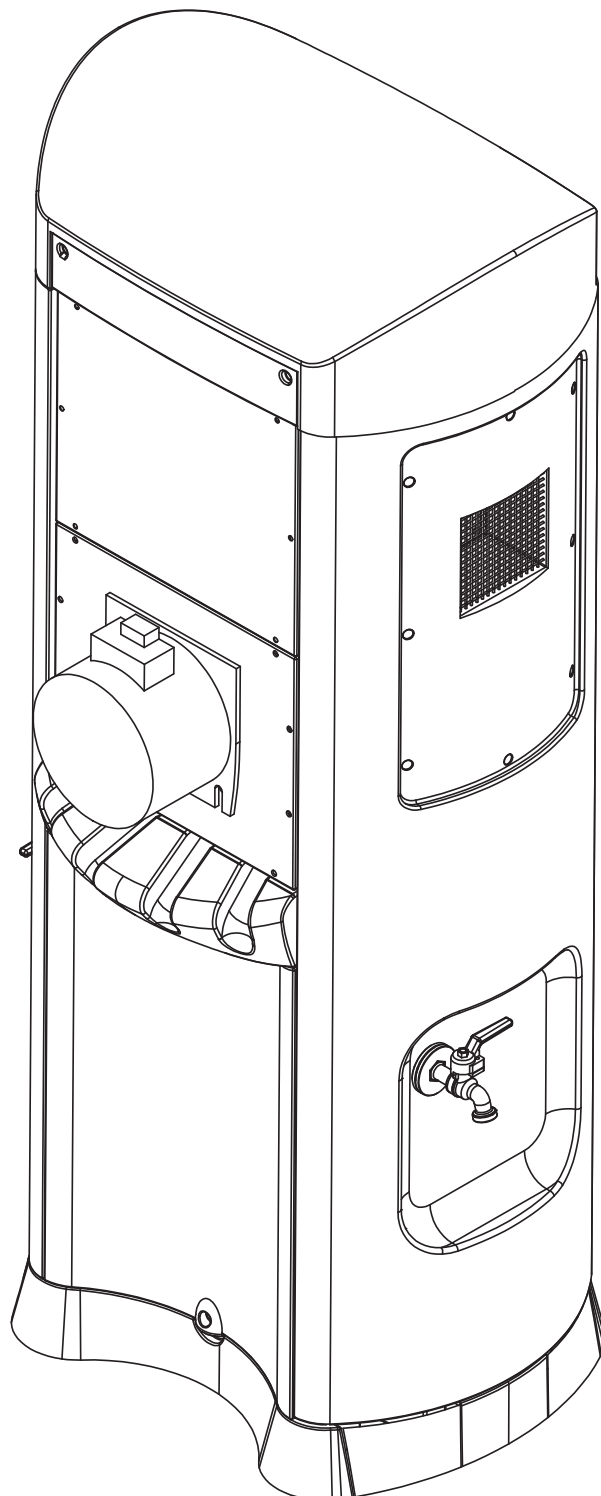
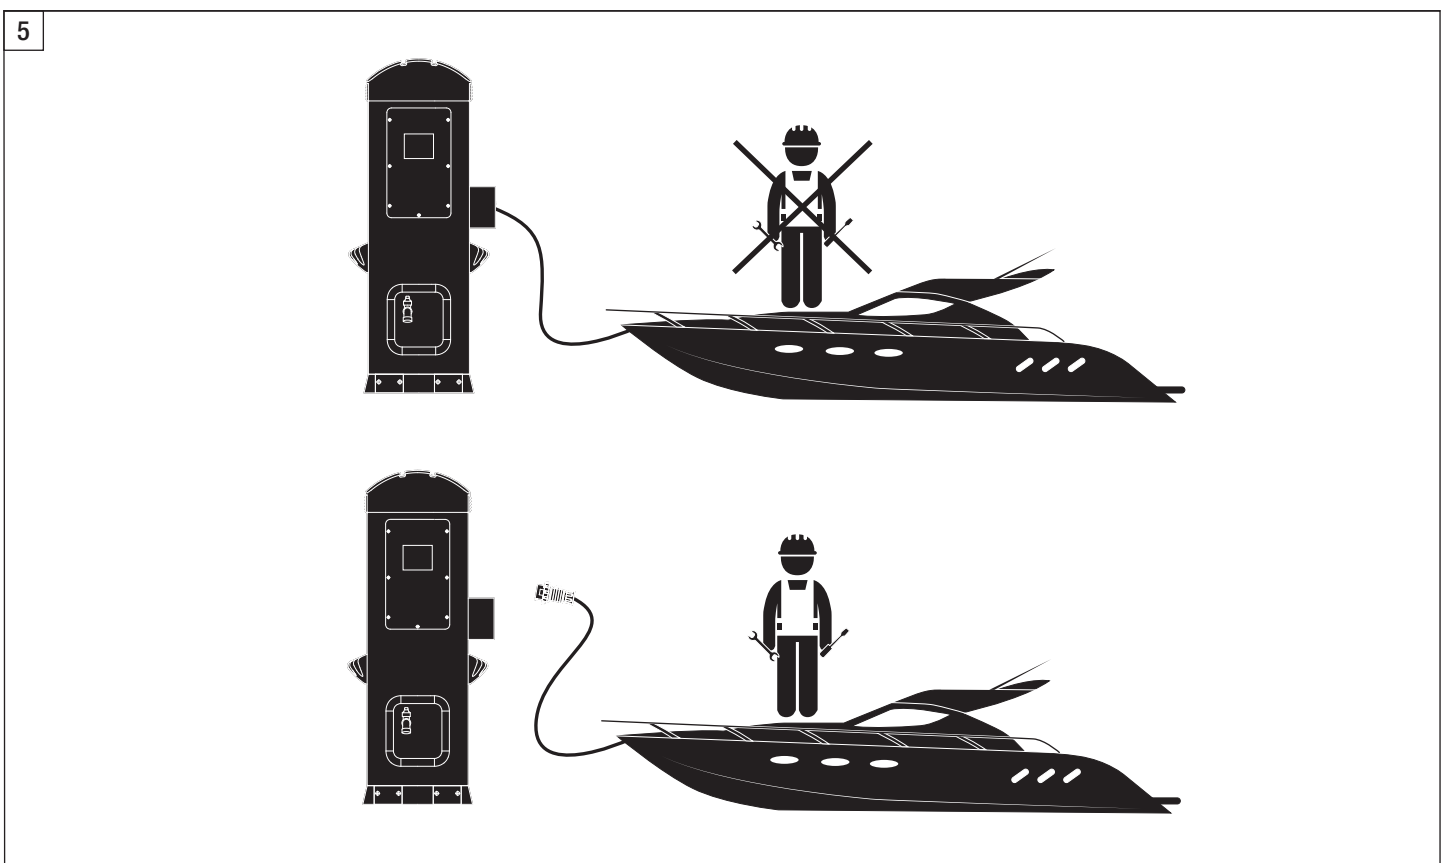
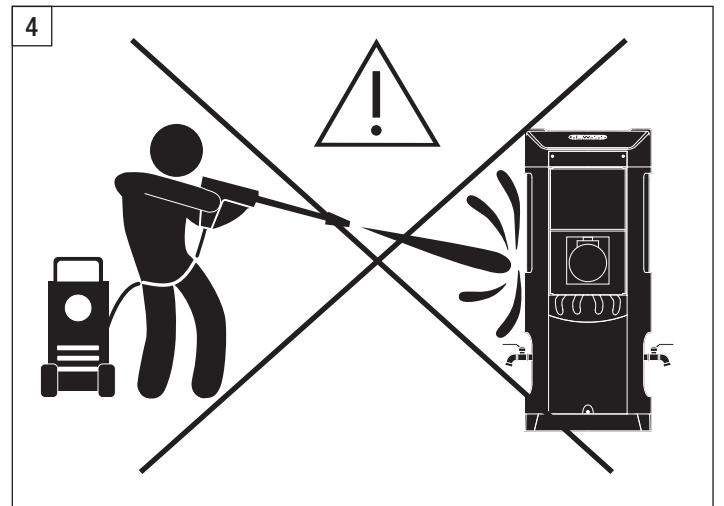
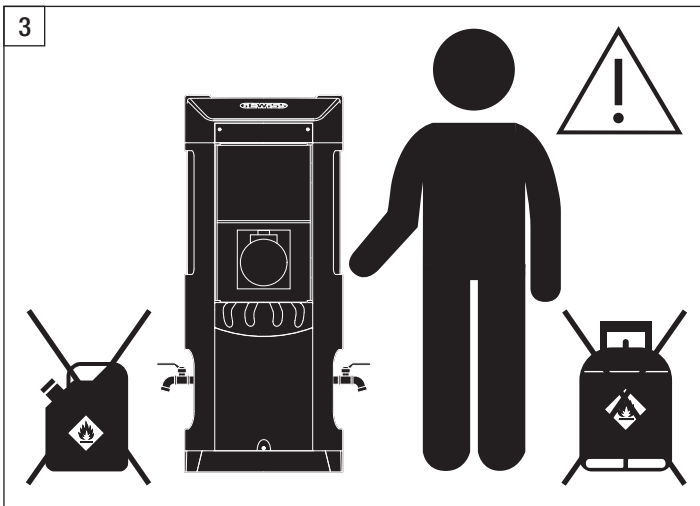
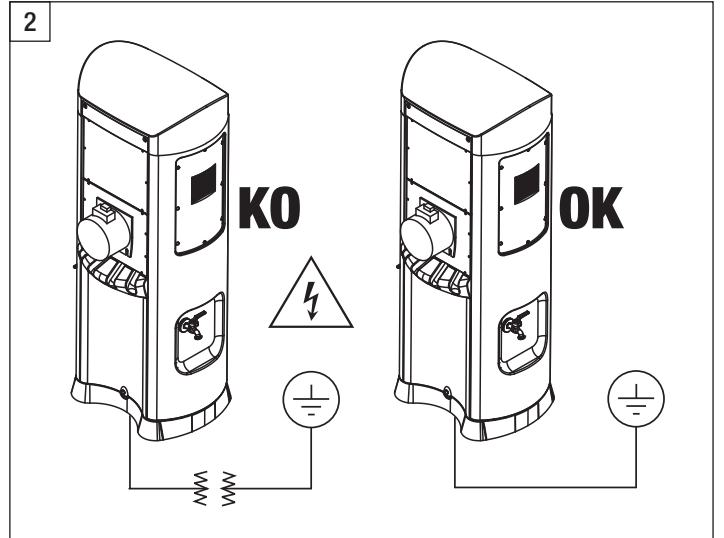
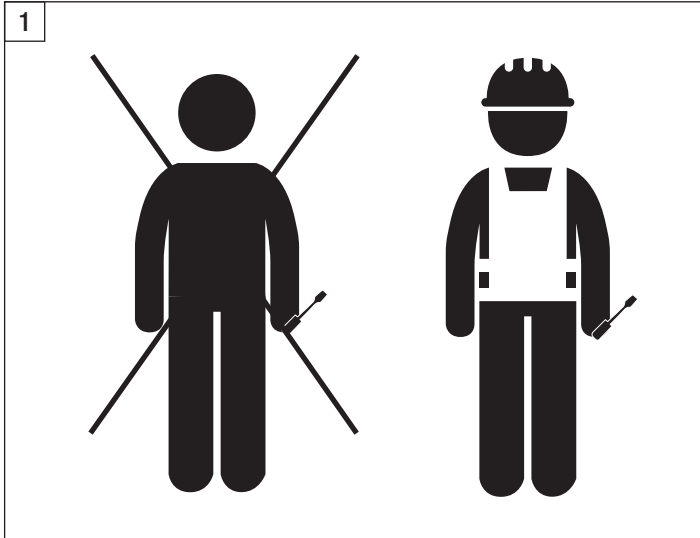

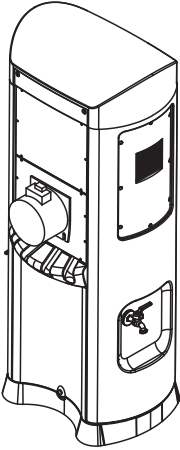











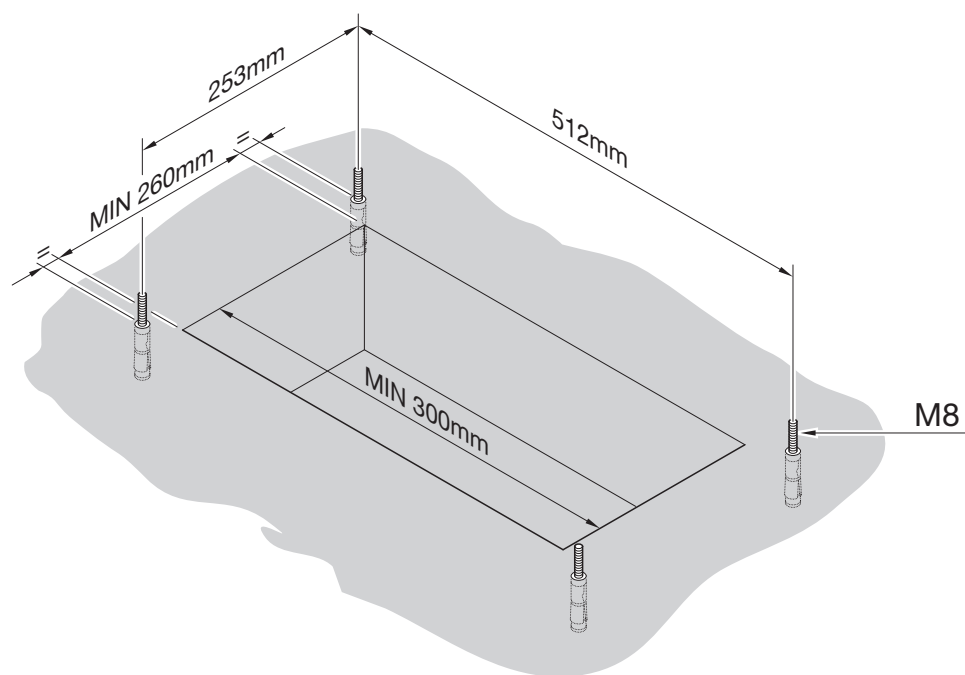



	CEI EN 60439 IP55 -5°C +65°C IK09-IK10 GWT(°C) 850° 650° 98%		R, S, T, N, PE 240mm ²
		 x 2	G 1/2
	11W G23 230V - 50Hz		2°C - 70° C 0.2 - 10 bar
	400V 50/60Hz		+/- 6VDC 10mA 0 - 10 bar

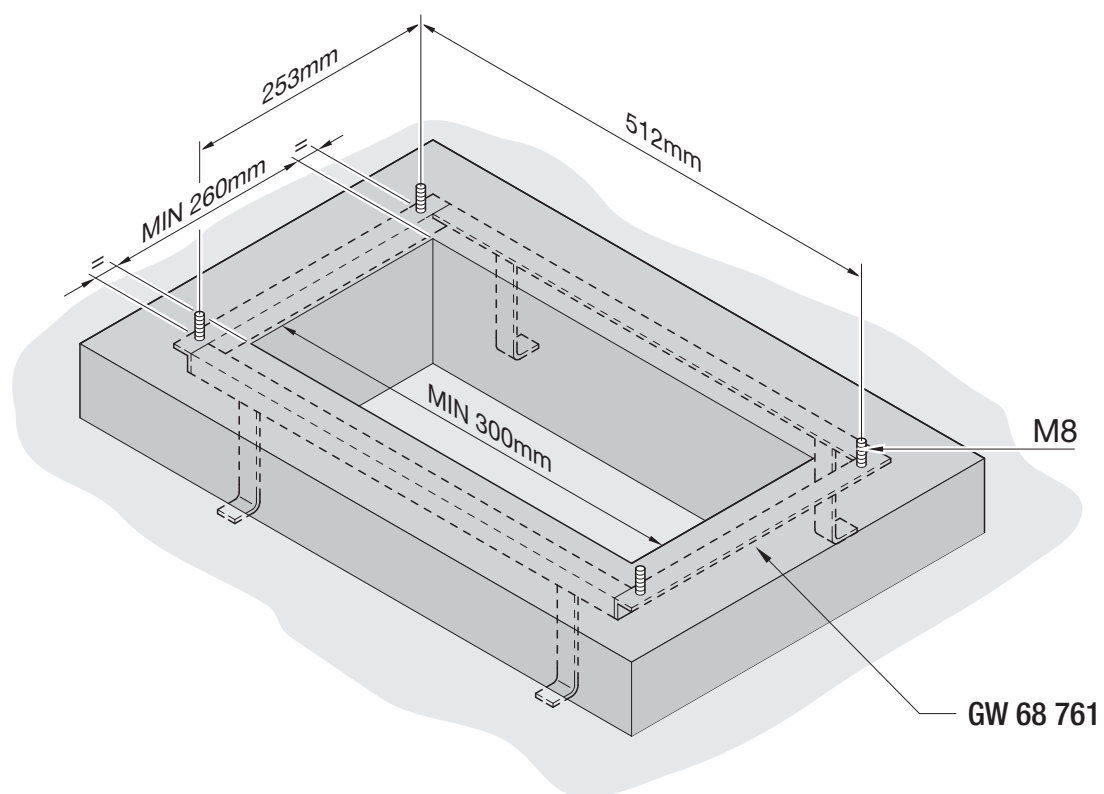


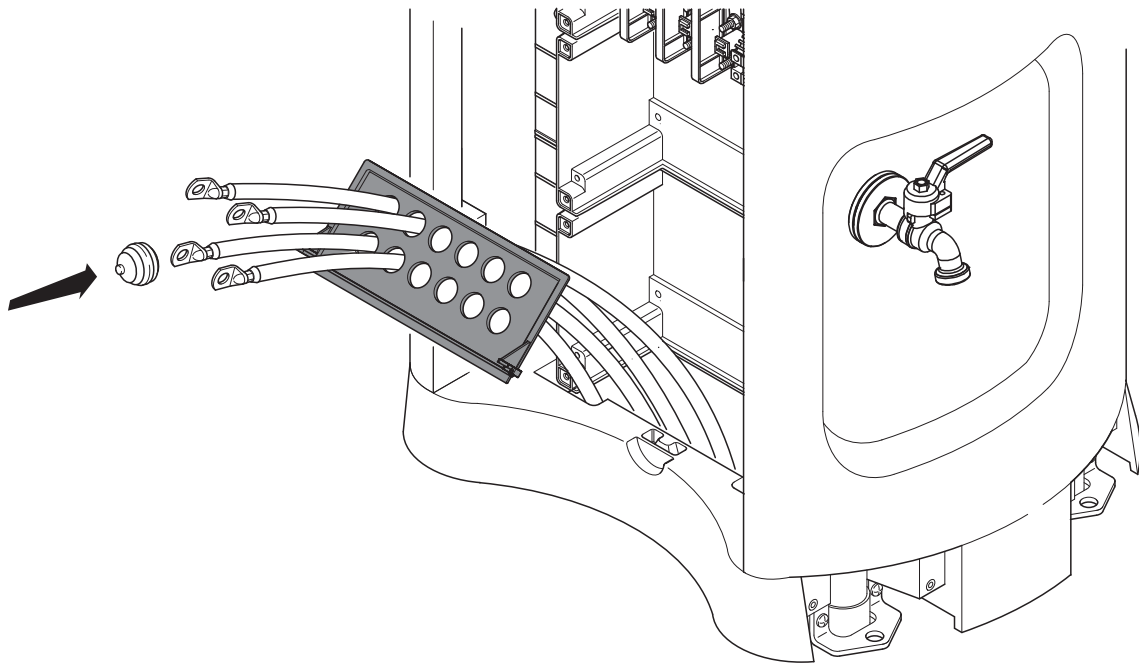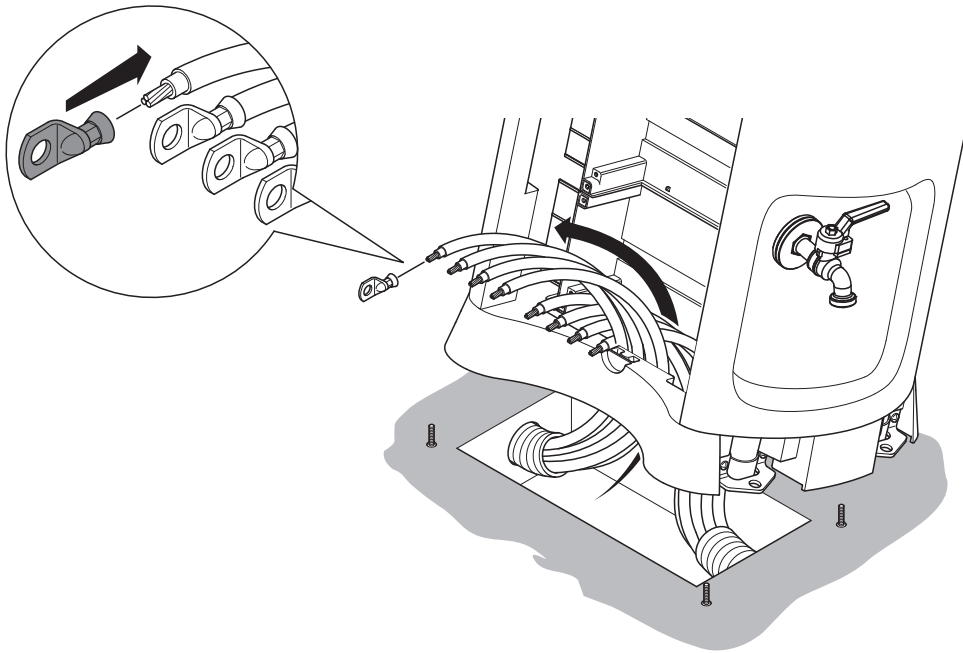


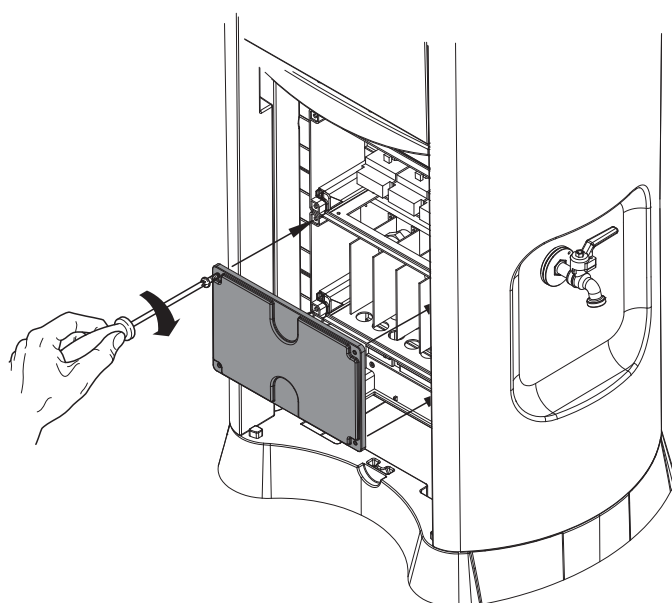
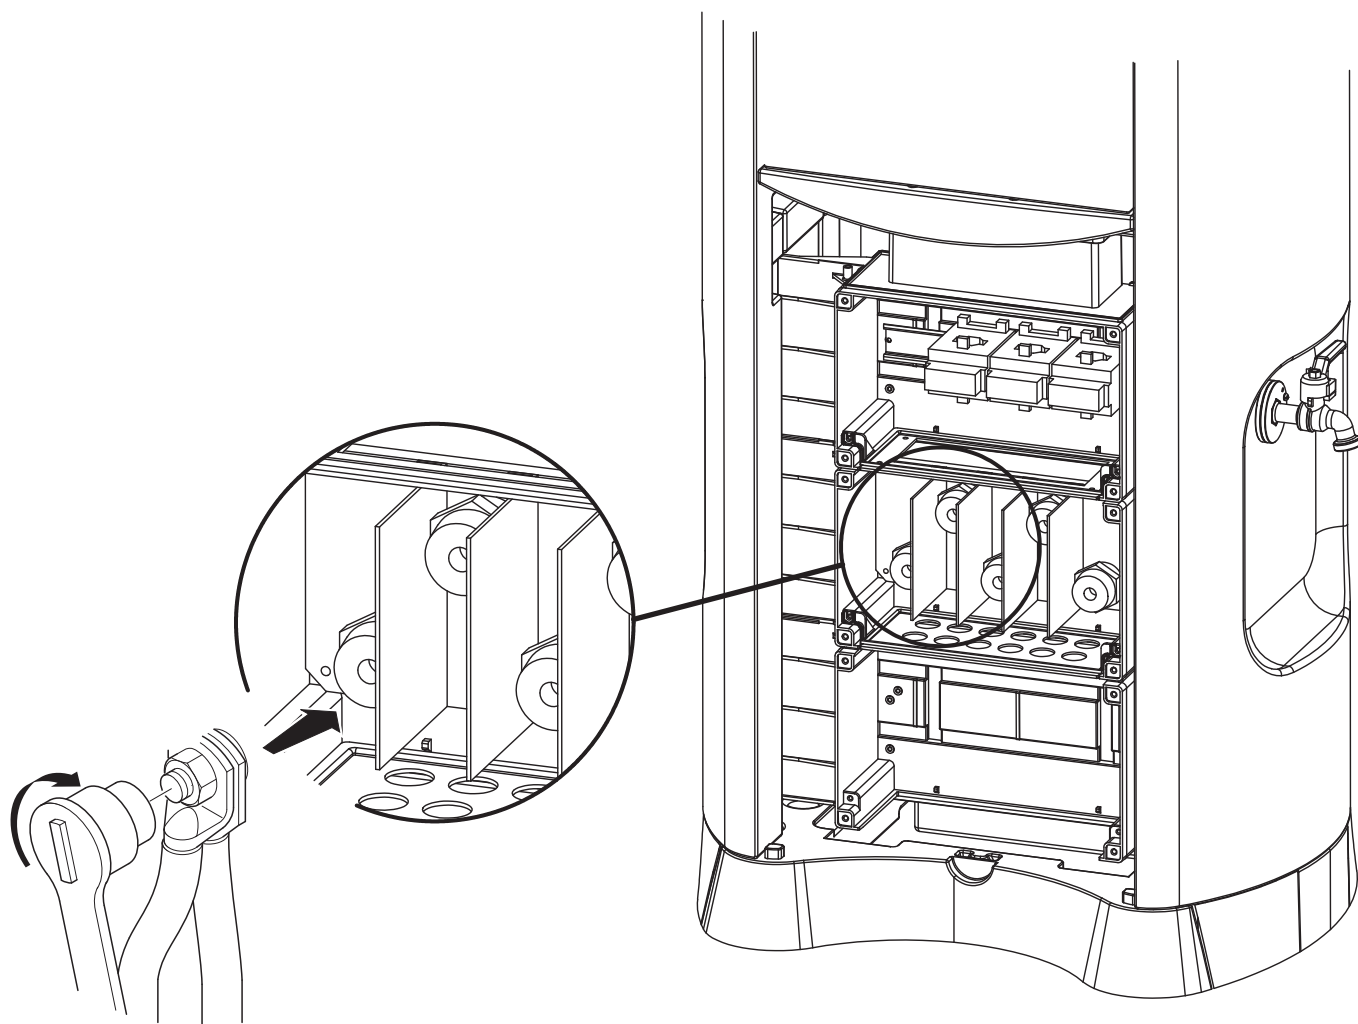


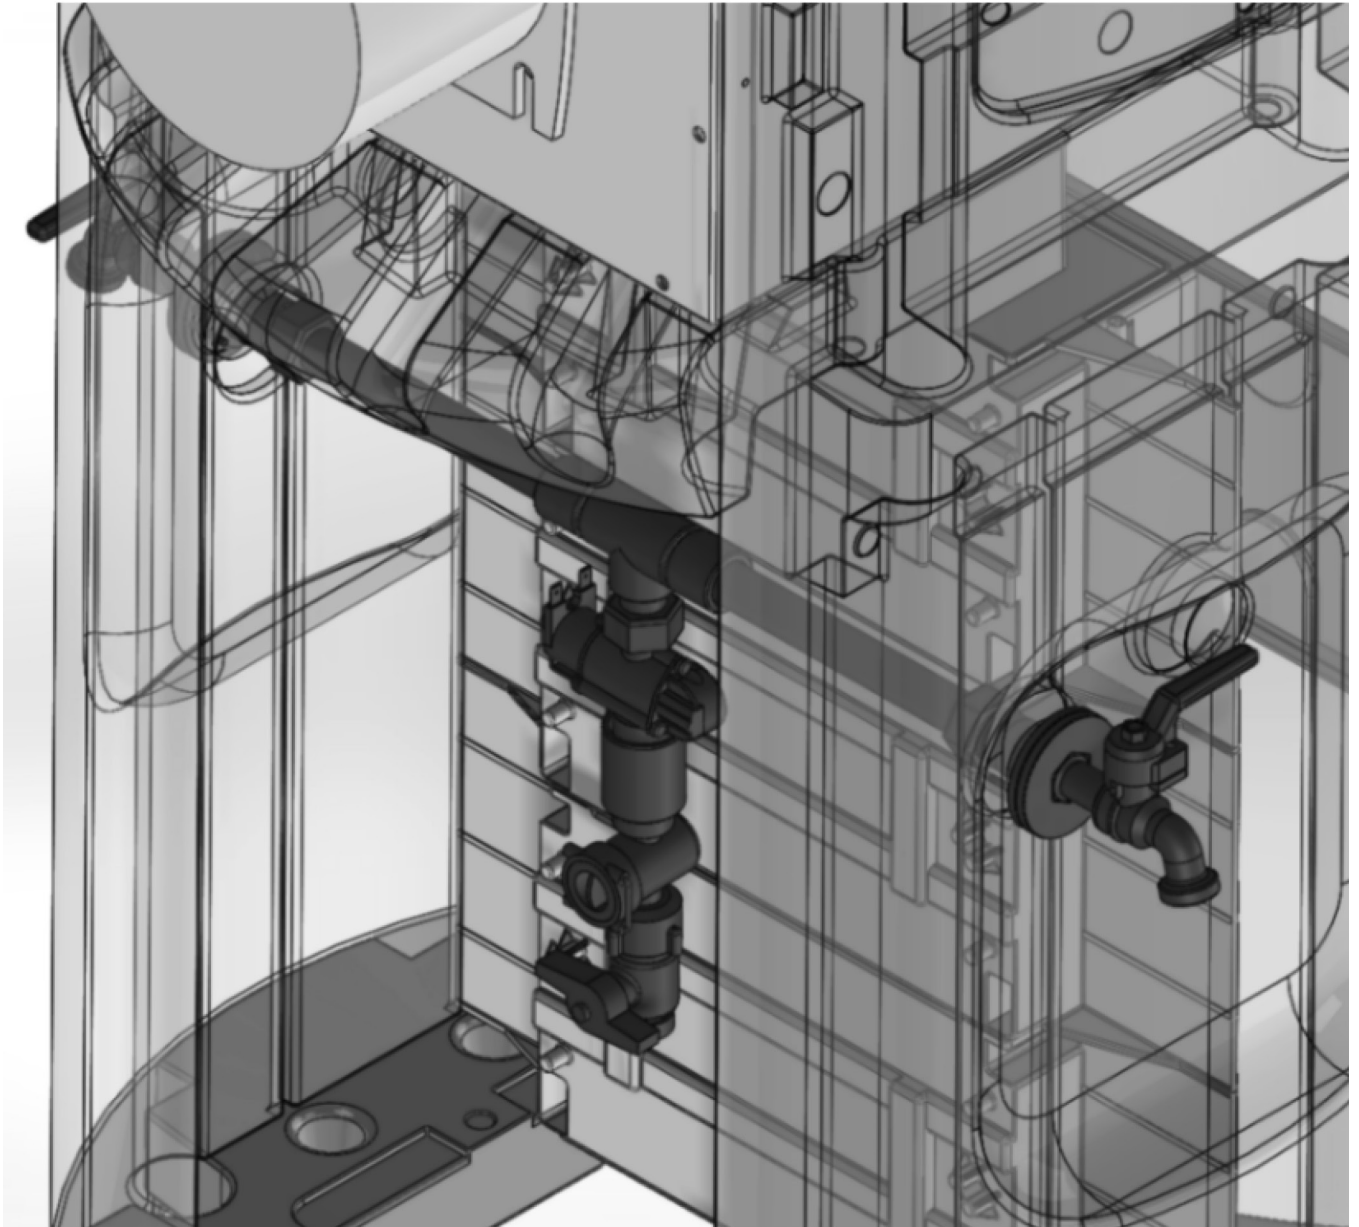






	0,22 mm ²	120Ω	RS485 ITC/CDT: 14S7Y
---	----------------------	------	----------------------

		
ITC/CDT		www.itc-indtecnicacavi.com
BELDEN	P/N 9841	www.belden.com
CEAM	CPR 6003	www.ceamcavi.it

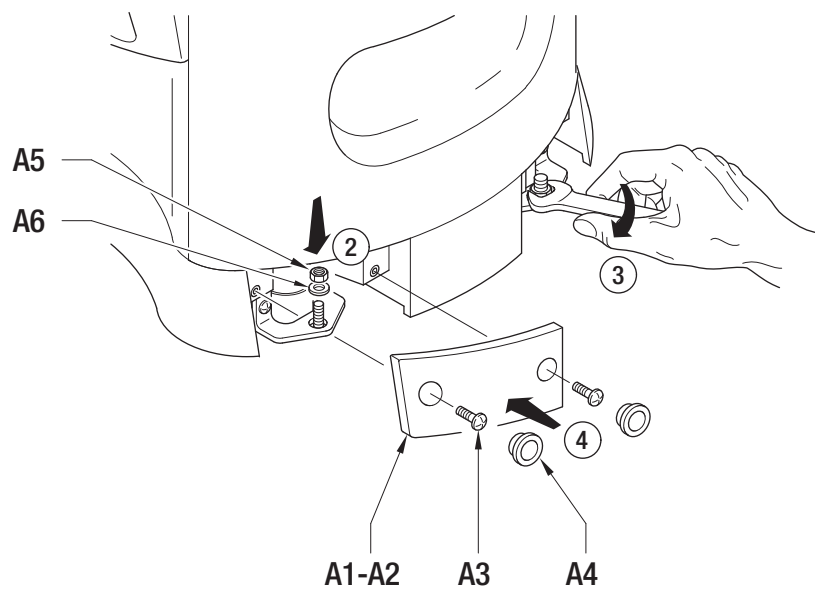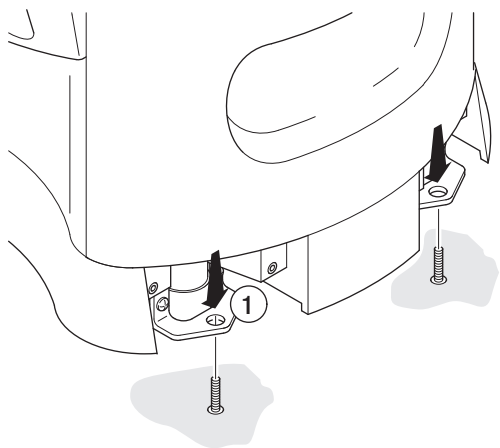

A1 A2		2DX 2SX	
A3		8	M5x20
A4		8	ø14-16
A5		4	M8
A6		4	ø9

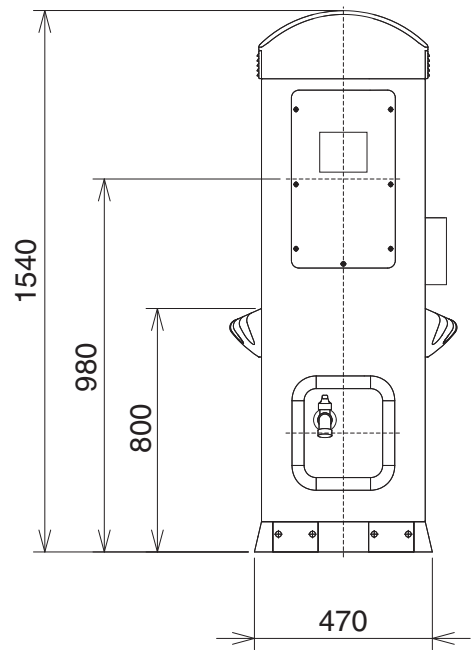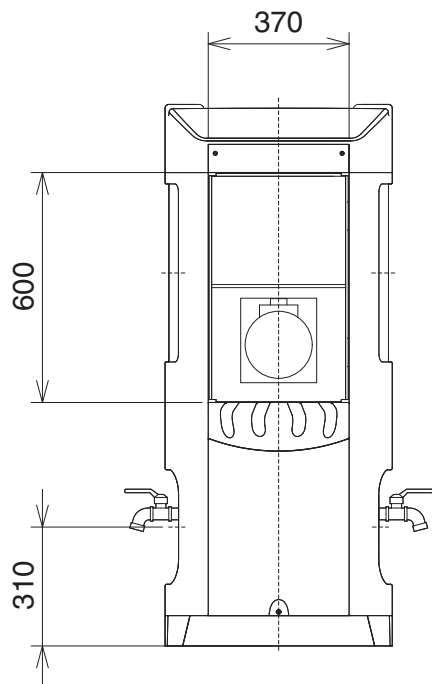




&




ON

- 1 Free Service!
- 2 Free Service!
- 3 Free Service!
- 4 Free Service!

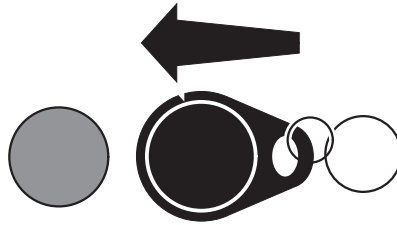


Choose Service


12
34

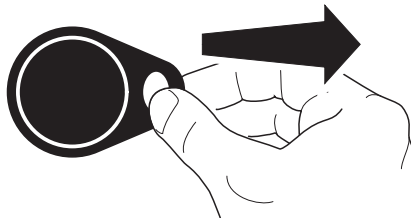


Choose Supplies
Service 1



Reposition the Key
to confirm
Selected Supply!




Reposition the Key
to confirm
Selected Supply!

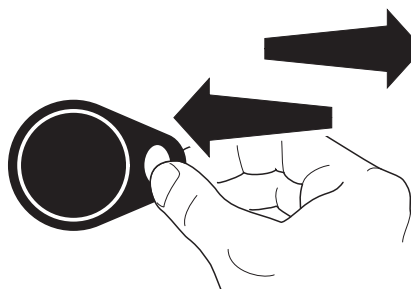




ON

- 1 Free Service!
- 2 Free Service!
- 3 Free Service!
- 4 Free Service!

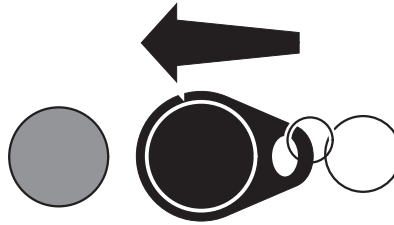


Choose Service


1 2
3 4

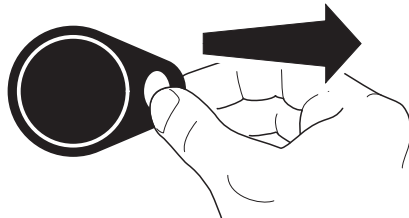


Choose Supplies
Service 1

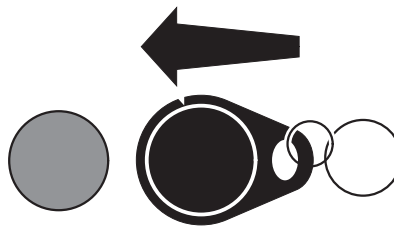

Choose Supplies
Service 1

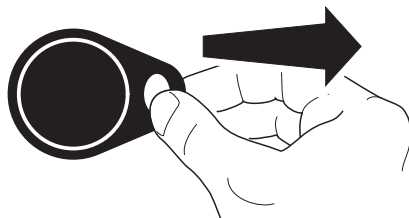


Reposition the Key
to confirm
Selected Supply!

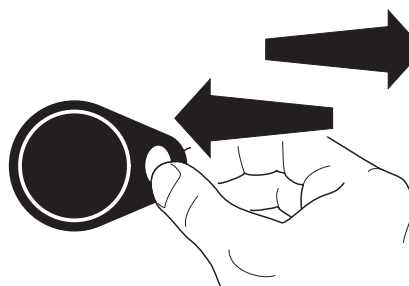




ON

- 1 Free Service!
2 Free Service!
3 Free Service!
4 Free Service!

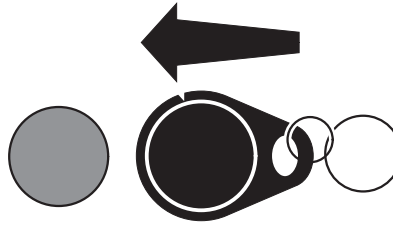


Choose Service


1 2
3 4

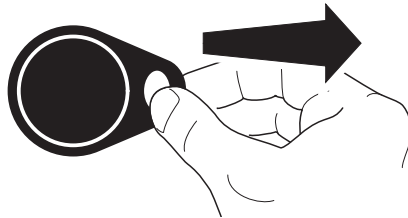


Choose Supplies
Service 1

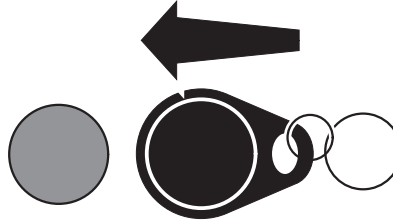

Choose Supplies
Service 1

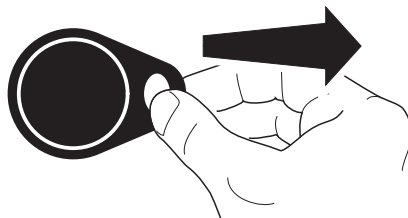

Reposition the Key
to confirm
Selected Supply!

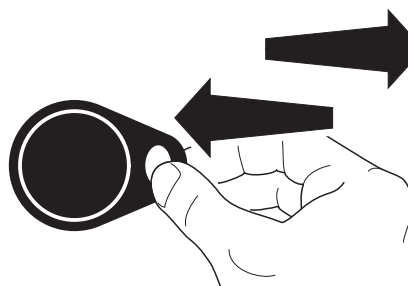




&




OFF

- 1 18h:42'
- 2 Free Service!
- 3 Free Service!
- 4 Free Service!

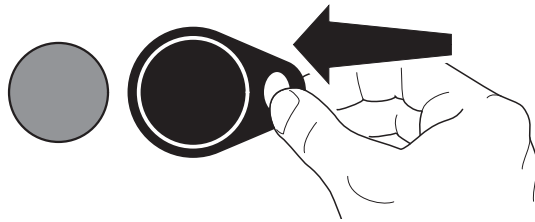


Choose Supplies
Service 1

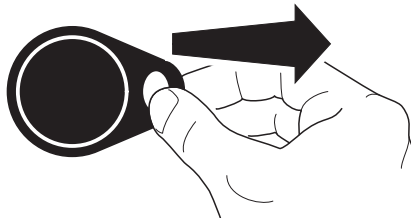


Reposition the Key
to confirm
Selected Supply!



OFF




Reposition the Key
to confirm
Selected Supply!

OFF

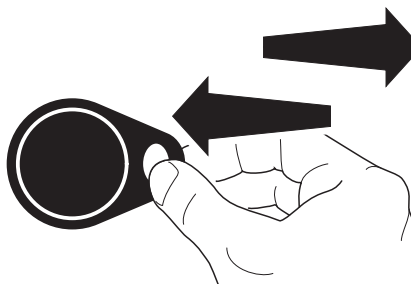


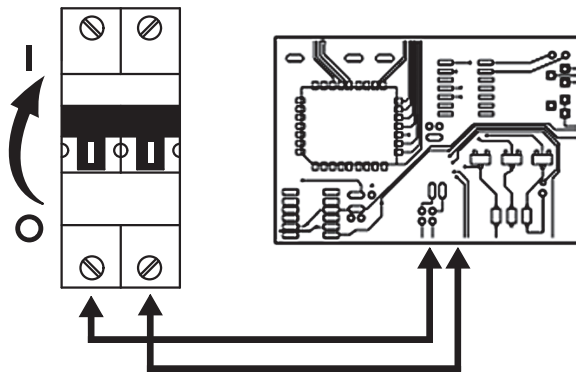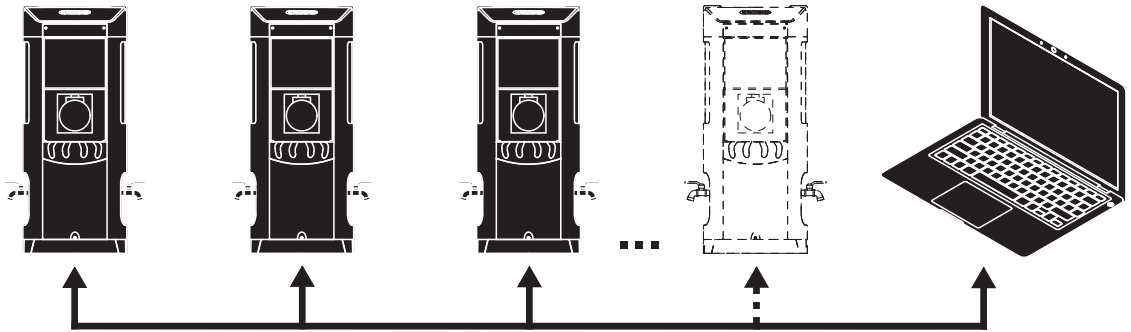


GEWISS
QMC SW Rev X.XX
4FN 16A
Code: XXXXX
ID Modbus: 25

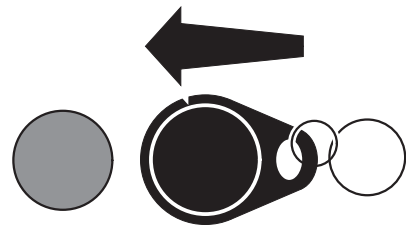

GEWISS
QMC SW Rev X.XX
4FN 16A
Code: XXXXX
ID Modbus: 00


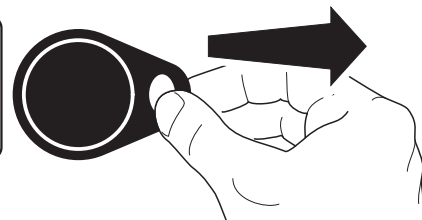


1 Free Service!
2 Free Service!
3 Free Service!
4 Free Service!








- 1 18h:42'
- 2
- 3 (C.Break)
- 4 Free Service!

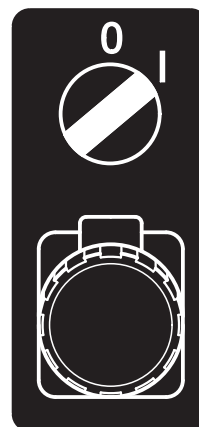


- 1 18h:42'
- 2 (Overload)
- 3 Free Service!
- 4 Free Service!

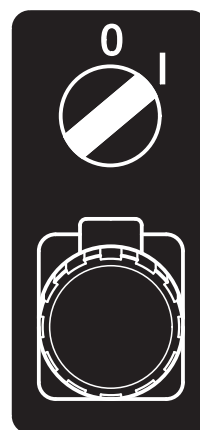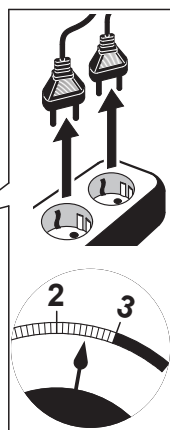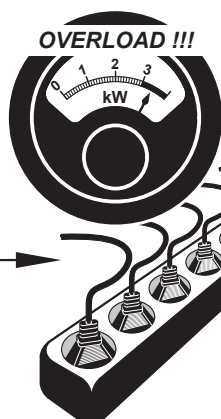

- 1 Out of credit
- 2
- 3 Free Service!
- 4 Free Service!




- 1 Free Service!
- 2 Free Service!
- 3 Free Service!
- 4 Free Service!



- 1 Reposition the Key to confirm
- 2 Reposition the Key
- 3
- 4

- 1 Reposition the Key to confirm
- 2 Reposition the Key
- 3
- 4



Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111

8.30 - 12.30 / 14.00 - 18.00
lunedì - venerdì - monday - friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com