


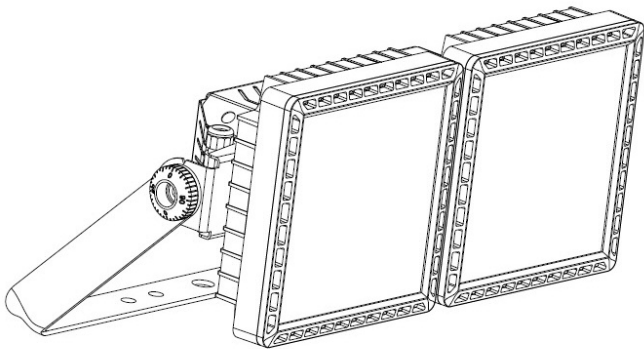

CE

IP66

+35°C

-25°C

t_q

+25°C

					V	A	W	t _a
	8.2	Max. 50 m	0.03 m ²	0.1 m ²	220-240 V 50/60 Hz	Max 1.4A	340W	Max 25°C
	8.2	Max. 50 m	0.03 m ²	0.1 m ²	220-240 V 50/60 Hz	Max 1.1A	260W	Max 35°C

LED CCT: ≤ 4000 K


Optics:					
	RG1:	RG1:	RG1:	RG1:	RG1:
	9 m	7 m	20 m	7 m	6 m




LED CCT: > 4000 K ; ≤ 5700 K

Optics:					
	RG1:	RG1:	RG1:	RG1:	RG1:
	11 m	8 m	24 m	9 m	7 m




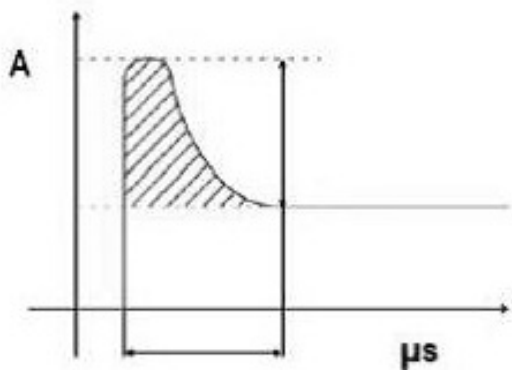

	I_{LED} (mA)	Inrush Current Peak and Width
2x9 LED	Max 1400 mA	70A/1200μs

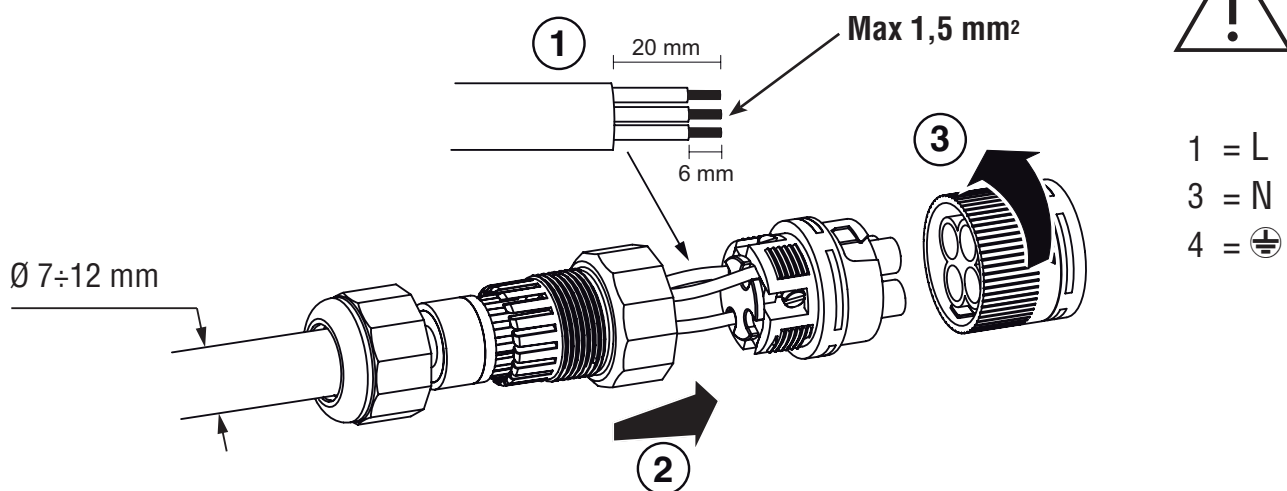

DIMMING 1-10V


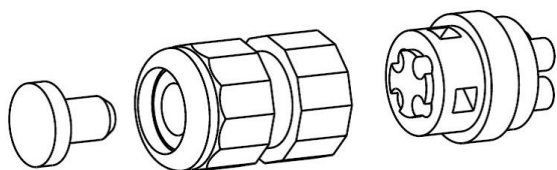


	I_{out}	1	3
SMART PRO HL	1400 mA	R 100 KΩ	
SMART PRO HE	1100 mA	R 82 KΩ	





DIMMING 0÷10V

1 = +
3 = -

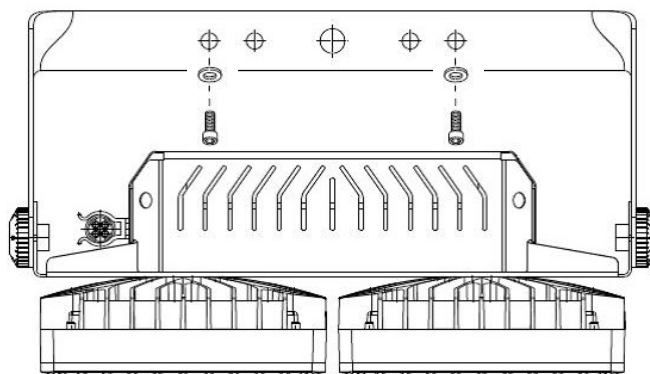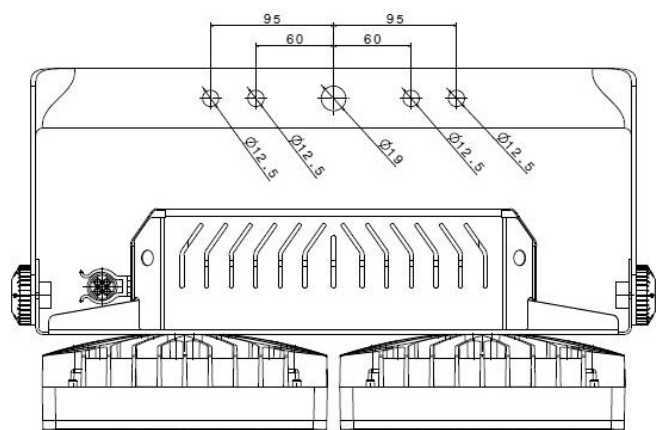




15 Nm

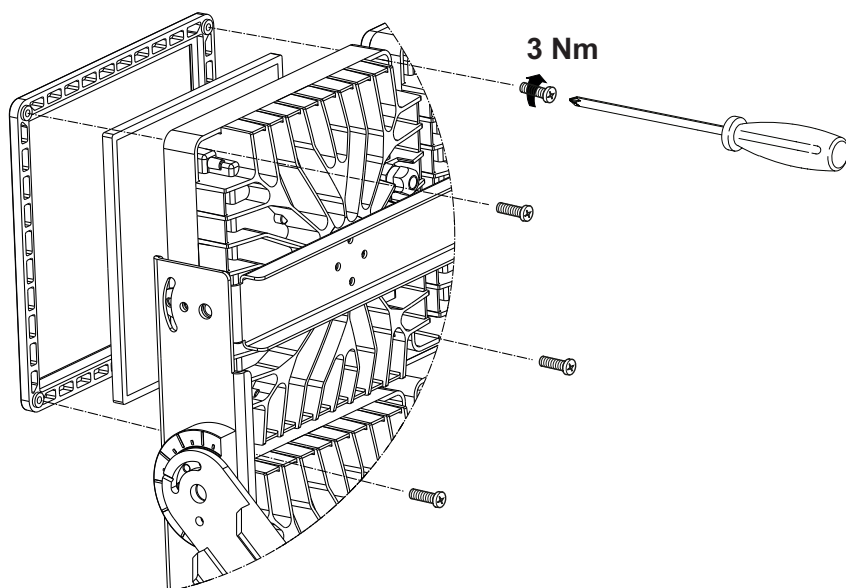

3 Nm

N°4



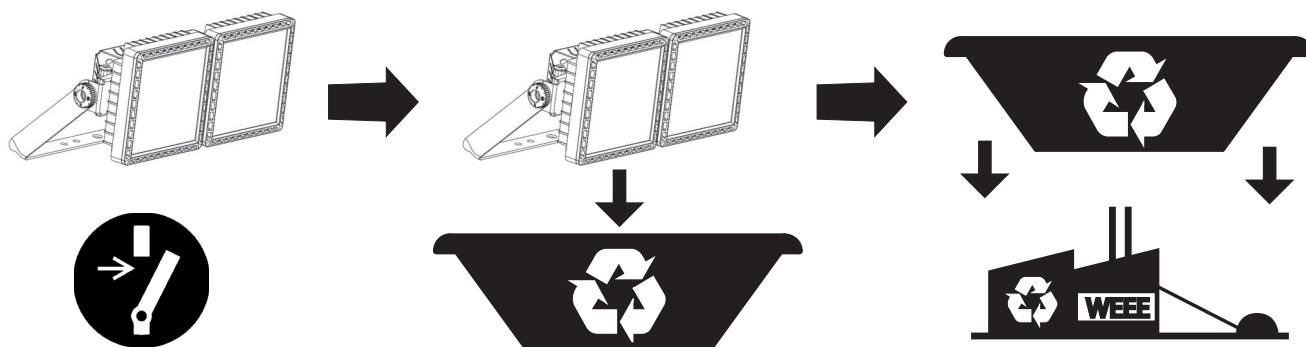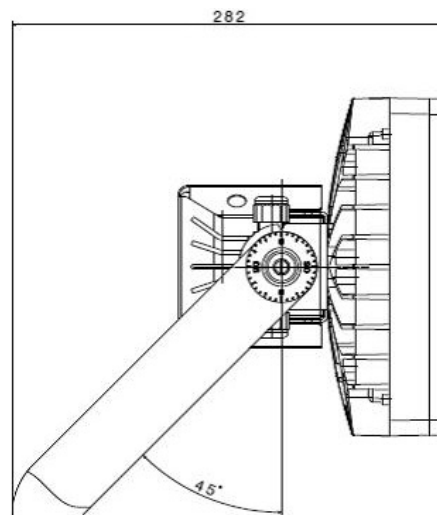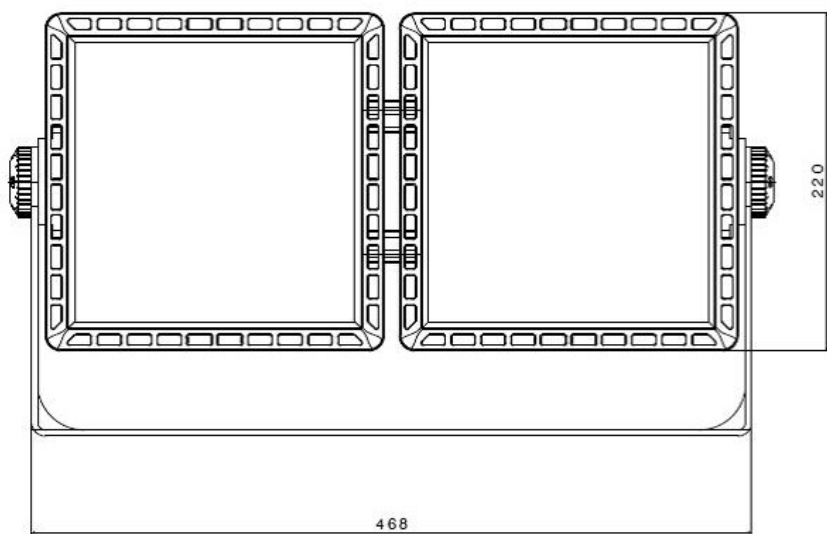

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com