

60x60/
62x62



30x120



IP40/IP20



IK04


RG0→200 mm

$t_{min} -25^{\circ}C$


$t_a +40^{\circ}C$

	2x98 LED	2,8
	1x196 LED	3,3


	STAND-ALONE	0,2
	DALI / 1-10V	0,3

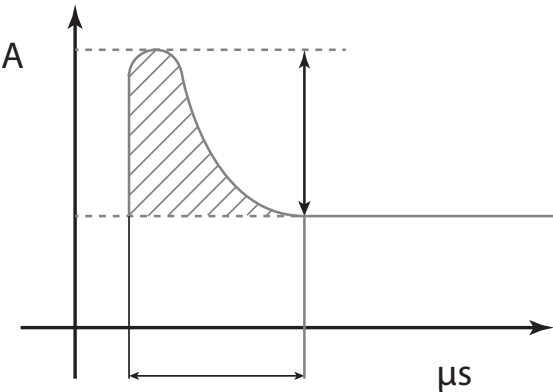







W	I _{LED} (mA)	Inrush Current Peak and Width
26	Max. 800	Max. 50A / 80μs
36	Max. 800	Max. 50A / 115μs
40	Max. 850	Max. 30A / 115μs

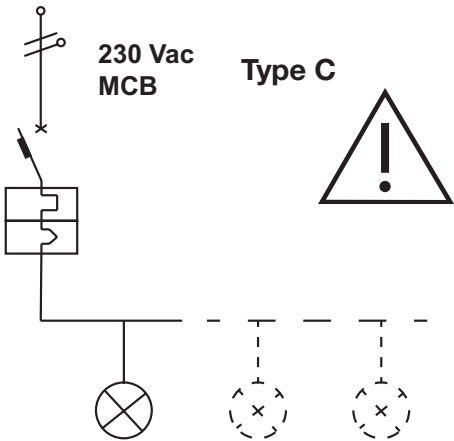

MCB Type C	26W	36W	40W
	Max 4	Max 8	Max 10

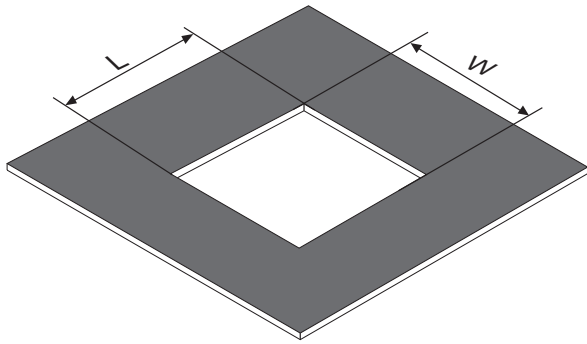


		L	W
ASTRID FULL PANEL 60x60		571 mm	571 mm
ASTRID FULL PANEL 62x62		596 mm	596 mm
ASTRID FULL PANEL 30x120		1171 mm	271 mm

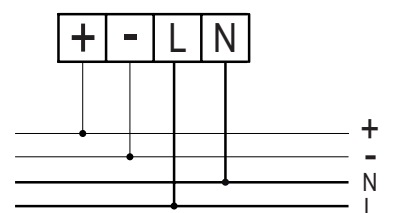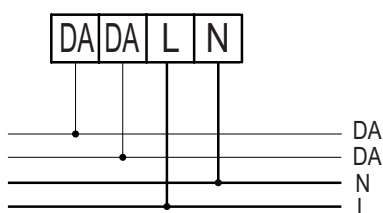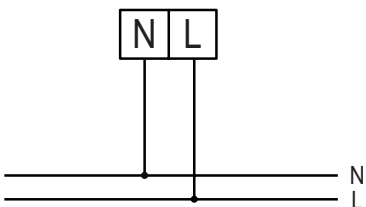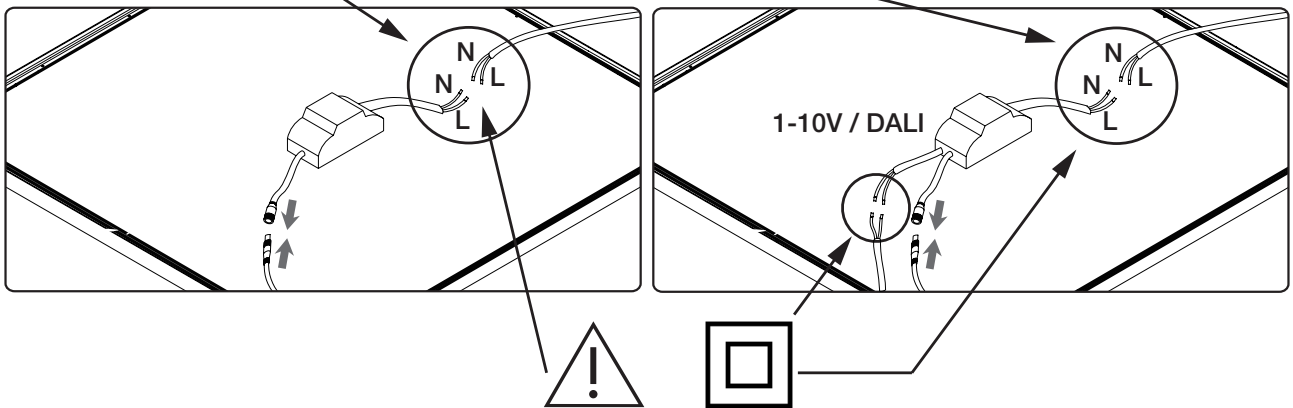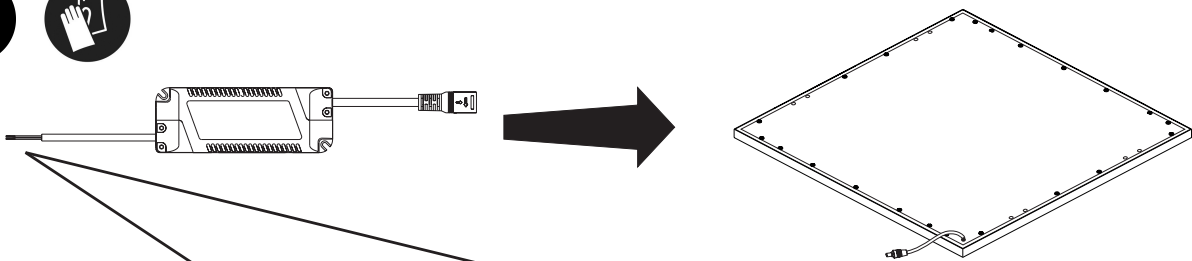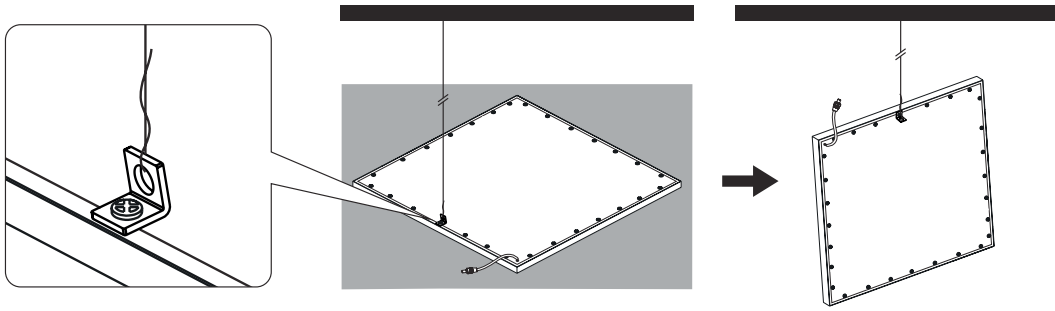




GW S2 995




8 x M3,5x6 mm




4 x M4x10 mm



4 x




4 x




4 x 4x30 mm





+



4 x




1 x

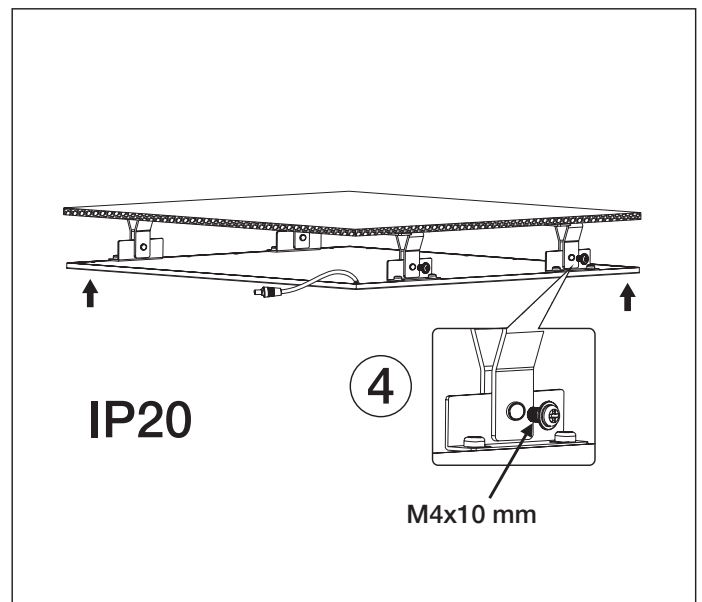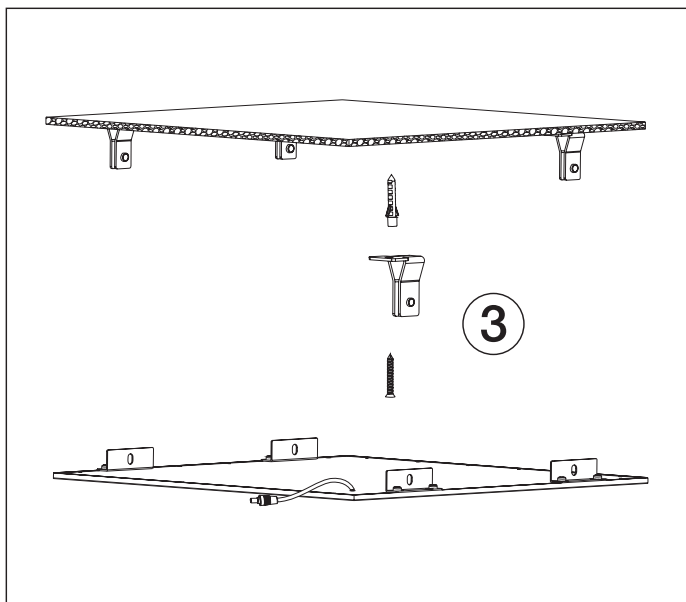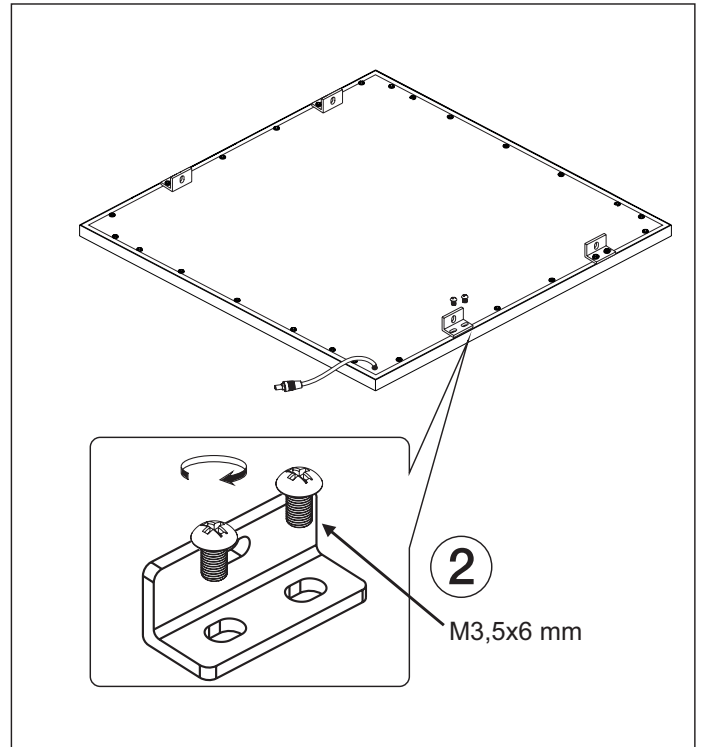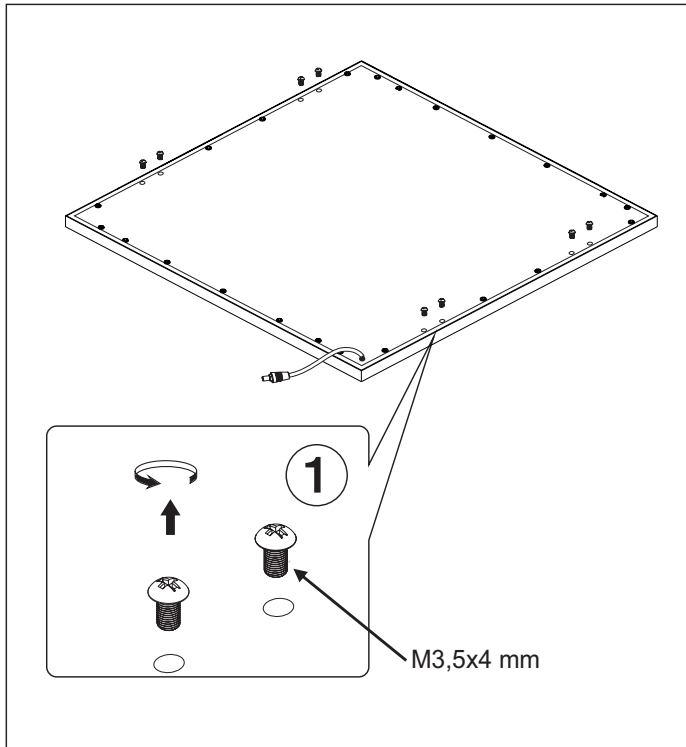





GW S2 996



4 x




4 x







8 x M3,5x6 mm



4 x 4x30 mm




4 x

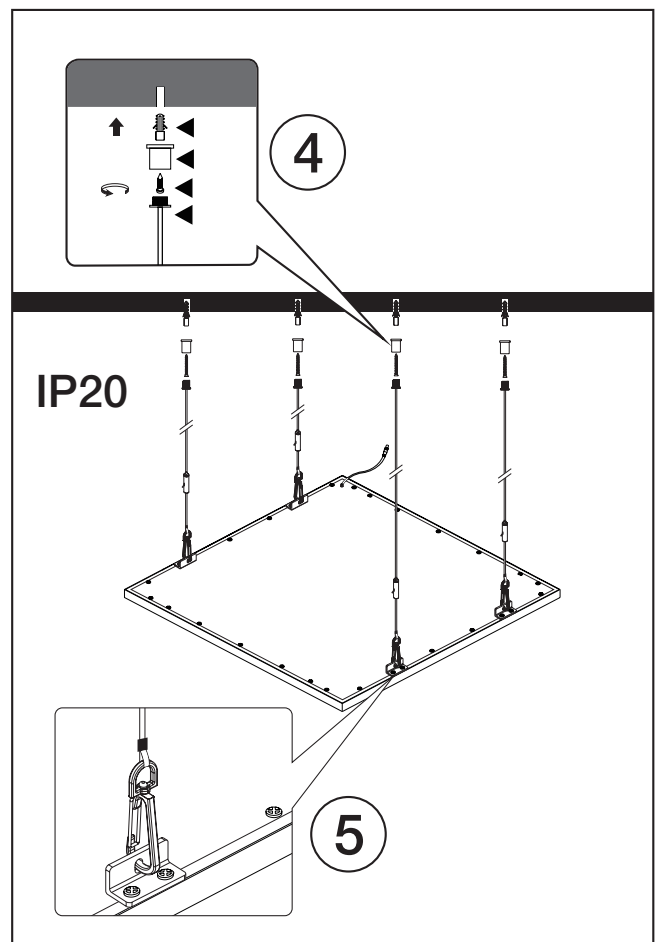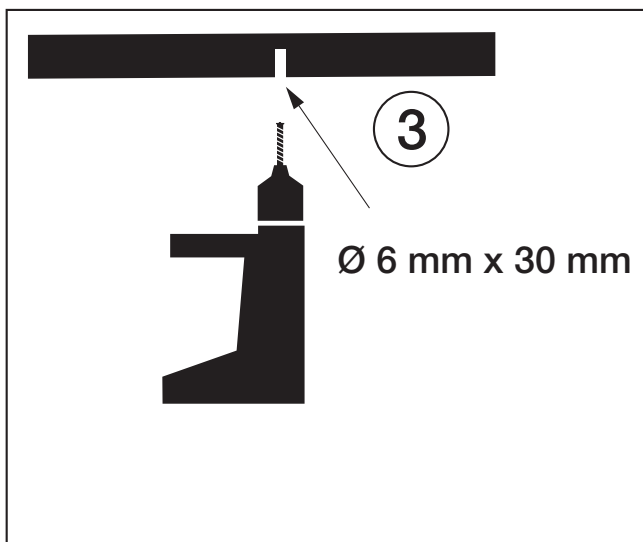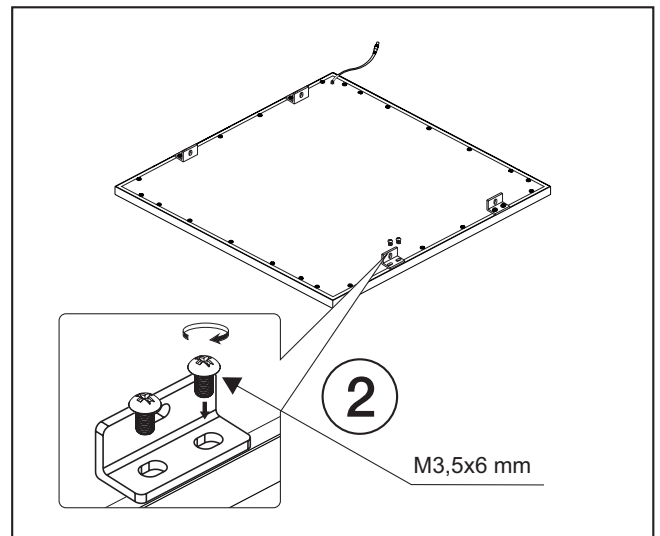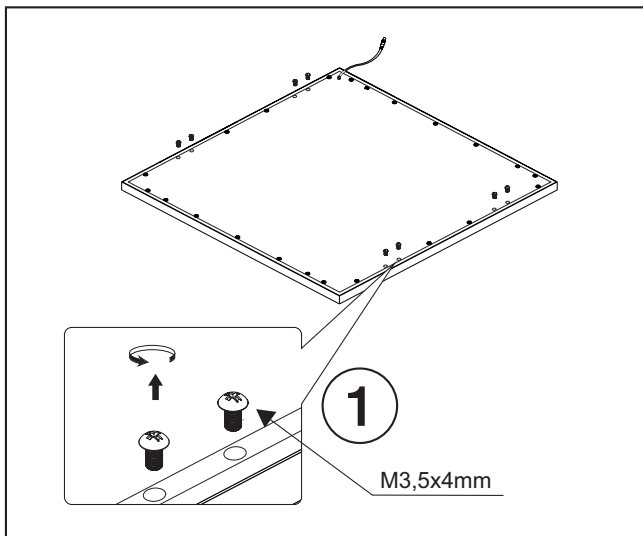








GW S2 993




4 x




8 x M3,5x6 mm

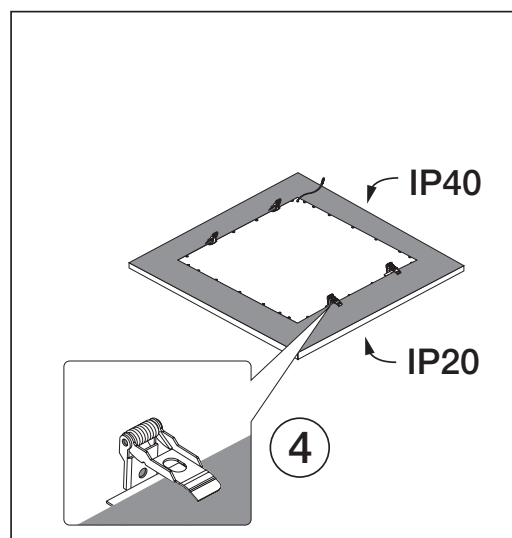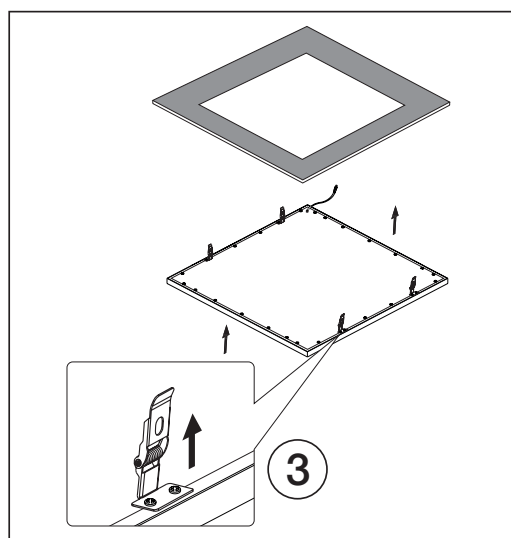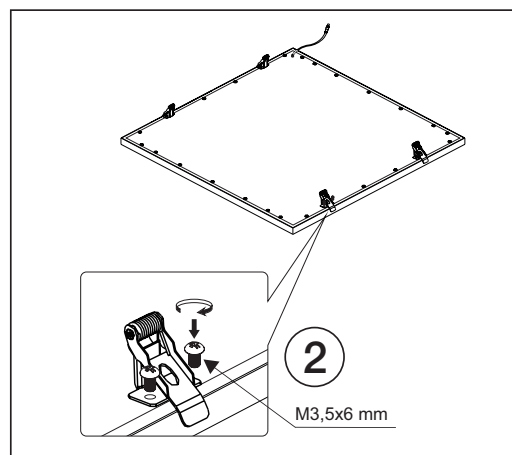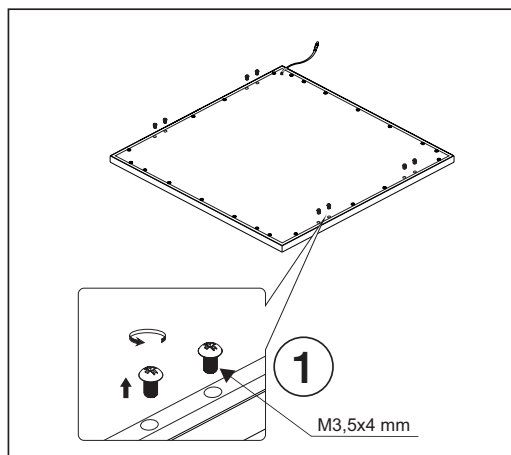


GW S2 994

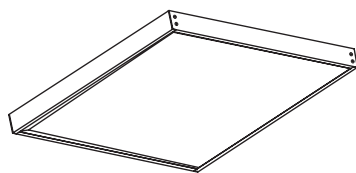


60x60

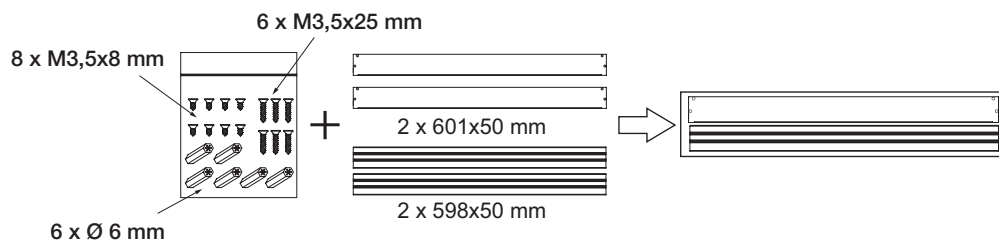


GW S2 999

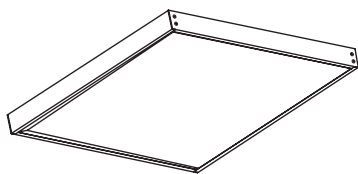




62x62

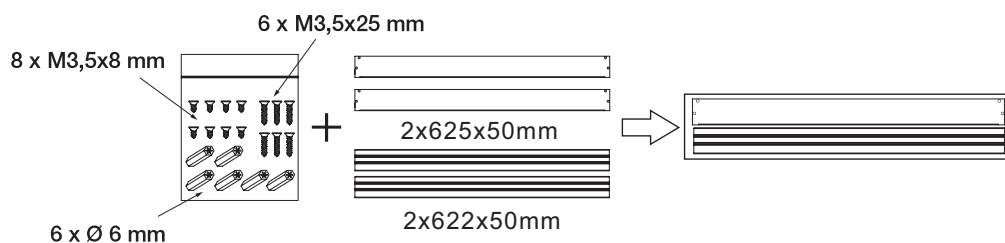


60x60

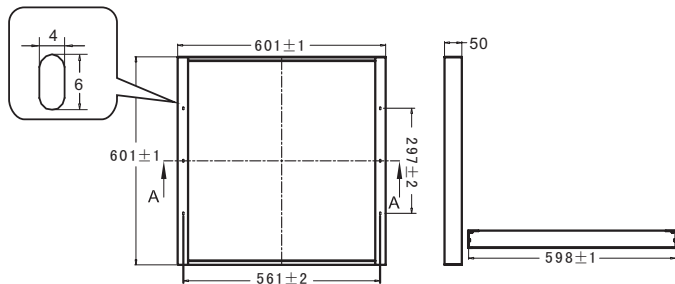


62x62

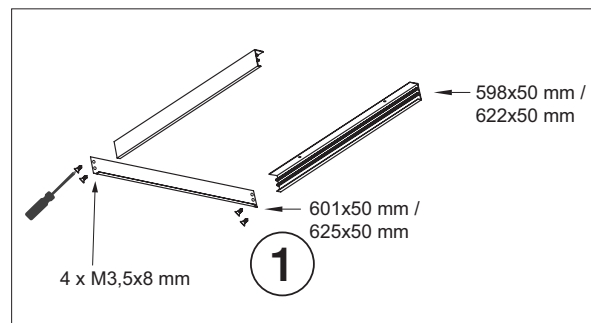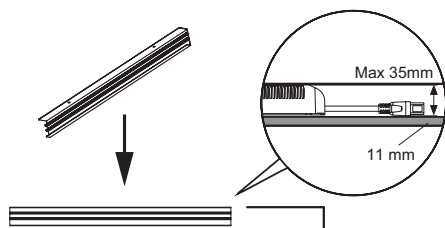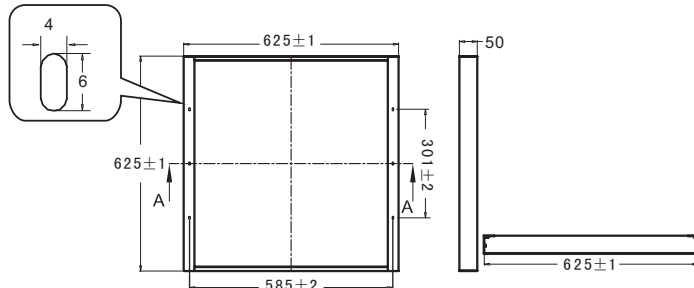

60x60

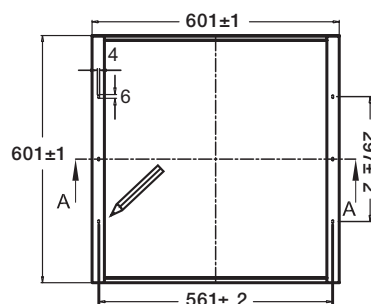

62x62

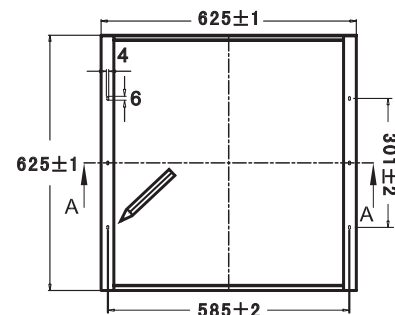

M3,5x25 mm


598x50 mm /
622x50 mm

601x50 mm /
625x50 mm


4 x M3,5x8 mm



GW S2 998

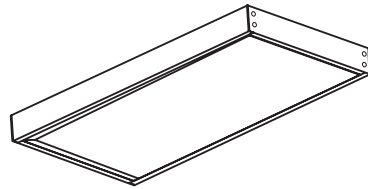


30x120




M3,5x8 mm

M3,5x25 mm




Ø 6 mm











2 x 301x50 mm



2 x 1198x50 mm

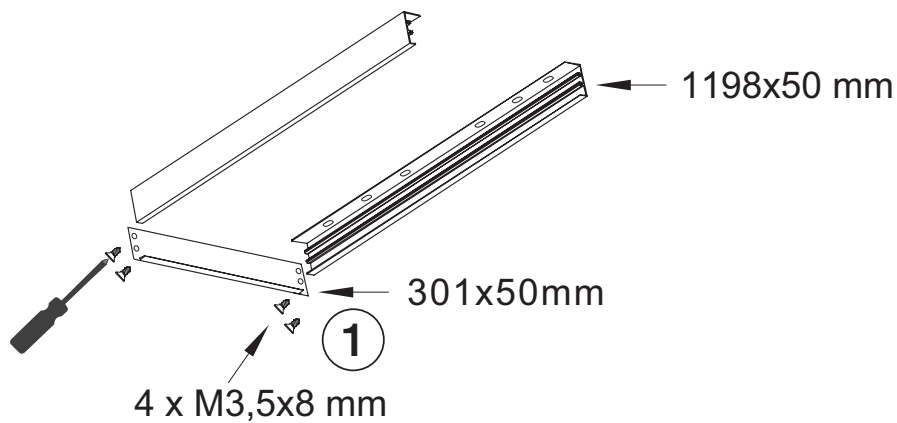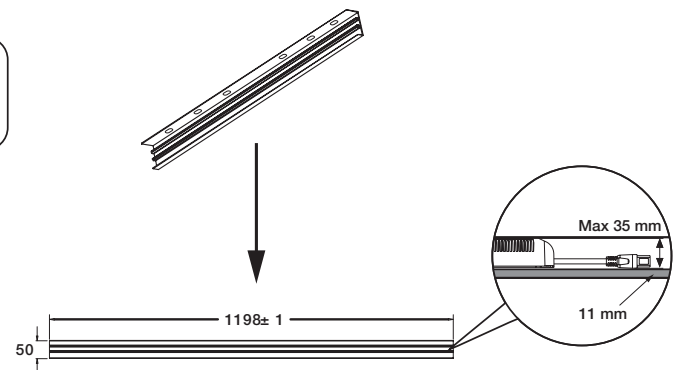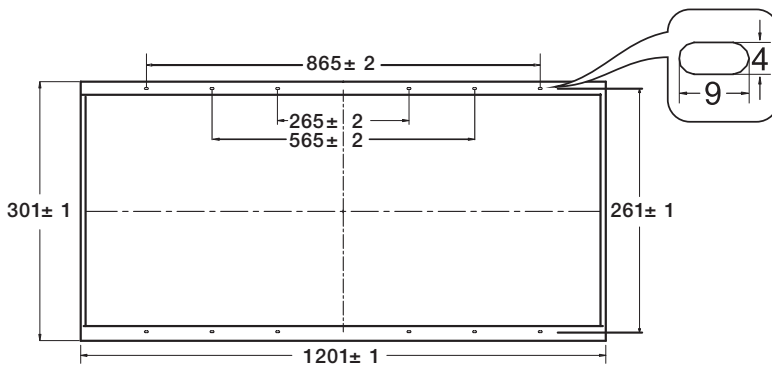

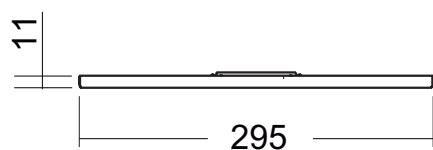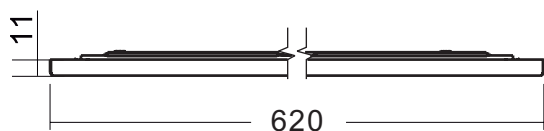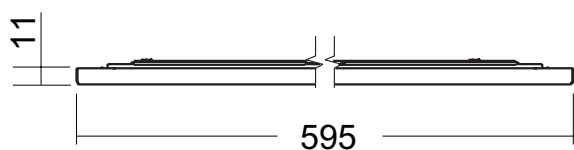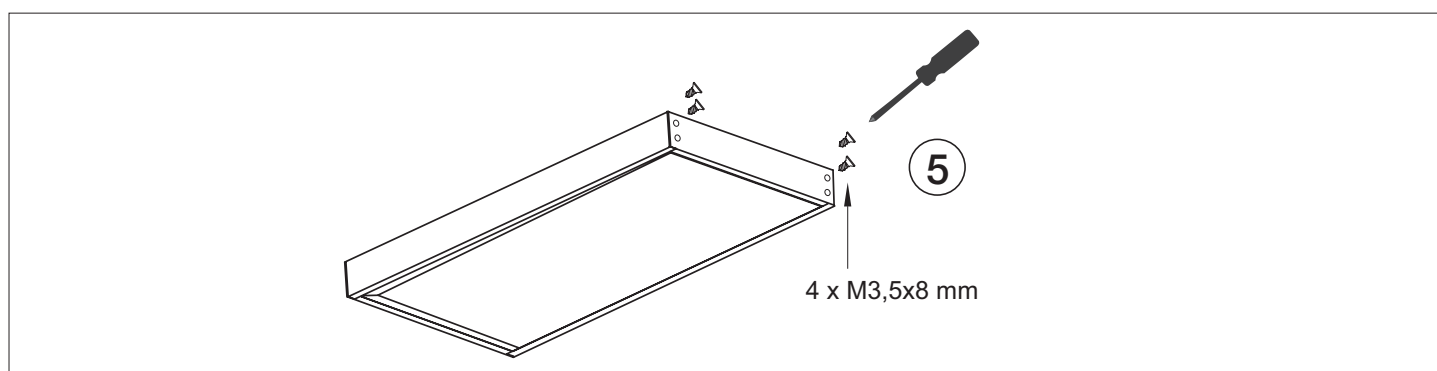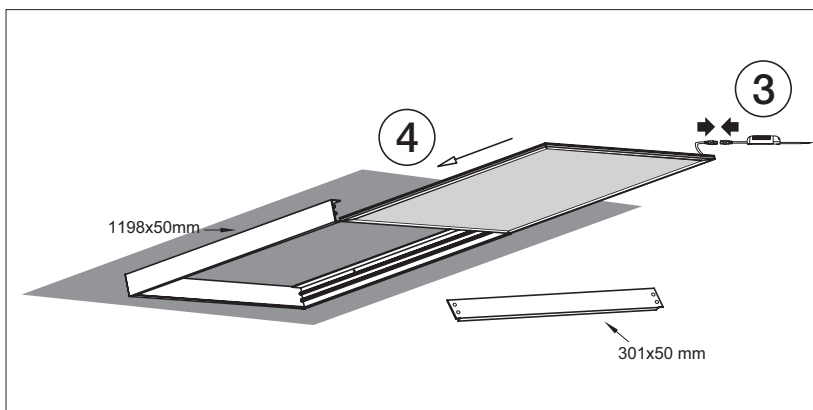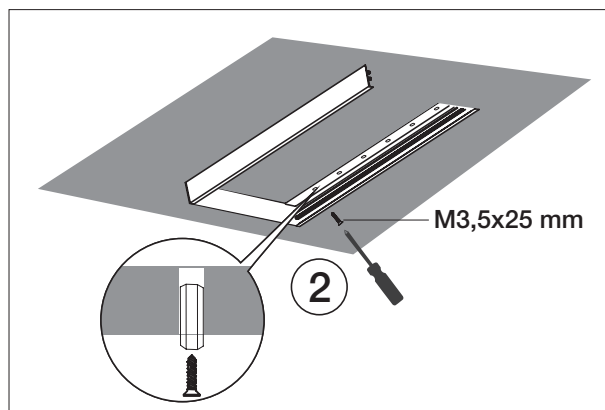

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com