


HIGHBAY - FLOODLIGHTS

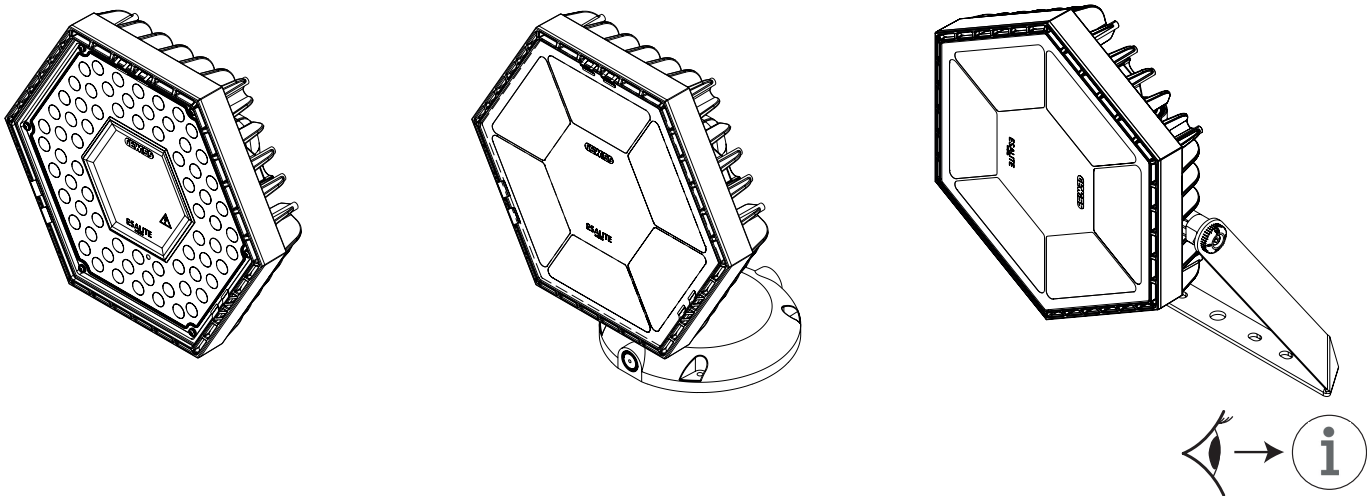

+

50°C

-

30°C


t_q


25°C

	IP		
	IP55		
	IP66		

	I _{LED} (A)		
	ta 50°C	ta 45°C	ta 40°C
12 K	700 mA	700 mA	700 mA
16 K	600 mA	600 mA	600 mA
20 K	570 mA	650 mA	700 mA


	7,5	Max. 30 m	0,12 m²	0,05 m²
	8,5	Max. 30 m	0,14 m²	0,07 m²
	9,5	Max. 30 m	0,13 m²	0,07 m²

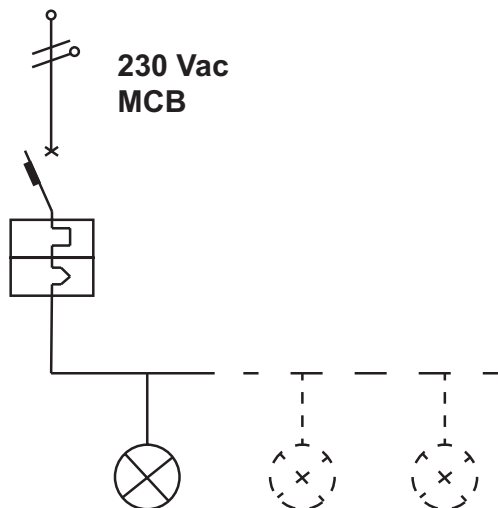


MCB Type C	10A	16A	20A
	2	4	6
MCB Type D	10A	16A	20A
	6	10	12


	$\leq 5700K$			
	30°	60°	90°	Elliptical
	RG1:	RG1:	RG1:	RG1:
	2,5 m	3,5 m	3 m	4 m

.....m


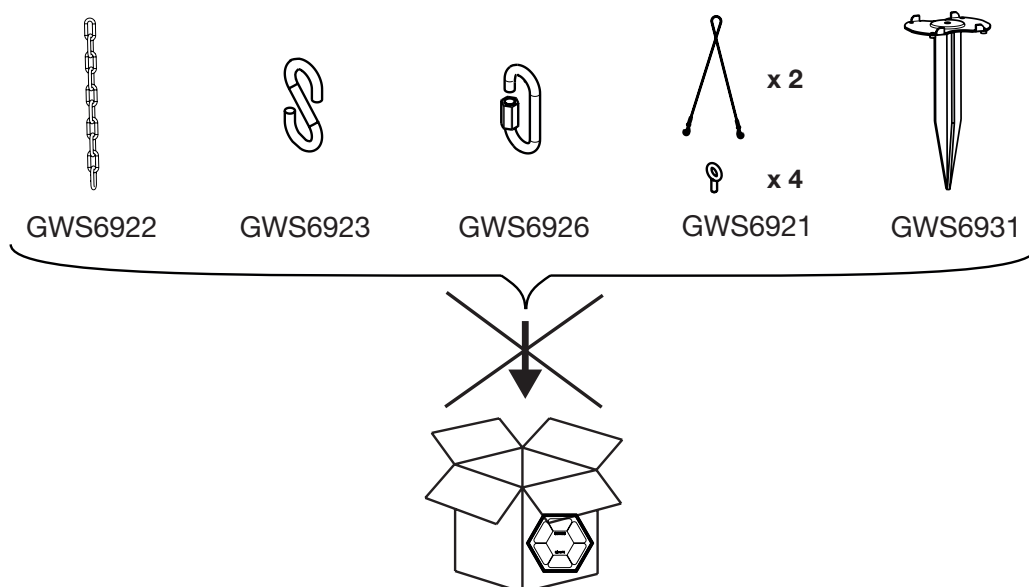


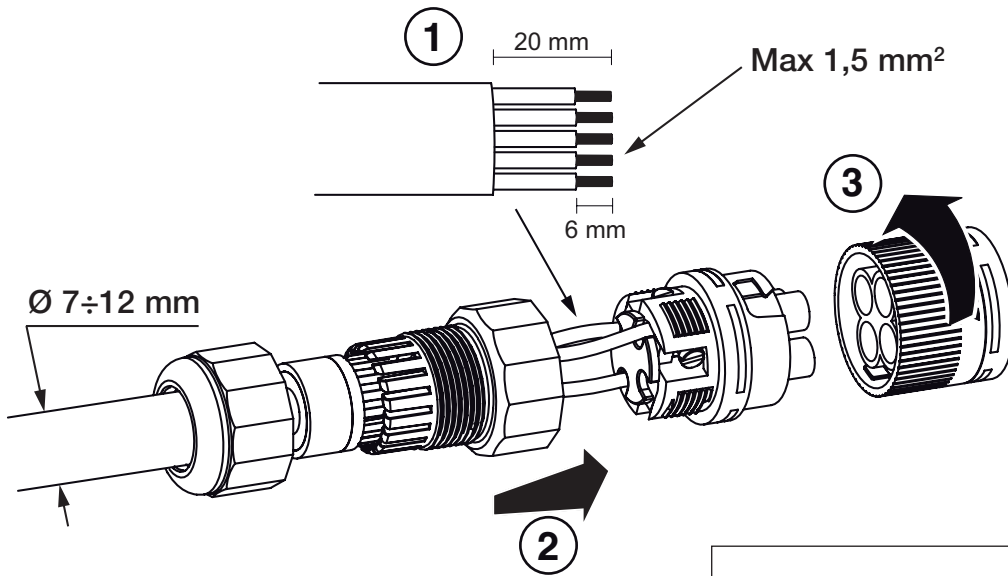

①	=	L
③	=	N
④	=	⊕
②	=	DALI
⑤	=	

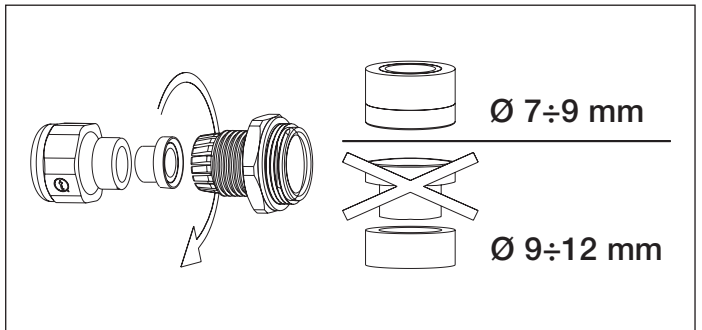


Min. +30cm

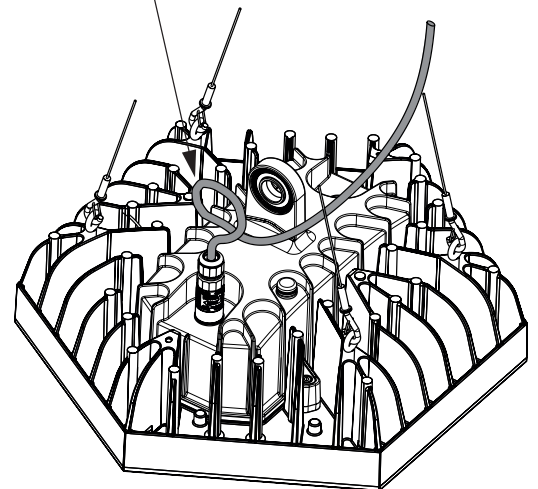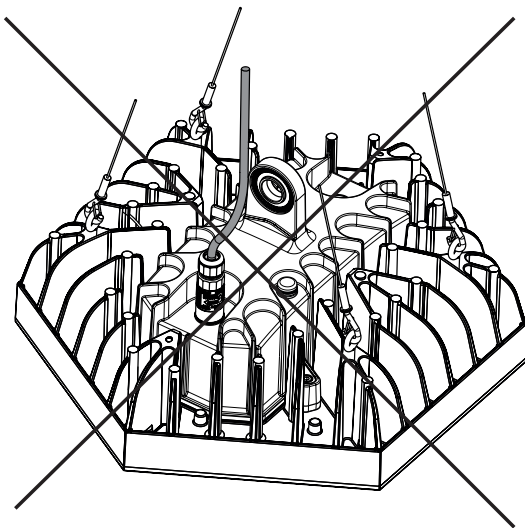






30° - 60° - 90°

ELLIPTICAL

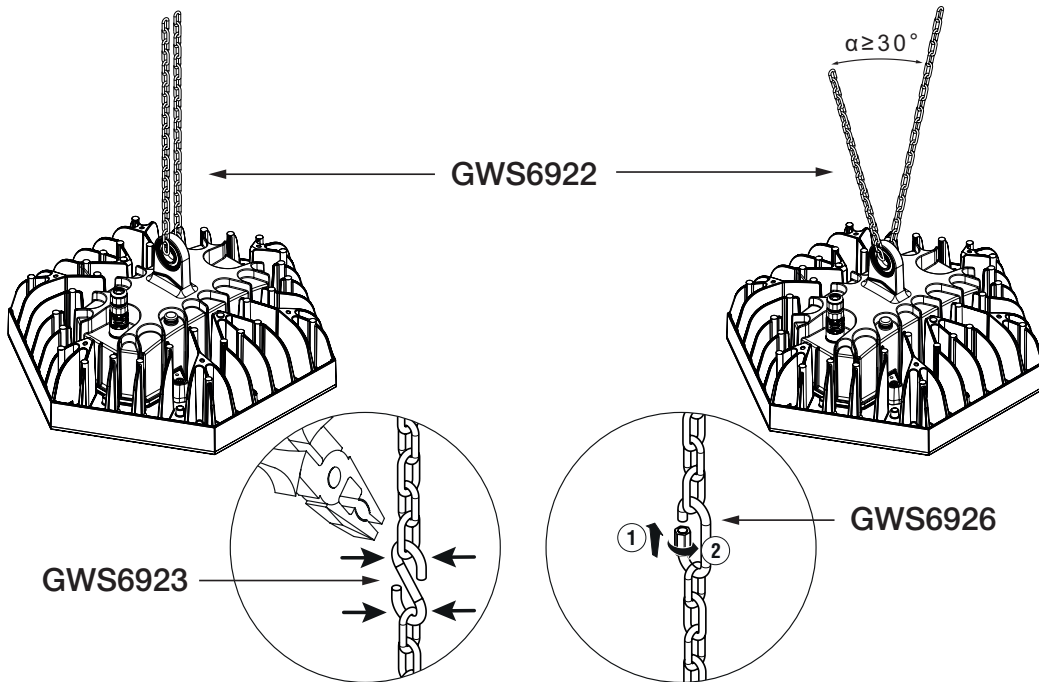


30° - 60° - 90°

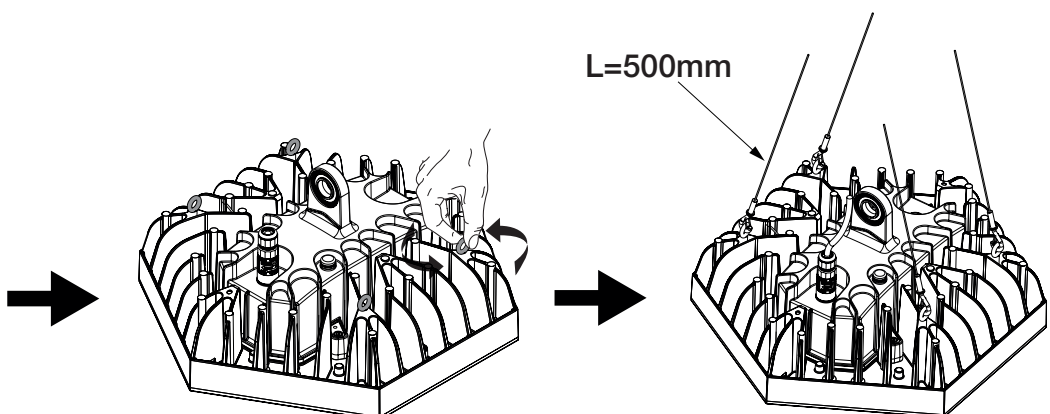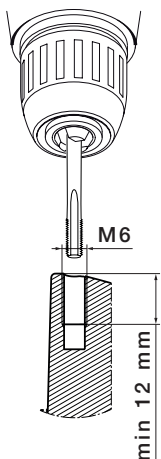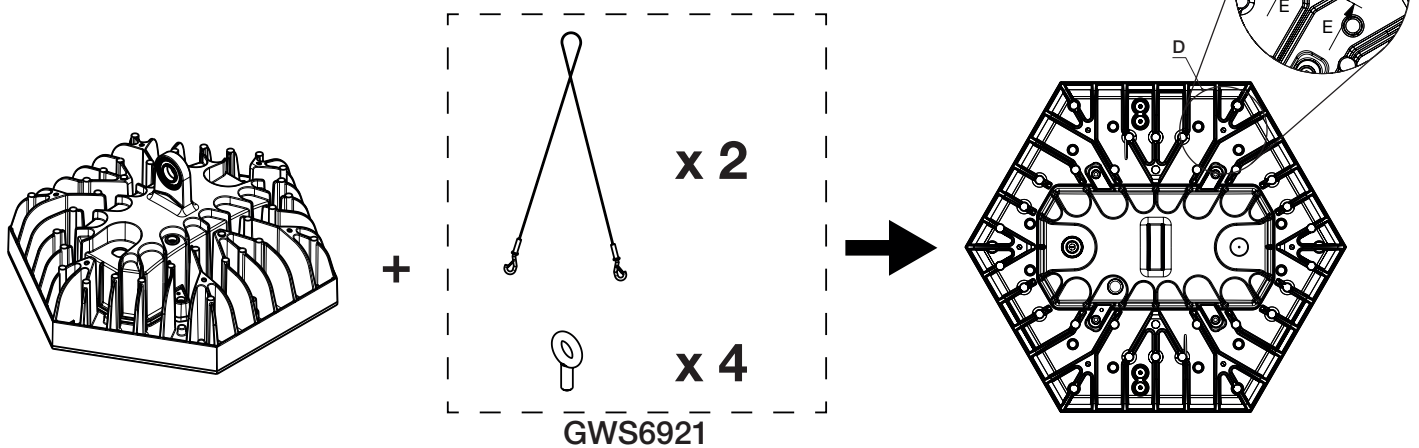





ELLIPTICAL

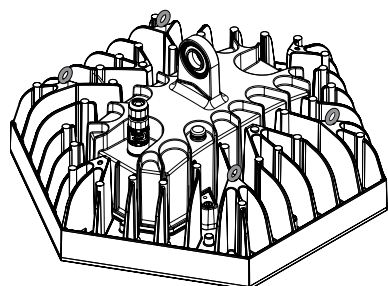




+

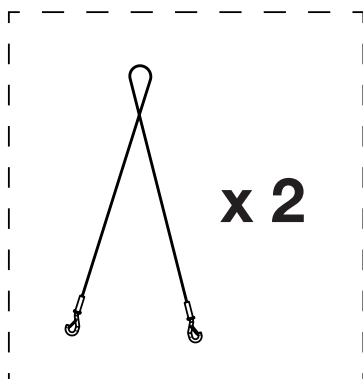




L=500mm





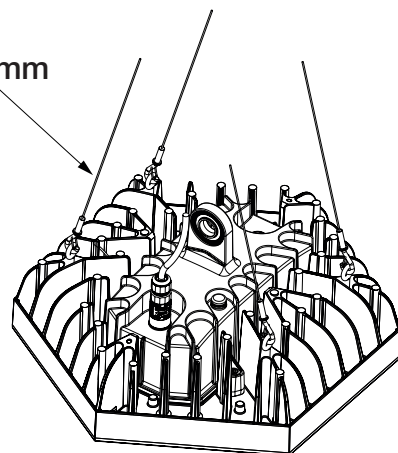


30° - 60° - 90° - ELLIPTICAL

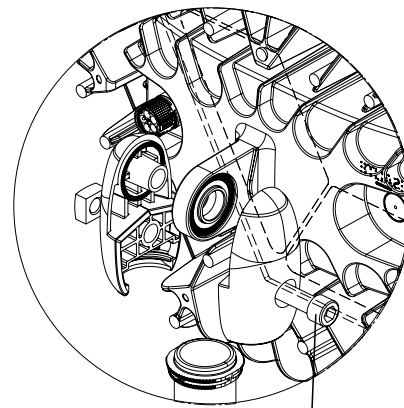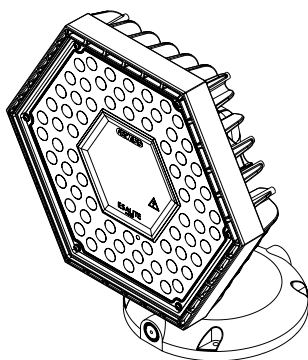
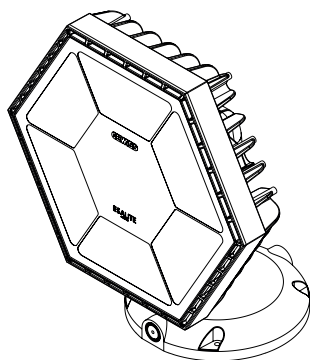


Max 25 Nm

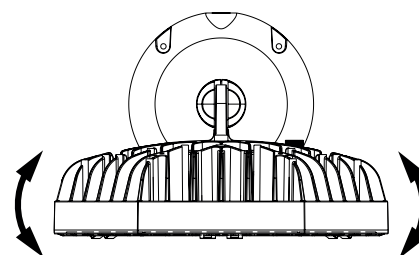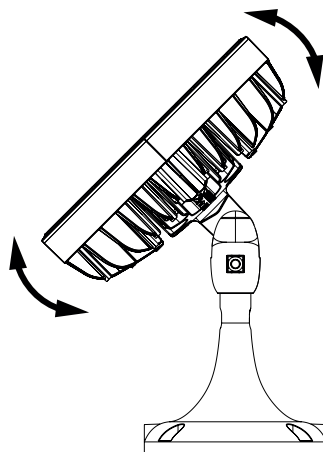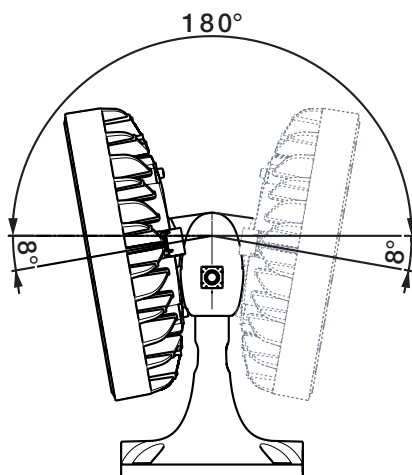

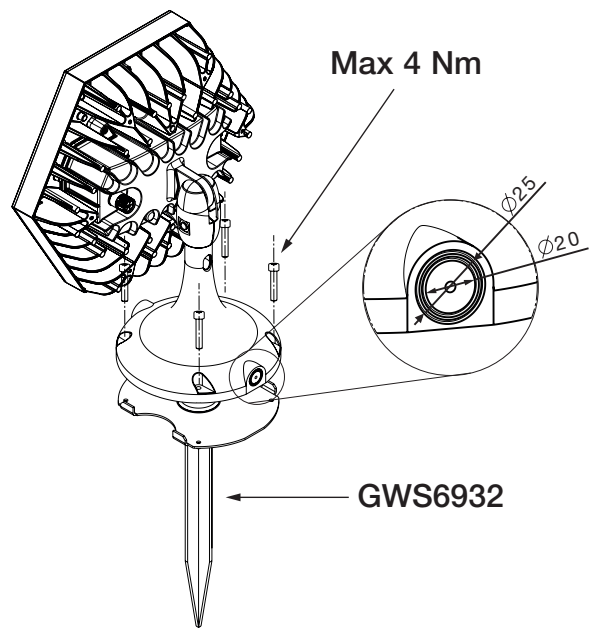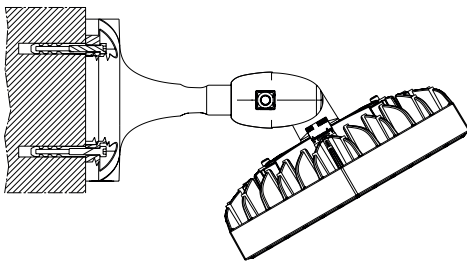
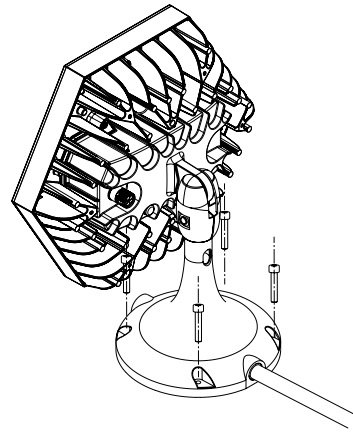



ON REQUEST

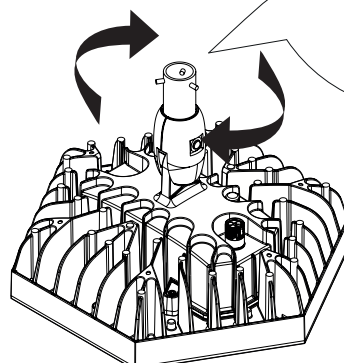








30° - 60° - 90° - ELLIPTICAL

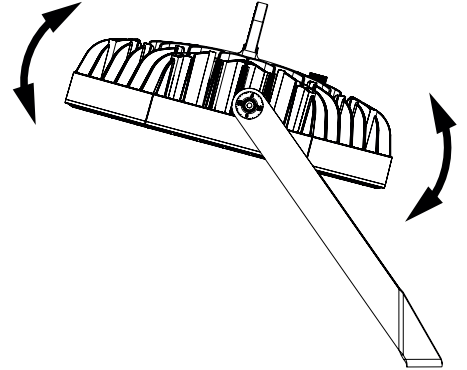



Max 8 Nm


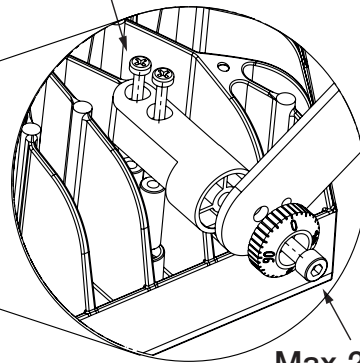
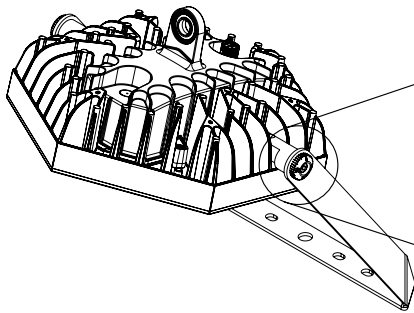


Max 25 Nm

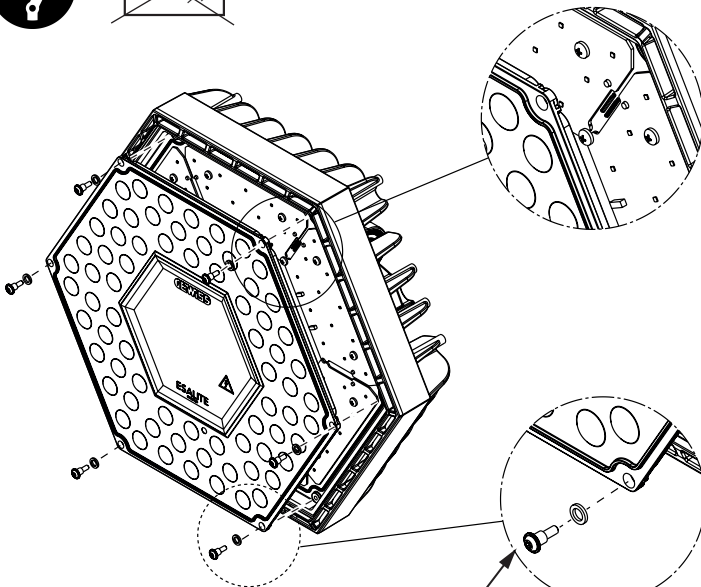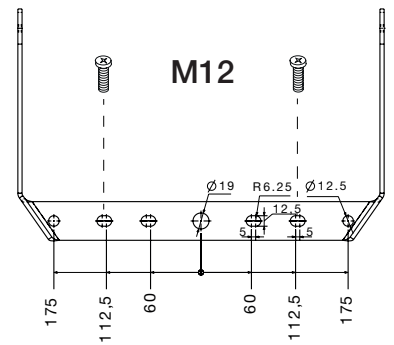

Max 4 Nm



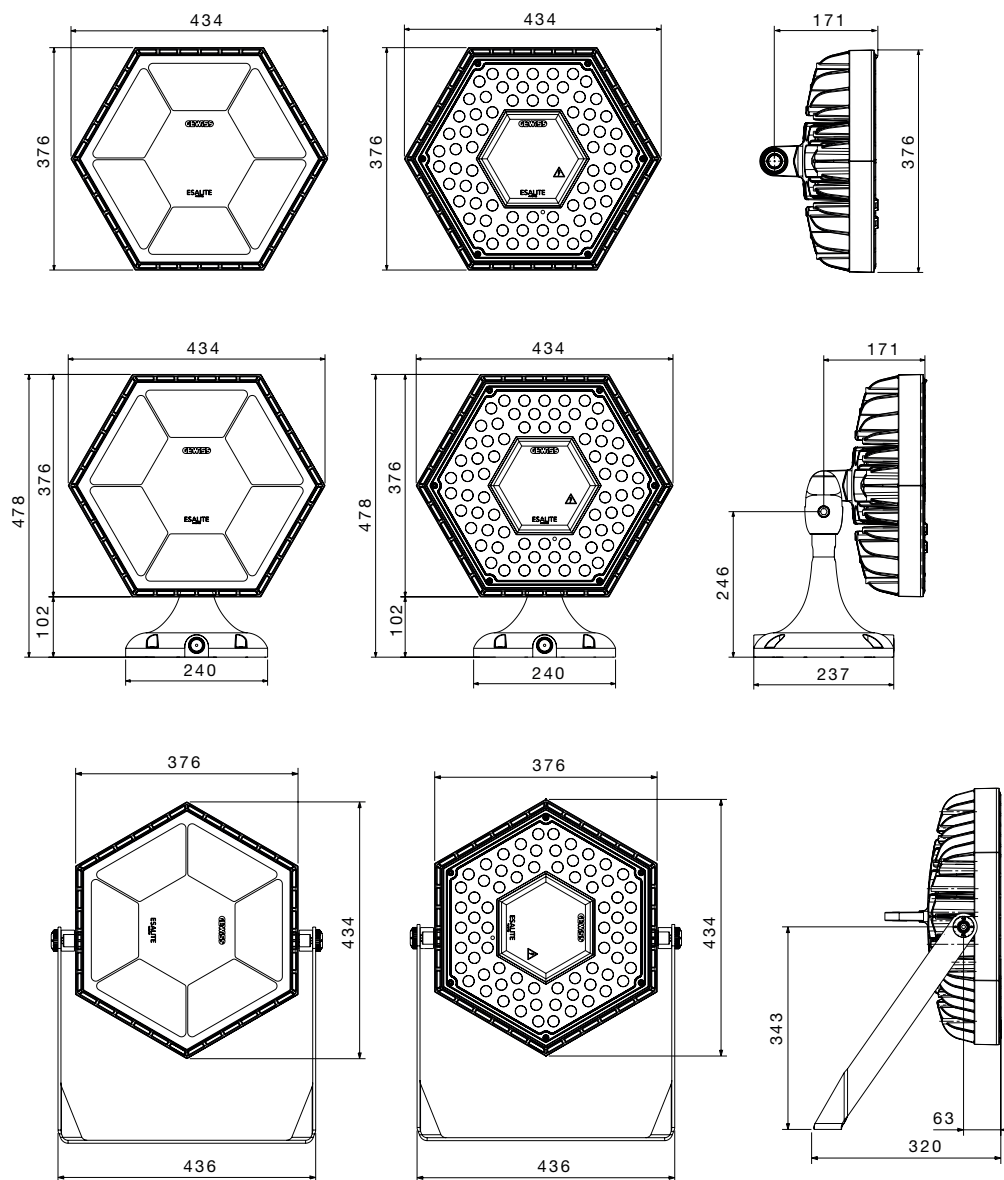

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com