

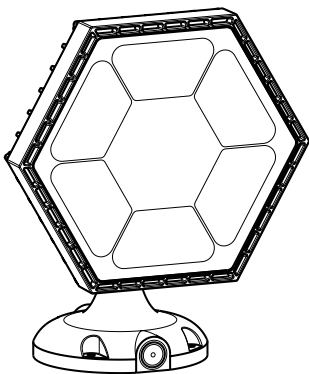
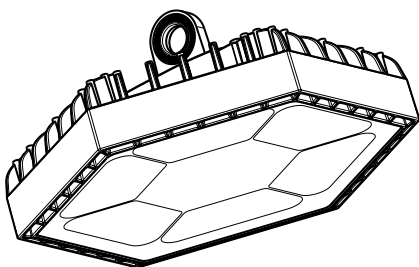



HIGHBAY - FLOODLIGHTS

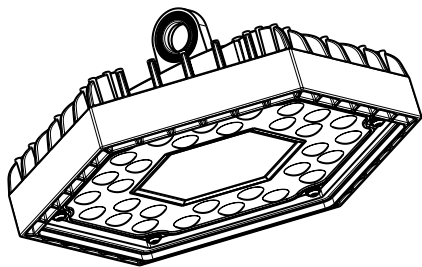

$t_a +50^{\circ}\text{C} / t_q 25^{\circ}\text{C}$



	IP		
	IP55		
	IP66		


	2,8 Kg	Max. 15 m	0,06 m²	0,02 m²
	3,3 Kg	Max. 15 m	0,06 m²	0,02 m²
	3,8 Kg	Max. 15 m	0,07 m²	0,03 m²

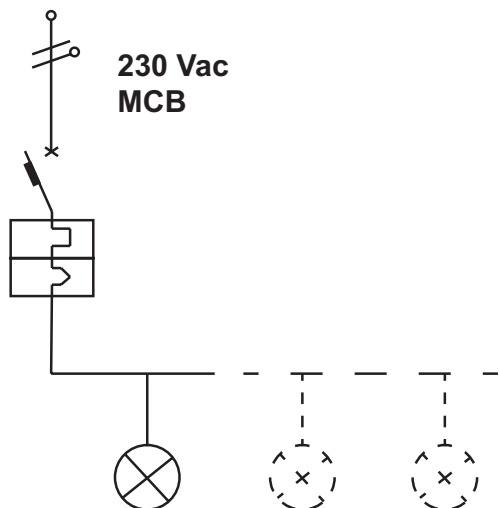



MCB Type B	10A	16A	20A
	1	2	3
MCB Type C	10A	16A	20A
	3	6	8
MCB Type D	10A	16A	20A
	8	12	14

	≤ 5700K			
	30°	60°	90°	Elliptical
	RG1:	RG1:	RG1:	RG1:
	2,5 m	3,5 m	3 m	4 m

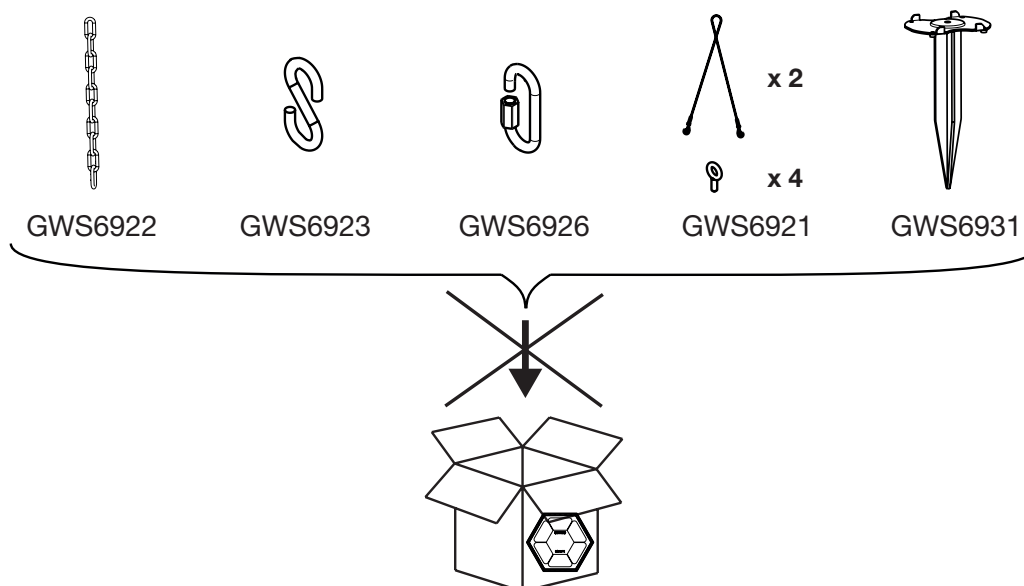

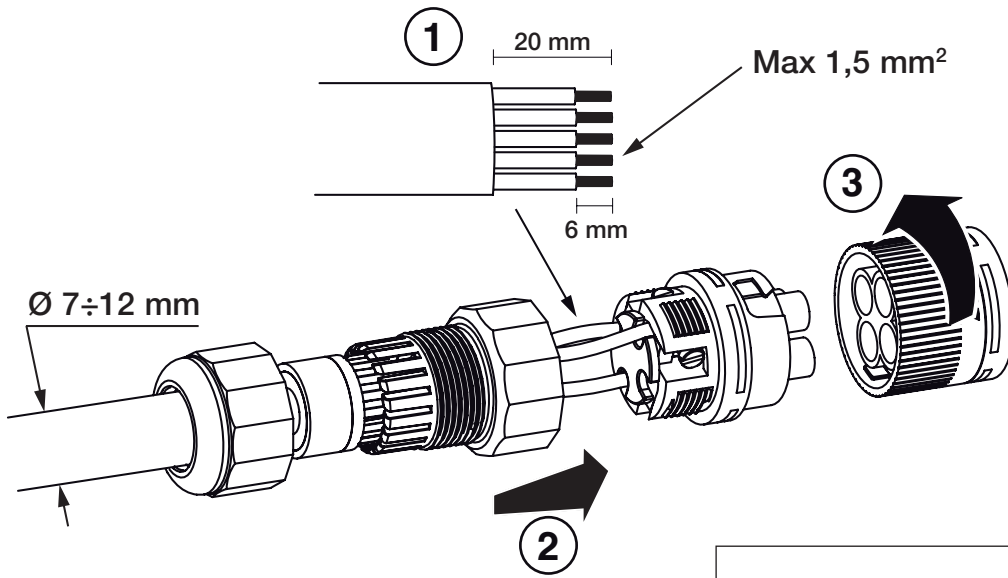

①	=	L
③	=	N
④	=	⊕
②	=	DALI
⑤	=	

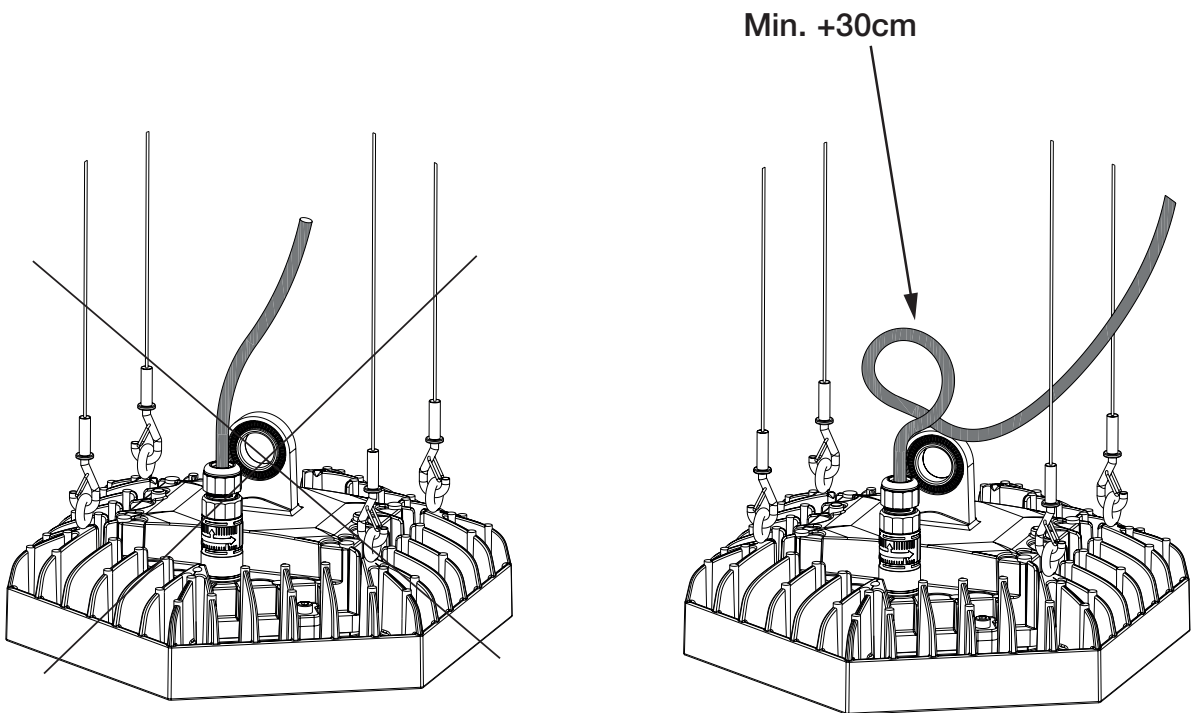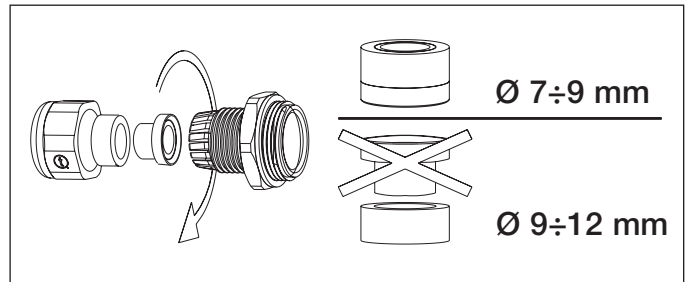





30° - 60° - 90°


ELLIPTICAL

$\alpha \geq 30^\circ$


GWS6922

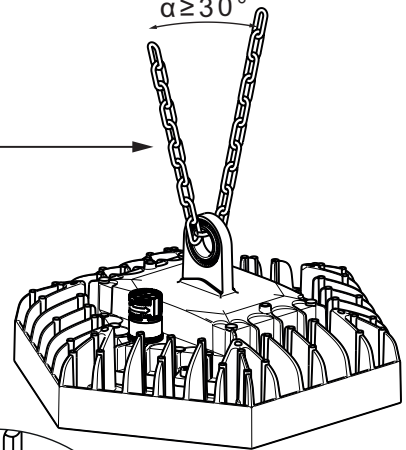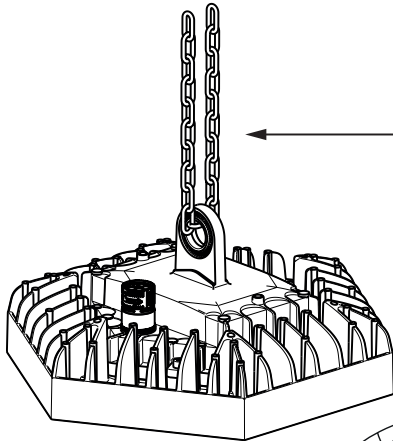


GWS6923




GWS6926







30° - 60° - 90°



+

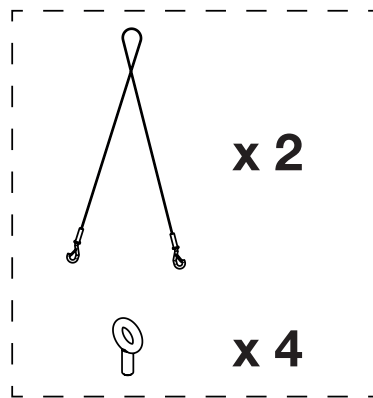


GWS6921

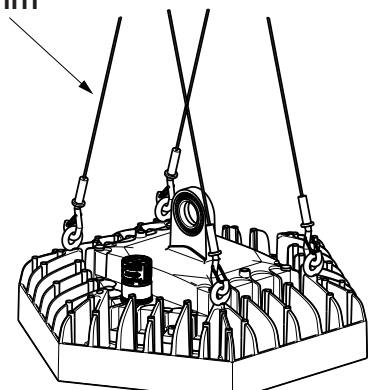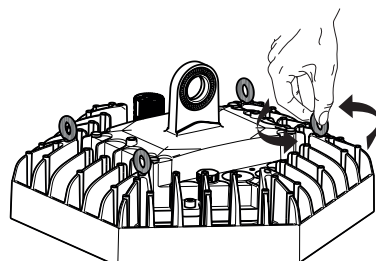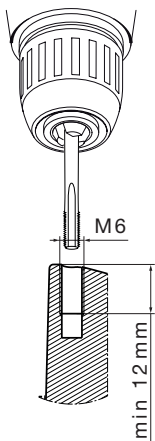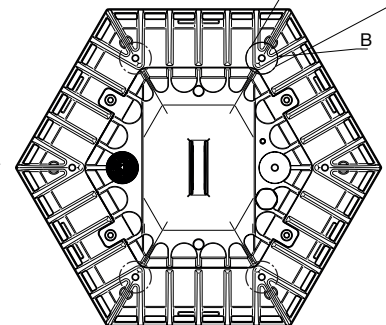





ELLIPTICAL

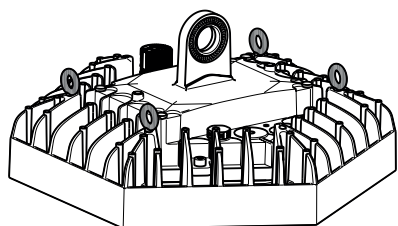


+

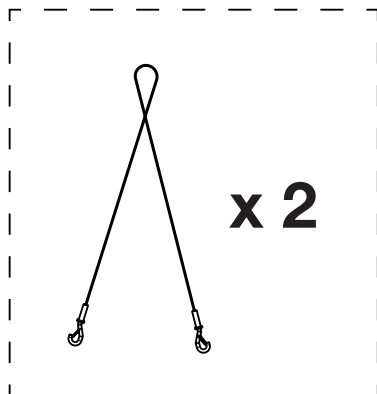


L=500mm








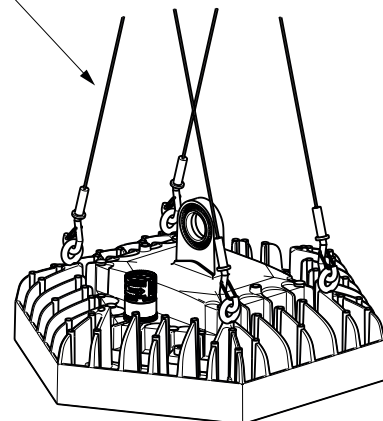


30° - 60° - 90° - ELLIPTICAL








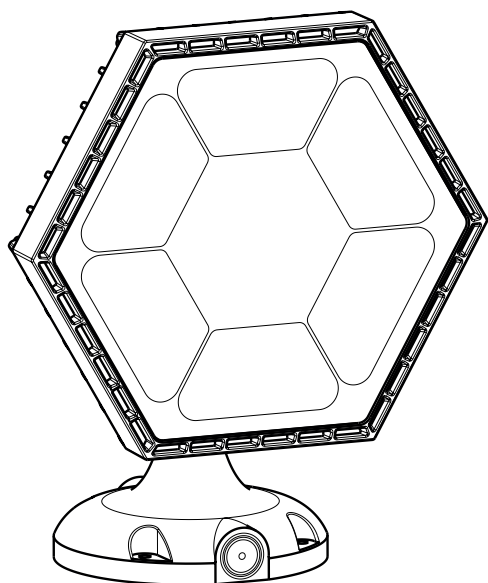





Max 25 Nm

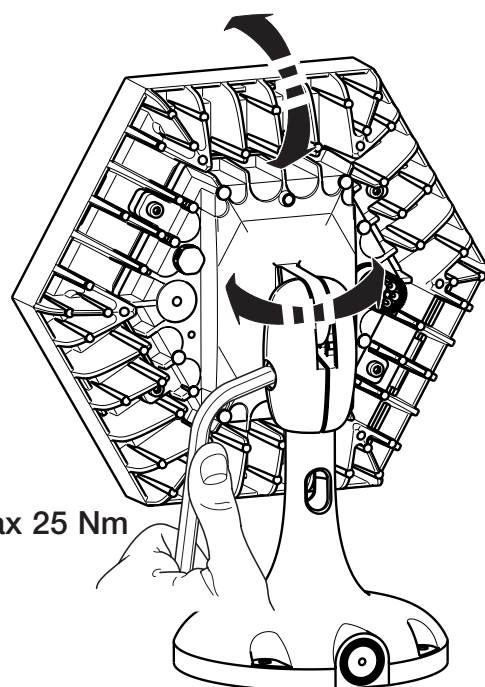

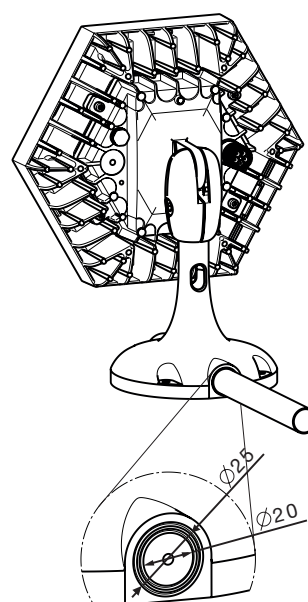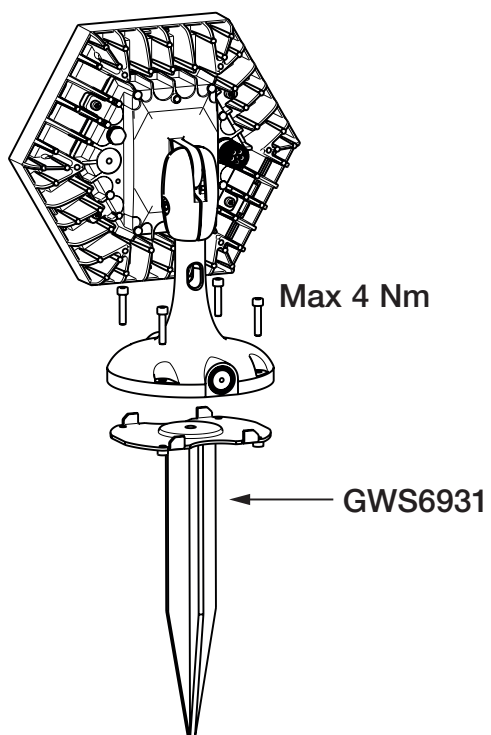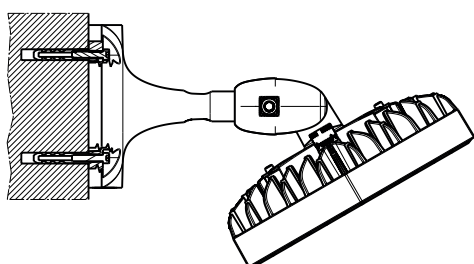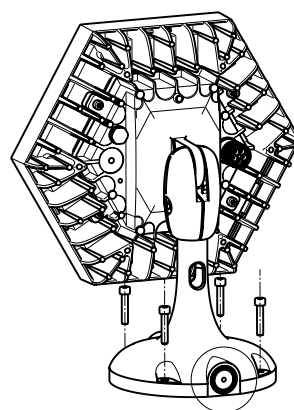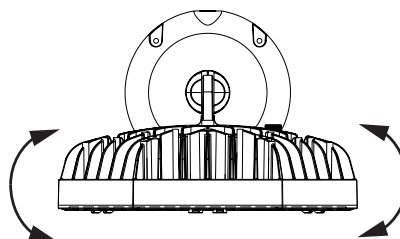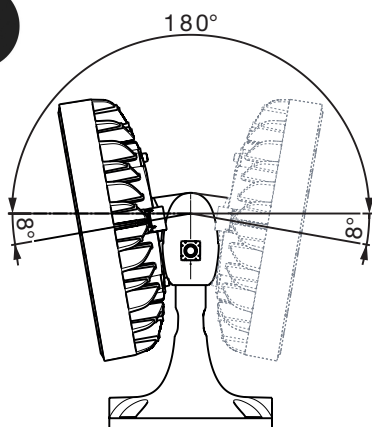

ON REQUEST

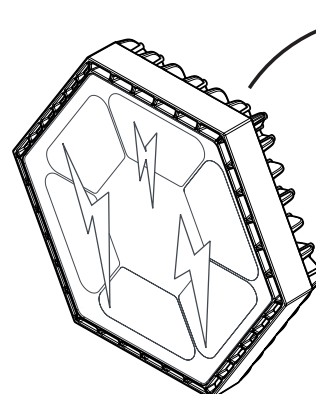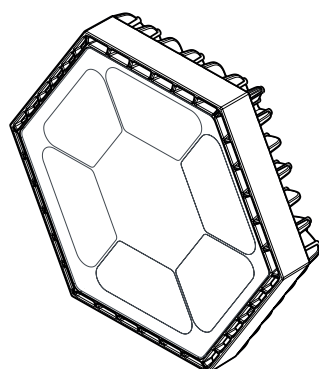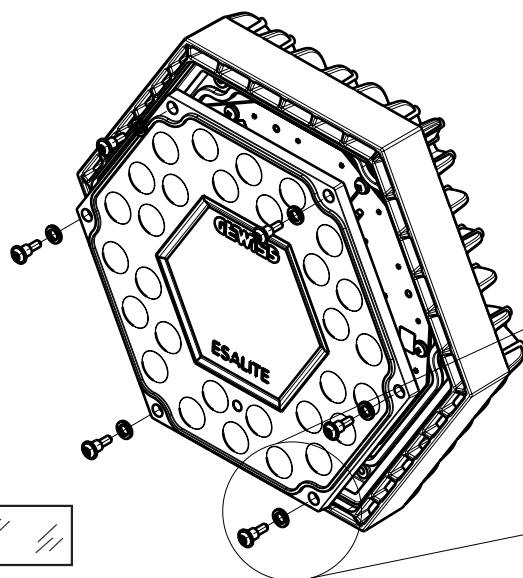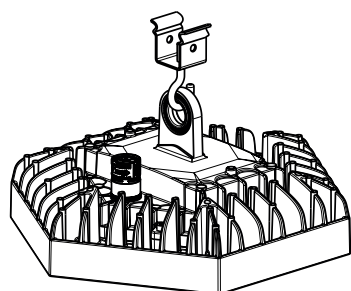

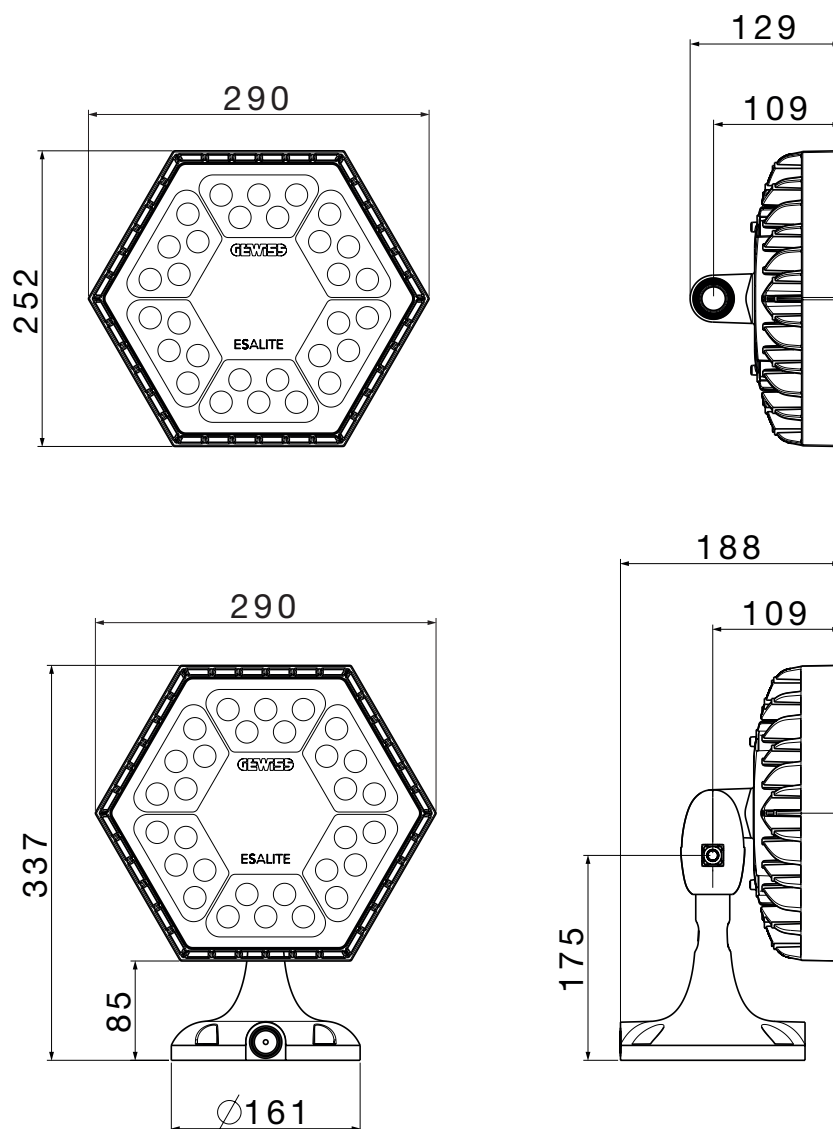

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:
Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com